


REVISIONS							
E.M.N. NO	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE	APPROVED
			X1		CHAU REF Clarified	1-31	
			X2		CR56, 57, 58, 59 Added	2-4	
			X3		R30, R52 Was 100K, R27 Was 8.2K, R40 Was 6.8K R65 Was 5.6K, R44 Was 220Ω, C8 Was 15uf.	3-5-80	
					ORIGINAL RELEASE	5-6-80	

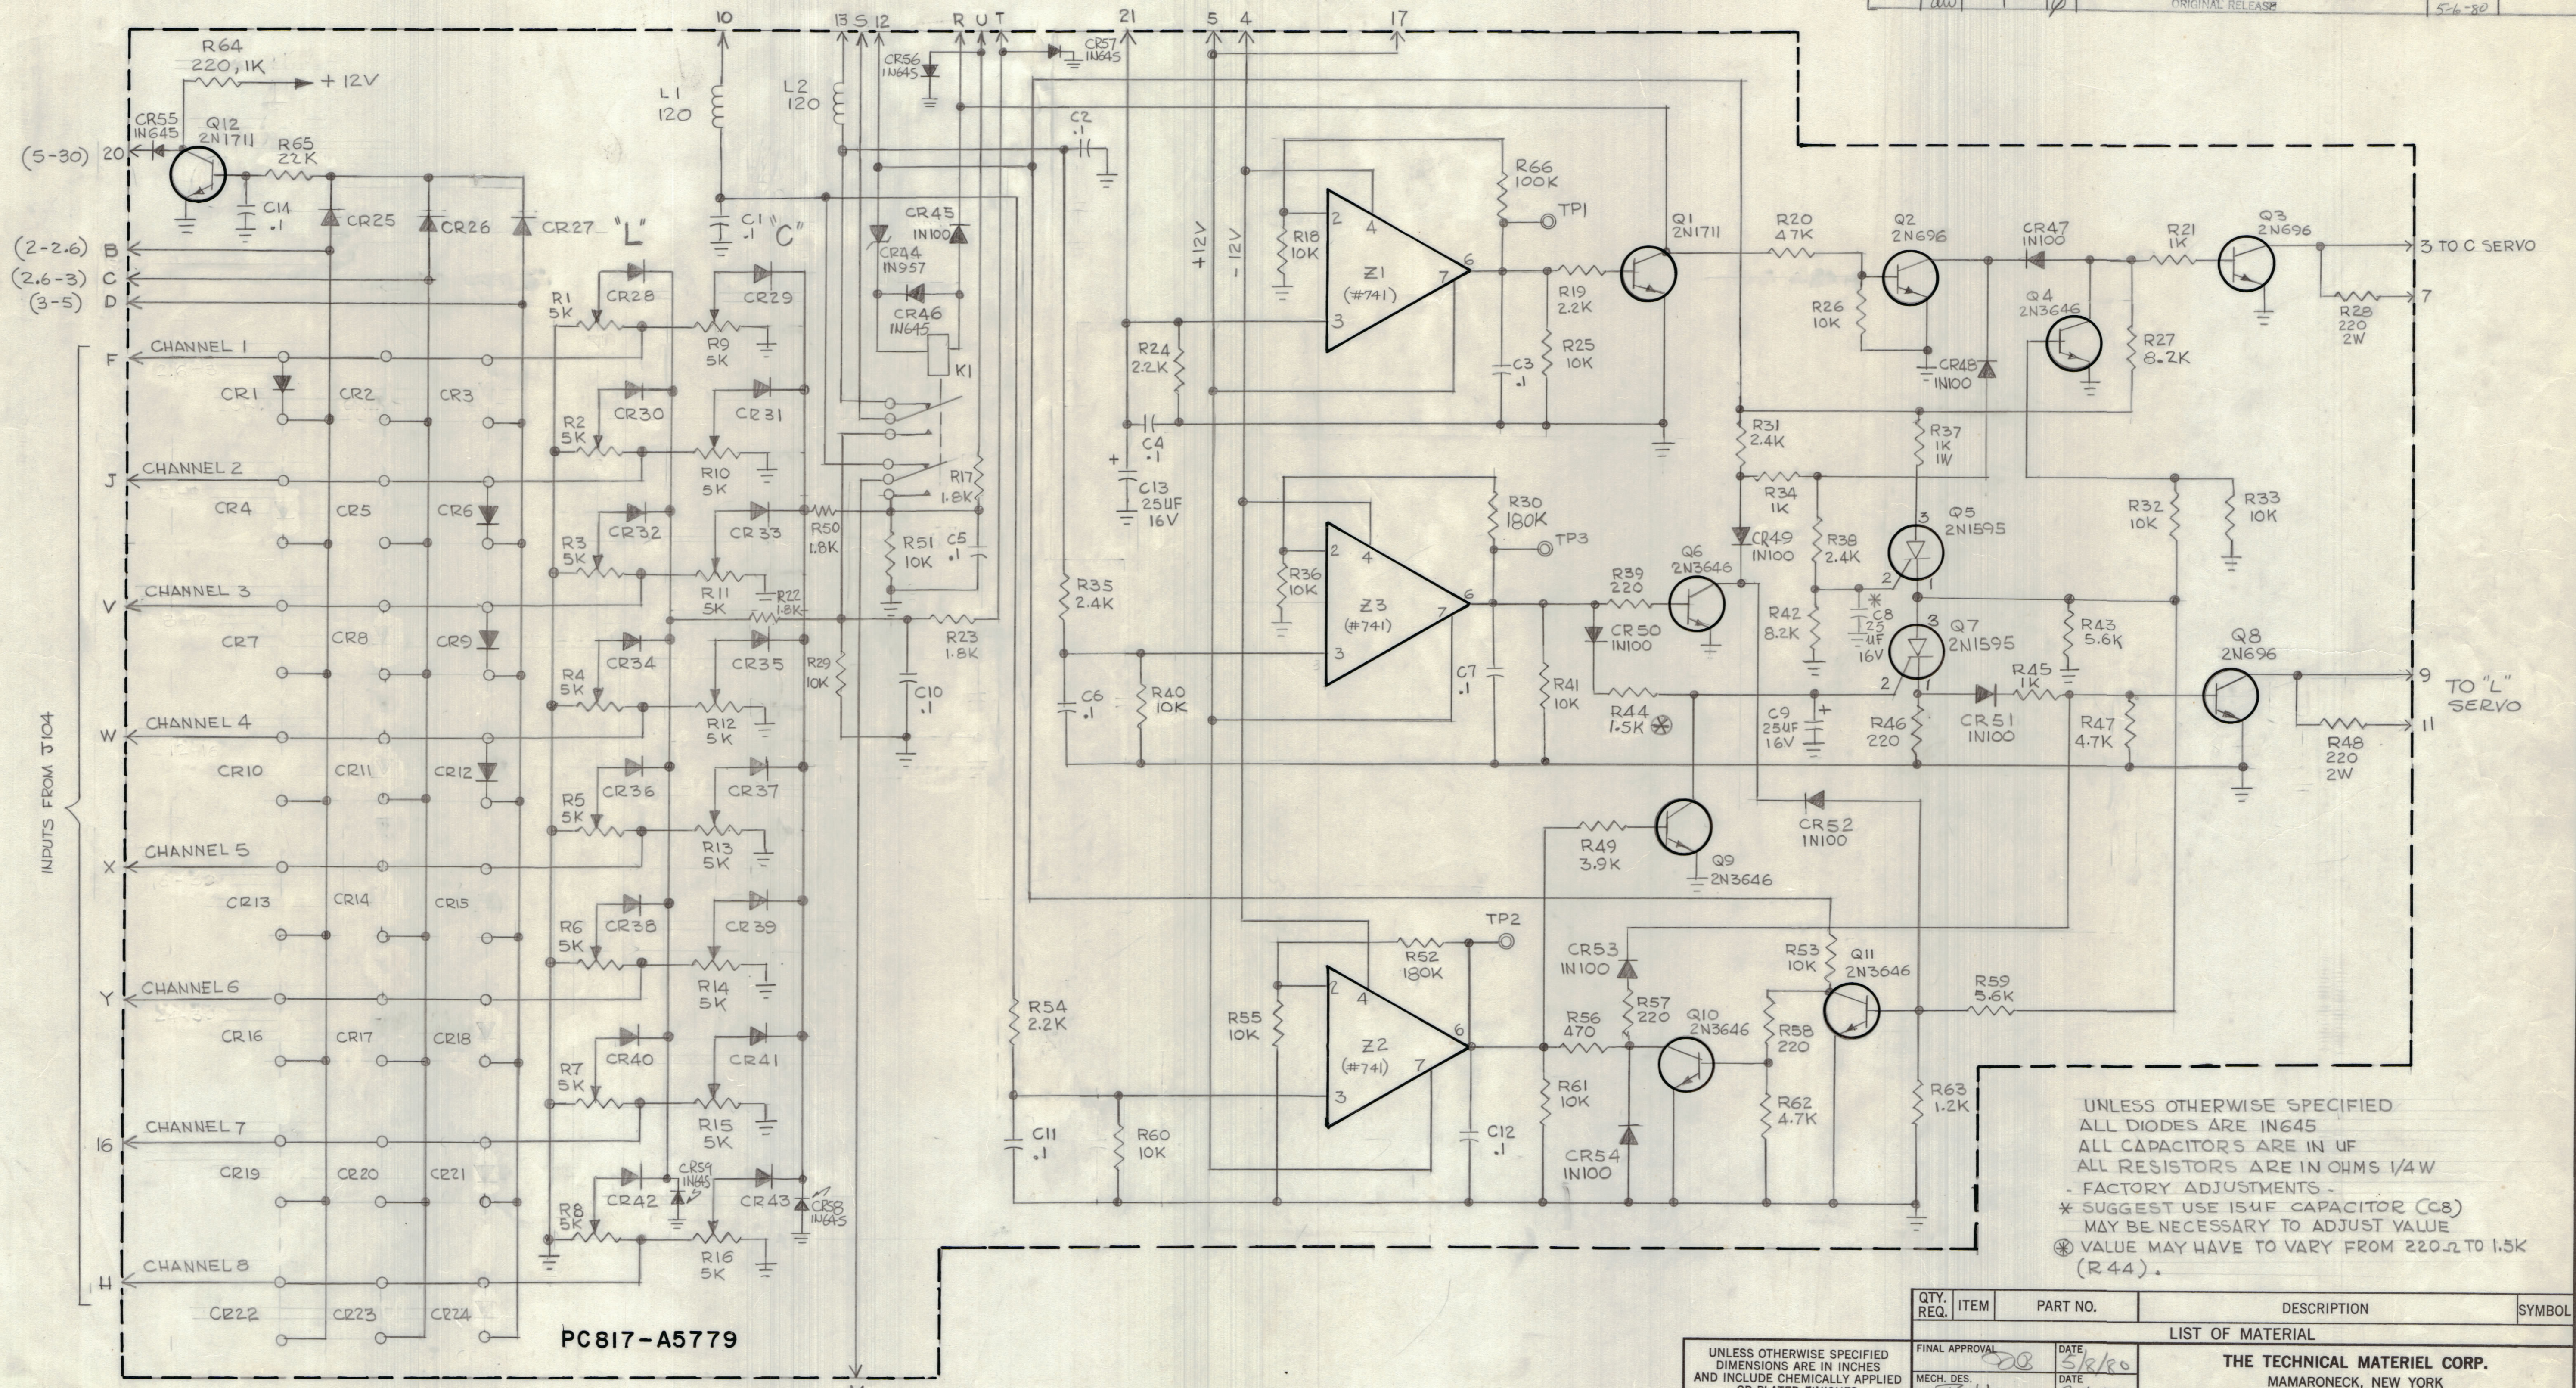

PC817-A5779

CR1 THRU CR43
TO BE 1N645

UNLESS OTHERWISE SPECIFIED
ALL DIODES ARE 1N645
ALL CAPACITORS ARE IN UF
ALL RESISTORS ARE IN OHMS 1/4W
- FACTORY ADJUSTMENTS -
* SUGGEST USE 15UF CAPACITOR (C8)
MAY BE NECESSARY TO ADJUST VALUE
⊗ VALUE MAY HAVE TO VARY FROM 220Ω TO 1.5K
(R44).

LAST SYMB	MISSING SYMB.
C14	
CR55	
K1	
Q12	
R66	
Z3	

QTY / UNIT	MODEL USED ON	ASS'Y NO.
1	ATS-3C	A5779
APPLICATION		
CODE		

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

LIST OF MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			
FINAL APPROVAL		DATE	
MECH. DES.		DATE	
ELECT. DES.		DATE	
CHECKED		DATE	
DRAWN		DATE	
MATERIAL			
FINISH			
SIZE	CODE	IDENT NO.	DWG NO.
D	82679	CK2227	
SCALE	SHEET		OF

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

DIAGRAM: SCHEMATIC
PRE-POSITION (ATS-30)

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.