REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CK-661	E
	TTRT-1				

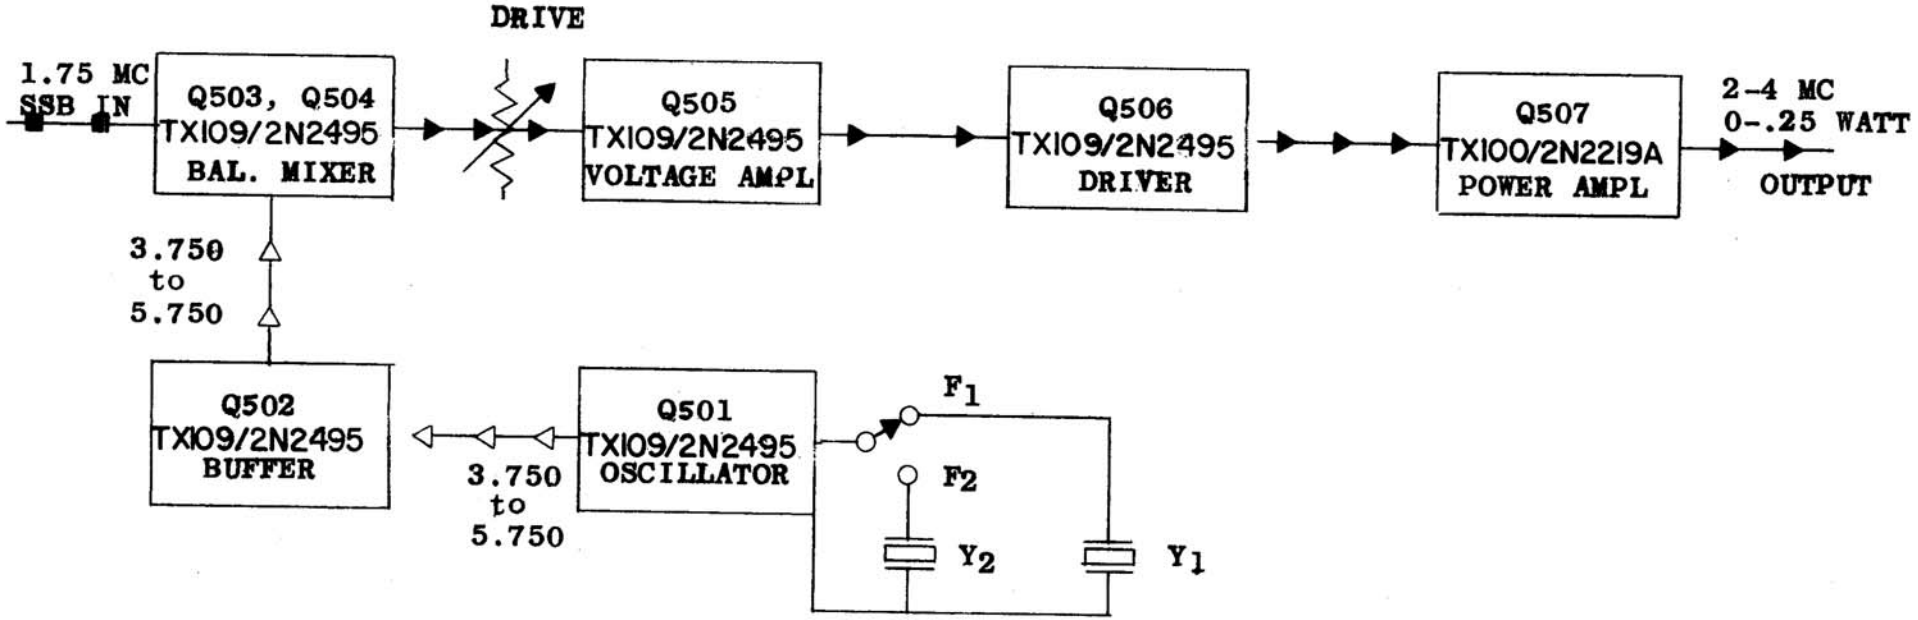

-12 VDC to Q501 thru Q506
+12 VDC to Q505 and Q506
-40 VDC to Q507

INTERMEDIATE FREQUENCY - 1.75 MC
R. F. FREQUENCY - 2-4 MC
INJECTION FREQUENCY - 3.750-5.750 MC

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
E	ALL 2N2495 WERE 2N2496	11/2/65	15482	D.V.		
D	ALL 2N2496 WAS 2N2084.	10/8/65	14937	D.V.V.		
C	P/N "TX109/2N2084" WAS "2N2084" (5 PL) "TX100/2N2219A" WAS "2N2219" (1 PL)	4.21.64	13897	D.L.		
B	SYMB. WERE 800 SERIES	8.13.64	11854	WB		
A	"DRIVE" SYM. RELOCATED	5-1-64	11341	WB		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ± .01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			KOHN/PALLER	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BLOCK DIAGRAM, XMTR CONVERTER
TTRT-1, 2-4 MC

DRAWN	CHECKED	FINAL APPROVAL
WAP 1/6/64	RK	BP

ELEC. DES. APP. | MECH. DES. APP.

CK-661 E

TMC FORM 108-A