

CL-110 A



**STANDARD DRAWING**

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

TSC NO.	CAT. NO.	INDUCTANCE Mh	CURRENT		APPROX. RES. OHMS
			RATED MA.	MAX. MA.	
CL-110-1	R-300-0.5	0.5 ± 10%	250	300	7 ± 10%
CL-110-2	R-300-J	1.0 ± 20%	250	300	11 ± 15%
CL-110-3	R-300-2.5	2.5 ± 10%	250	300	17 ± 10%
CL-110-4	R-300-5	5 ± 10%	250	300	24 ± 10%

USED ON  
 MODEL PROJECT NO. ASSY. NO. DATE

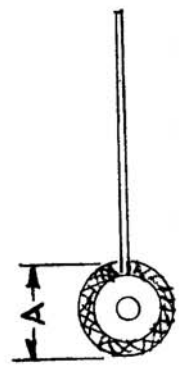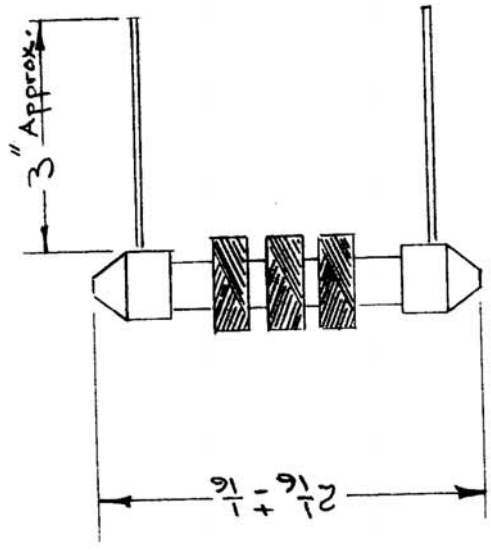

- NOTE:**
1. PIGTAILS # 19 A.W.G. TINNED COPPER WIRE.
  2. FORM-CERAMIC.
  3. FINISH-FUNGUS RESISTANT VARNISH.

Ref: National Co., Inc. R-300

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		CHOKES, R.F.	
		STOCK SIZE	
		MATERIAL	
		WEIGHT PER PC.	
		TYPE & TEMPER	
		ELEC. DES. APP.	MECH. DES. APP.
		CHECKED	FINAL APPROVAL
			CL-110
			A

A	CATALOG CHART CLARIFIED	8-14-62	7022	95	J.H.B.
	CHM CHART CLARIFIED				
ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER
					ENG. APP.
TOLERANCES					
SCALE					
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					
ALL OTHERS	DEC. DIM. ±				
	FRAC. DIM. ±				
	ANGULAR DIM. ±				