REQ. PER UNIT	USED ON			CL-212	B
	MODEL	ASS'Y. NO.	DATE		
	AO-101	AO-102			

ELECT. SPECS.

Total Ind- .95 -1.01 uhy

Q at test Freq - 90 or Greater

Freq. (Test) - 25 mc

MECH. SPECS.

Wire - #30 Magnet Wire

Core - Powdered Iron

Form - Phenolic

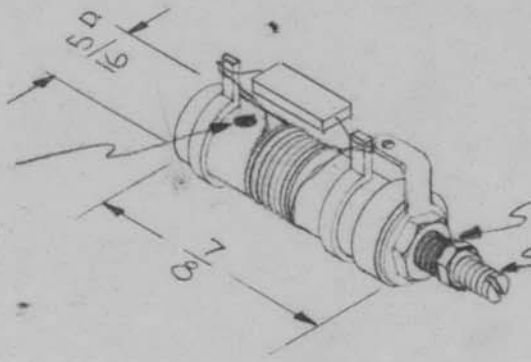



Hardware Supplied -

One ea. 3-48 Hex Locking Nut
One ea. 8-32 Hex Mtg. Nut
One ea. #8 Internal Lockwasher

} Brass, Nickel Plate

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		Q WAS 100	7-22-66	16619	RME		
A	9	Q WAS 115	4-6-64	11159	A.M.		G.J.B.

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE - NONE

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED, 18 MC

DRAWN	CHECKED	FINAL APPROVAL
	AG	

ELEC. DES. APP	MECH. DES. APP	
		CL-212 B

2A-1445-9

FORM 108-A