| REQ. PER UNIT | USED ON | | | CL-229 |
|---|---|---|---|---|
| | M DEL | ASS'Y. NO. | DATE | |
| 1 | CLL | | | |

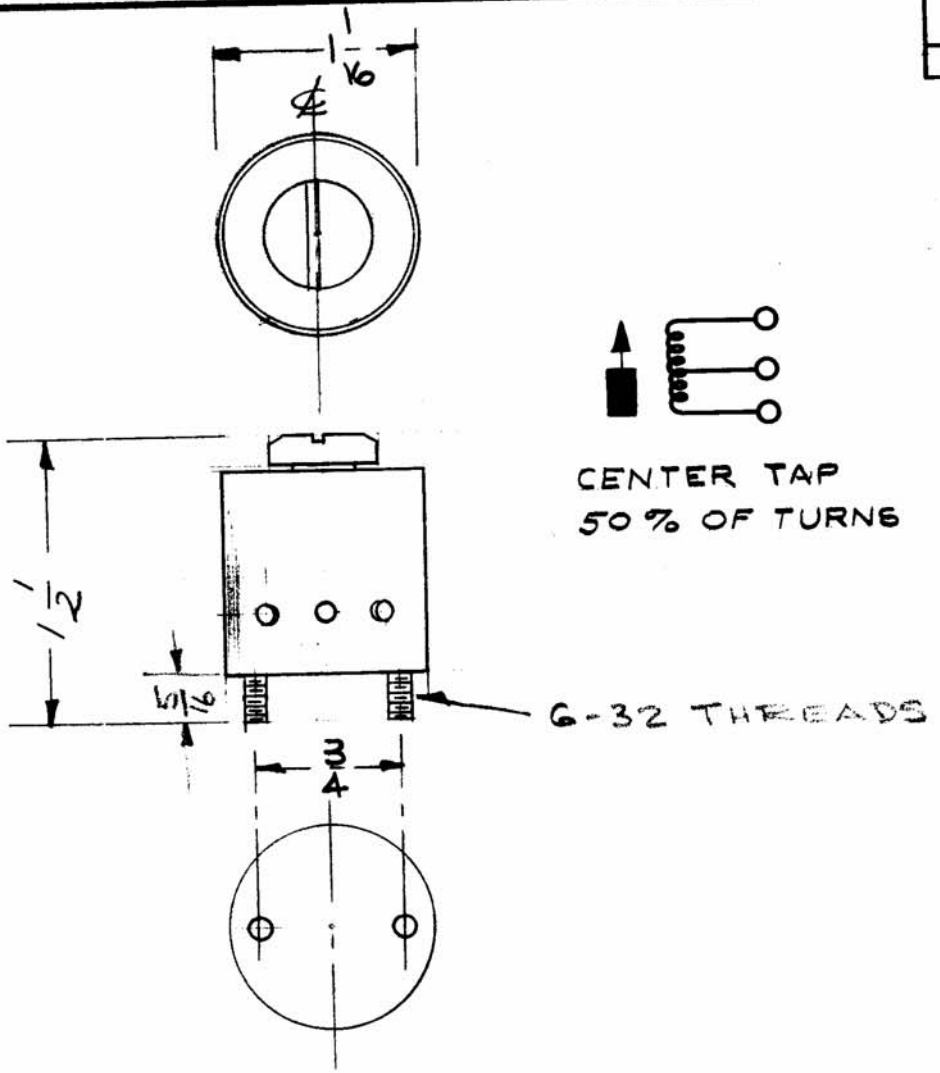




CENTER TAP
50% OF TURNS

NOMINAL INDUCTANCE : 10.05 MH

Q = AT 18 KCS GREATER THEN 100

STYLE : AT 6

SCREW ADJ. :-10% OF NOM-IND.

| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | | |

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TOROID, VARIABLE

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPR VAL

FINISH & SPEC. NO. | ELEC. DES. APP | MECH. DES. APP

CL-229

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 5-401-95 ( )

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES