REQ. PER UNIT	USED ON			CL-251	A
	MODEL	ASS'Y. NO.	DATE		
	CHG-1		9-26-1960		

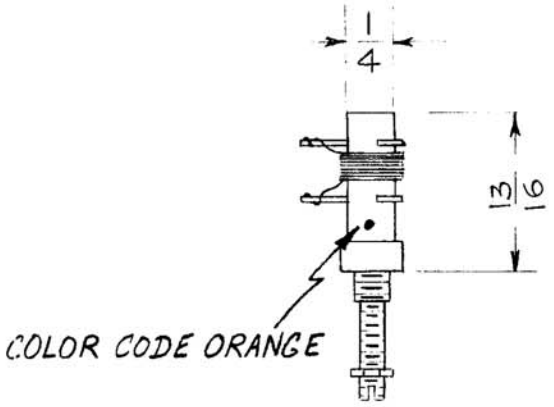

OPER FREQ MCS.	SYM.	TEST FREQ.	Q. AT TEST FREQ MUST BE GREATER THAN	NOMINAL IND(uhy) W/O CORE
26	L1119	25MC	85	0.45
26	L1111	25MC	85	0.45
28	L1112	25MC	85	0.45

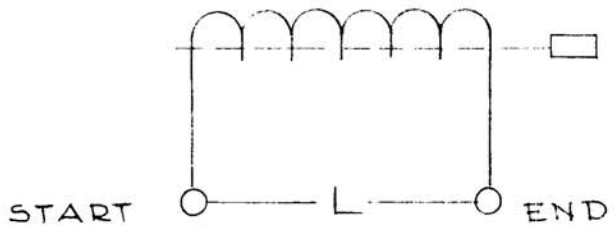

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	2	CHART WAS 2 REQ PER UNIT	12-20-60	3786	M.A.F.		
	1	COLOR CODE ORANGE ADDED					

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1981-6

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

COIL, RF, TUNED

DRAWN	CHECKED	FINAL APPROVAL
G. DE LUCIA		
ELEC. DES. APP	MECH. DES. APP	CL-251 A
A.R.F.		

FORM 108-A