
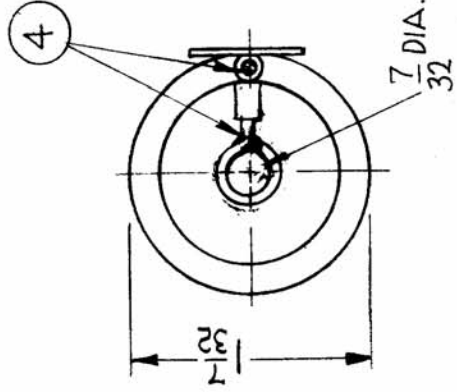


CL 325 B

USED ON
 ASSY. NO. A-3469
 DATE 3-10-64

MODEL GPT-40K() 4

REQ. PER UNIT

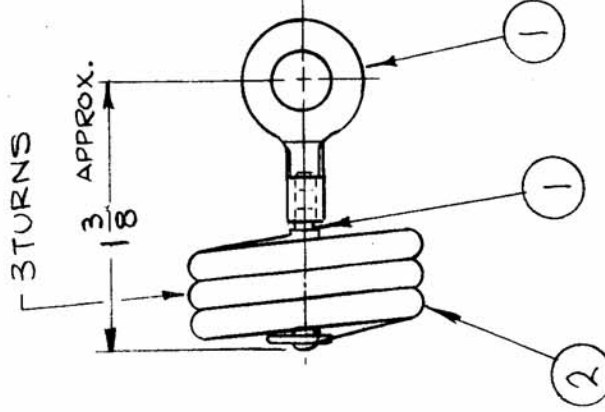

ELECTRICAL SPECIFICATIONS

$L = .23 \mu H \pm 10\%$

$Q = 175$ OR GREATER AT 25 MC

NOTES:

- S245 SILVER PLATE ITEM 1
- TO TEST COIL USE ITEM 1, SOLDERED TO CENTER LOOP.

SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	REVISED COMPLETELY	9/11/67	18475	EJ	[Signature]	FB
A	DUPLICATE DWG. OBSOLETE.	1/13/65	13189	[Signature]	[Signature]	[Signature]
O	ORIGINAL RELEASE FOR PRODUCTION	5/11/64				
SCALE	1 : 1					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						
DECIMALS						
X ± .05						
.XX ± .01						
.XXX ± .005						
FRACTIONS						
± 1/64						
ANGLES						
± 0° 30'						
TOLERANCES	A					
CODE	1A-353A					

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 4	BS100	SOLDER, TIN ALLOY	
1	TE141-4	TERMINAL, LUG	
11	PX370-8-7	INSULATION SLEEVING, TEFLON	
11 3/4	WL100-1	WIRE, BUSS-BAR, TINNED	
		F BUDETTI	
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
MATERIAL		COIL, ELECTRICAL	
TYPE & TEMPER		DRAWN	FINAL APPROVAL
HEAT TREAT. SPEC.		AD	CL 325 B
FINISH & SPEC. NO.		2B	
		ELEC. DES. APP. MECH. DES. APP.	