REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL351	Ø

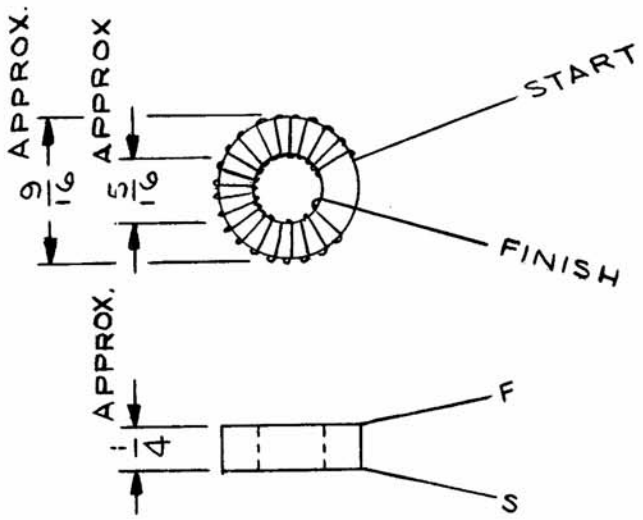

MODEL	REQ'D	FUNCTION	FREQ. (KC)	SYM
FX211	2	LOW PASS FILTER	30-600	L1 & 2

-ELECTRICAL SPECIFICATION-

INDUCTANCE @ 2.52 MC: 89 μh ±5%
"Q" @ 2.52MC- 150
UNIVERSAL WINDING
CORE: POWDERED IRON

SCHEMATIC



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/19/65	Ø	RF		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE 8A-3223-39

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

POSC

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF, TOROID

DRAWN	CHECKED	FINAL APPROVAL
J.L. 4/19/65		
ELEC. DES. APP.	MECH. DES. APP.	CL351 Ø
JAB		

REPROVEL NO. 440H 23845

TMC FORM 108-A