
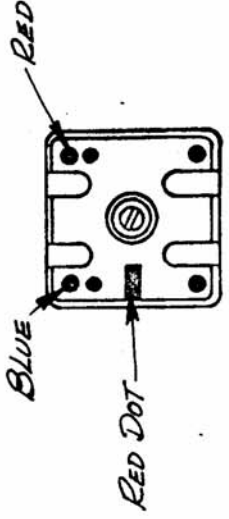



REQ. PER UNIT	USED ON	MODEL	ASSY. NO.	DATE
1	CMRA-1	A4216	5-17-65	


CL377 A



ELECTRICAL SPECS.  
(W/O SLUG)  
OPERATING FREQUENCY:  
INDUCTANCE @ 6mc  
PRIMARY:  $1.5 \mu h \pm 0.2 \mu h$

"Q" (PRIMARY) @ 6mc Min. 40  
MECHANICAL SPEC.

URNS  
PRIMARY: 27  
COLOR CODE: RED  
CASE: COPPER CAN  
CASE FINISH: TIN-PLATED  
QUANTITY TERM: 4  
MATERIAL:  
CORE & SLUG: POWDERED IRON



**SCHEMATIC DIAGRAM**

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	A	THE TECHNICAL MATERIEL CORP. MAMARONECK. COIL, RF, ADJ. SYN-A-16	A
STOCK SIZE			
MATERIAL			
TYPE & TEMPER		HLA	
HEAT TREAT. SPEC.			
FINISH & SPEC. NO.			
DATE	7-19-66	7/19/66	
CH. NO.	16576		
DRAFTS	A		
CHECKER	HLA		
ENG. APP.			
DESCRIPTION	PRI. IND. WAS ± 2.0uh		
	ORIGINAL RELEASE FOR PRODUCTION		
	EXPER. RELEASE		
SCALE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			
DECIMALS			
.X ± .05			
.XX ± .01			
.XXX ± .005			
FRACTIONS			
± 1/64			
ANGLES, ± 0° 30'			
TOLERANCES			
CODE	A		
2A4276			
CL377			
FINAL APPROVAL			
ELEC. DES. APP.			
MECH. DES. APP.			