
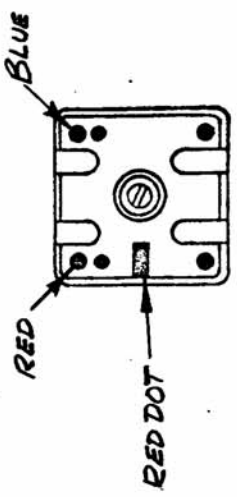



REQ. PER UNIT 1	MODEL CMEA-1	ASSY. NO. A421G	DATE 5-13-65	USED ON CL379	B
--------------------	-----------------	--------------------	-----------------	------------------	---



SCHEMATIC DIAGRAM

**ELECTRICAL SPECS.
(W/O SLUG)**

OPERATING FREQUENCY:
INDUCTANCE @ 3 mc
PRIMARY: 12 μ h \pm 1.0%
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 3 mc Min. 40

MECHANICAL SPEC.

URNS
PRIMARY: 46
SECONDARY: Not Used
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B		RELOC. CL379 TOP VIEW	
A		FRY. IND. WAS 10.5uh 7/18/66	
Ø		ORIG. RELEASE 5/14/65	
X		EXPER. RELEASE	
SYM		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			
DECIMALS			
.X ± .05			
.XX ± .01			
.XXX ± .005			
TOLERANCES ± 1/64 ANGLES ± 0° 30'			
CODE A			
SCALE			
DATE			
CH. NO.			
DRAFTS			
CHECKER			
ENG. APP.			
STOCK SIZE			
MATERIAL			
TYPE & TEMPER			
HEAT TREAT. SPEC.			
FINISH & SPEC. NO.			
ELEC. DES. APP.			
MECH. DES. APP.			
DRAWN			
CHECKED			
FINAL APPROVAL			
H.A.			
COIL, RF, ADJ.			
SYN - A - LI			
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CL379			