

SYMBOL: CL400 B



FUNCTION: IF INTERSTAGE
 OPER. FREQ.: 1.75 MC
 QUAN.: 1

USED ON: ASSY. NO. A 4 469
 MODEL: DATE

WINDING DATA
 WINDING NO. 1
 NOMINAL INDUCTANCE: 4.5 uh
 NO. OF TURNS: 32
 NO. OF TAPS: NONE

COIL FORM DATA
 MATERIAL: POWDERED IRON
 MOUNTING DATA
 METHOD: SINGLE HOLE
 DIMENSIONS: 3/16 DIA.
 TERMINALS:
 QUAN.: 2
 TYPE: WIRE LEAD (PRI. 1" LONG)

ELECTRICAL SPECIFICATIONS
 INDUCTANCE (PRI) L = 4.5UH ± .200UH
 MIN. Q = 100 At 7.9 MC.
 D. C. RESISTANCE = NOT RATED
 CURRENT RATING = NOT RATED

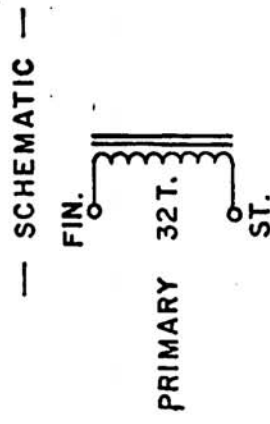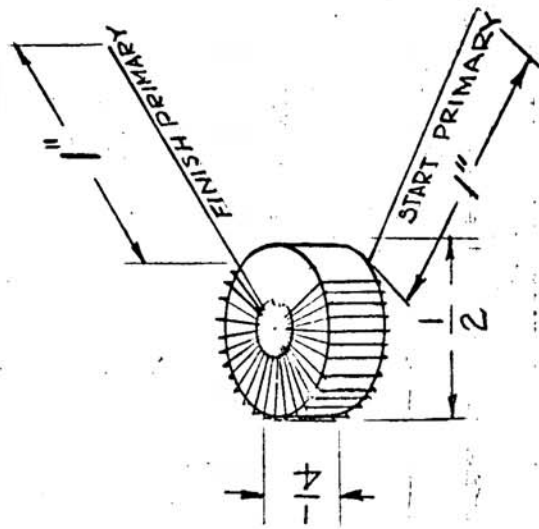

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, INTERMEDIATE FREQ., FIXED	
		2. U220	
		DRY CLEAN	
		CHECKED	
		FINALS APPROVAL	
		ELEC. DES. APP. MECH. DES. APP.	
		ML	
		CL400 B	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		COIL, INTERMEDIATE FREQ., FIXED	
		2. U220	
		DRY CLEAN	
		CHECKED	
		FINALS APPROVAL	
		ELEC. DES. APP. MECH. DES. APP.	
		ML	
		CL400 B	

SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	"Q" VALUE WAS "200"	3.15.67	17963	WHD		
A	Add reference IA4470	7/6/66	EMN	CV		
X	ORIGINAL RELEASE FROM 6-24-66					
X	EXPERIMENTAL RELEASE 6-24-66					

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	CODE
DECIMALS ± .05 .XX ± .01 .XXX ± .005	DO NOT SCALE	A
FRACTIONS ± 1/64 ANGLES ± 0° 30'		IA4470