


|               |       |           |        |
|---------------|-------|-----------|--------|
| REQ. PER UNIT | MODEL | USED ON   | CL 499 |
| 1             | RFP-1 | ASSY. NO. |        |
|               |       | DATE      |        |
|               |       | 2-9-76    |        |

STRIP & TIN  
BOTH LEADS

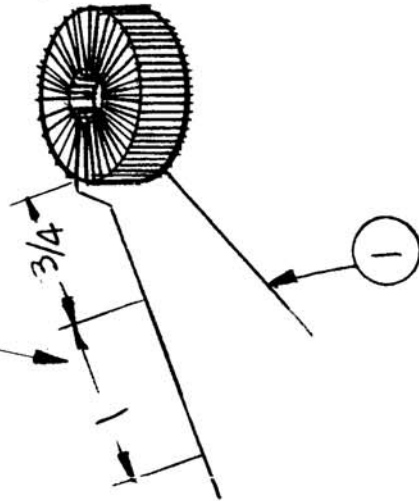

— ELEC. SPECIFICATION —  
L = 110 MH ± 0.5  
Q = 200 MIN

| REQ. ITEM                                       | DESCRIPTION                 | SYMBOL |
|---|-----------------------------|--------|
| X 3   | GL102 Q - MAX               |        |
| X 2   | WI141-20-2 WIRE, ELEC. MAG. |        |
| 1   | CI 143 CORE, TOROIDE        |        |
| TMC INDUSTRIAL CORP.<br>MAMARONECK.<br>NEW YORK |                             |        |
| COIL, R.F.                                      |                             |        |
| STOCK SIZE                                      |                             |        |
| MATERIAL  |                             |        |
| TYPE & TEMPER                                   |                             |        |
| HEAT TREAT. SPEC.                               |                             |        |
| DRAWN   |                             |        |
| CHECKED   |                             |        |
| ELEC. DES. APP.                                 |                             |        |
| MECH. DES. APP.                                 |                             |        |
| FINISH & SPEC. NO.                              |                             |        |
| G.D.L.  |                             |        |
| CL 499  |                             |        |

DATE 2-11-80  
CH. NO. H  
DRAFTS MRC  
CHECKER  
ENG. APP. RB

SCALE:  
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
REMOVE ALL BURRS AND SHARP EDGES

TOLERANCES  
DEC. DIM. ±  
FRAC. DIM. ±  
ANGULAR DIM. ±