



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

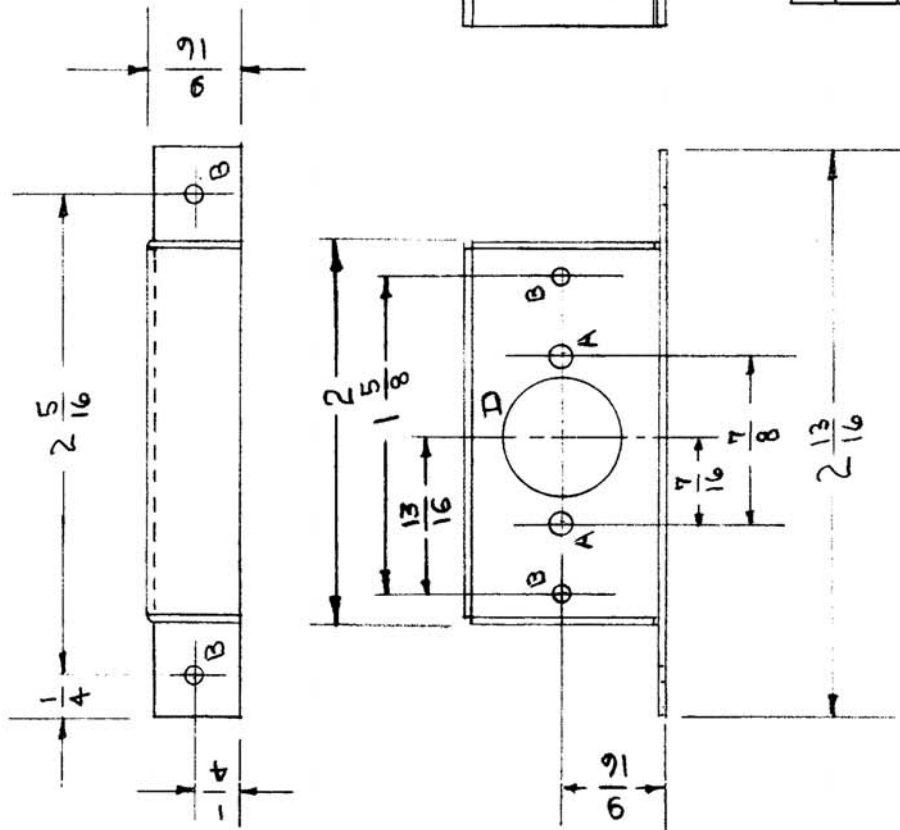

NOTE: 1.- ALL DIMENSIONS OUTSIDE
2.- INSIDE RADIUS BENDS 1/16

A- 9/64 D (.140) 2 HOLES REQ.
B- 1/64 D (.172) 4 HOLES REQ.
D- 5/8 D (.625) 1 HOLE REQ.



FP-104 B		USED ON	
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
DMK-4	140	A-129	8-19-52

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
.051		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
ALUMINUM	—H—	BRACKET, TUBE	
MATERIAL	WEIGHT PER PC.		
52S-H32			
TYPE & TEMPER			
H			
HEAT TREAT. SPEC.			
S404-IRIDITE			
FINISH & SPEC. NO.			
			FP-104 B

ISSUE ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
B 1	S404 IRIDITE WAS S101 CAUSTIC DIP	12-3	1001	P		EMN
A 2	1 5/8 WAS 1 1/16	3/4/54	24	16	JAB	WDR
A 1	1 3/16 WAS 2 1/32					
TOLERANCES						
SCALE FULL						
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.						
ALL OTHERS	DEC. DIM. ±					
	FRAC. DIM. ±	L4				
	ANGULAR DIM. ±					