


NO LONGER USED
REPLACED BY FP-174-2

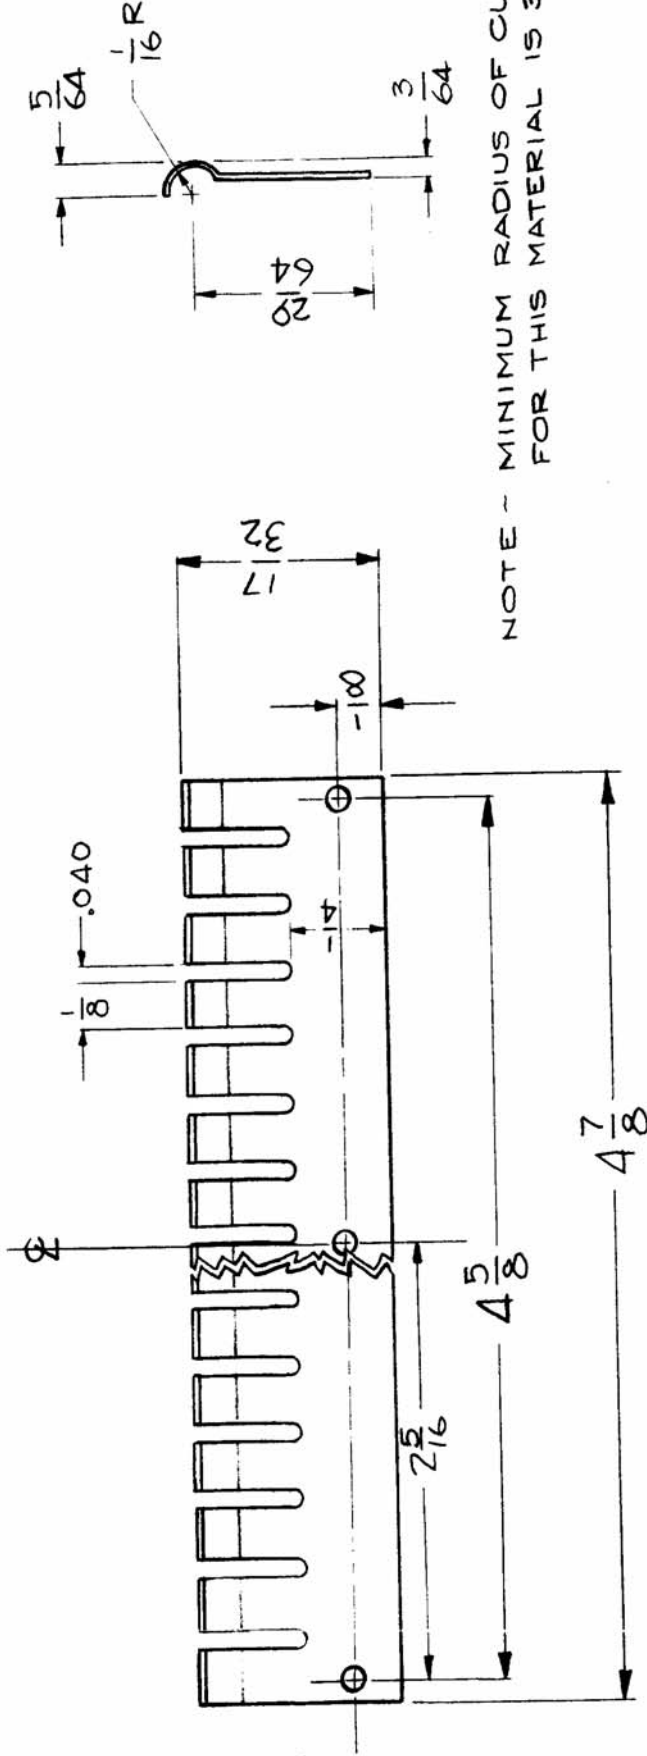

NOTE - MINIMUM RADIUS OF CURVATURE
FOR THIS MATERIAL IS 3/4.

REQ. PER UNIT	MODEL	USED ON
Z	3WR-3000CU	ASSY. NO.
		DATE
		1-26-59

FP-162

REG. ITEM	REG. ITEM	PART NO.	DESCRIPTION	SYMBOL
		.010	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		SPRING MATERIAL	PREFORMED, FINGER STOCK	
		MATERIAL		
ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS
TOLERANCES				
SCALE: S-401-23 (CF-100X)				
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				
DEC. DIM. ±				
FRAC. DIM. ±				
ANGULAR DIM. ±				
	J.C. BIELE	DRAWN	CHECKED	FINAL APPROVAL
				FP-162