

CLEAR # 6 SCREW
(4 HOLES)


FX208

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPER. RELEASE	1-5-64		G.D.L	
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-7-65		R.F.	

SPECIFICATIONS

- 3db POINT- 600kc ± 30kc
- 60 db POINT- 750kc OR LESS
- RETURN LOBES- GREATER THAN -60db
- PASSBAND RIPPLE- WITHIN 1.5db
- INSERTION LOSS (DC-500kc)- 1.0db MAX.
- INPUT IMPEDANCE- 52Ω±5%(TO 540kc)
- OUTPUT IMPEDANCE- 52Ω±5%(TO 540kc)
- CONNECTOR SERIES- BNC
- CASE MATERIAL- COPPER
- CASE FINISH- TMC GRAY, S115

FREQUENCY RESPONSE LIMITS

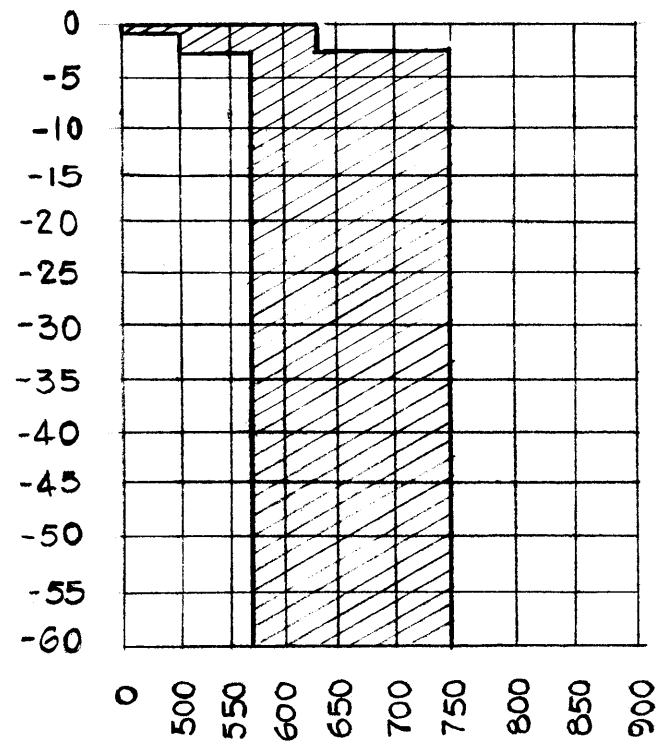

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
0. POSE				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE FILTER, LOW PASS	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN G.D.L DATE 1-5-64	FINAL APPROVAL RWC DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'
ELECT. RES.			DATE	FX208
MECH. RES.			DATE	Ø
SHEET			REV. LTR.	

1	VLRB-1	ASS'Y. NO.
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE C	5401-308

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES