


AZIMUTH SELECTION SWITCH

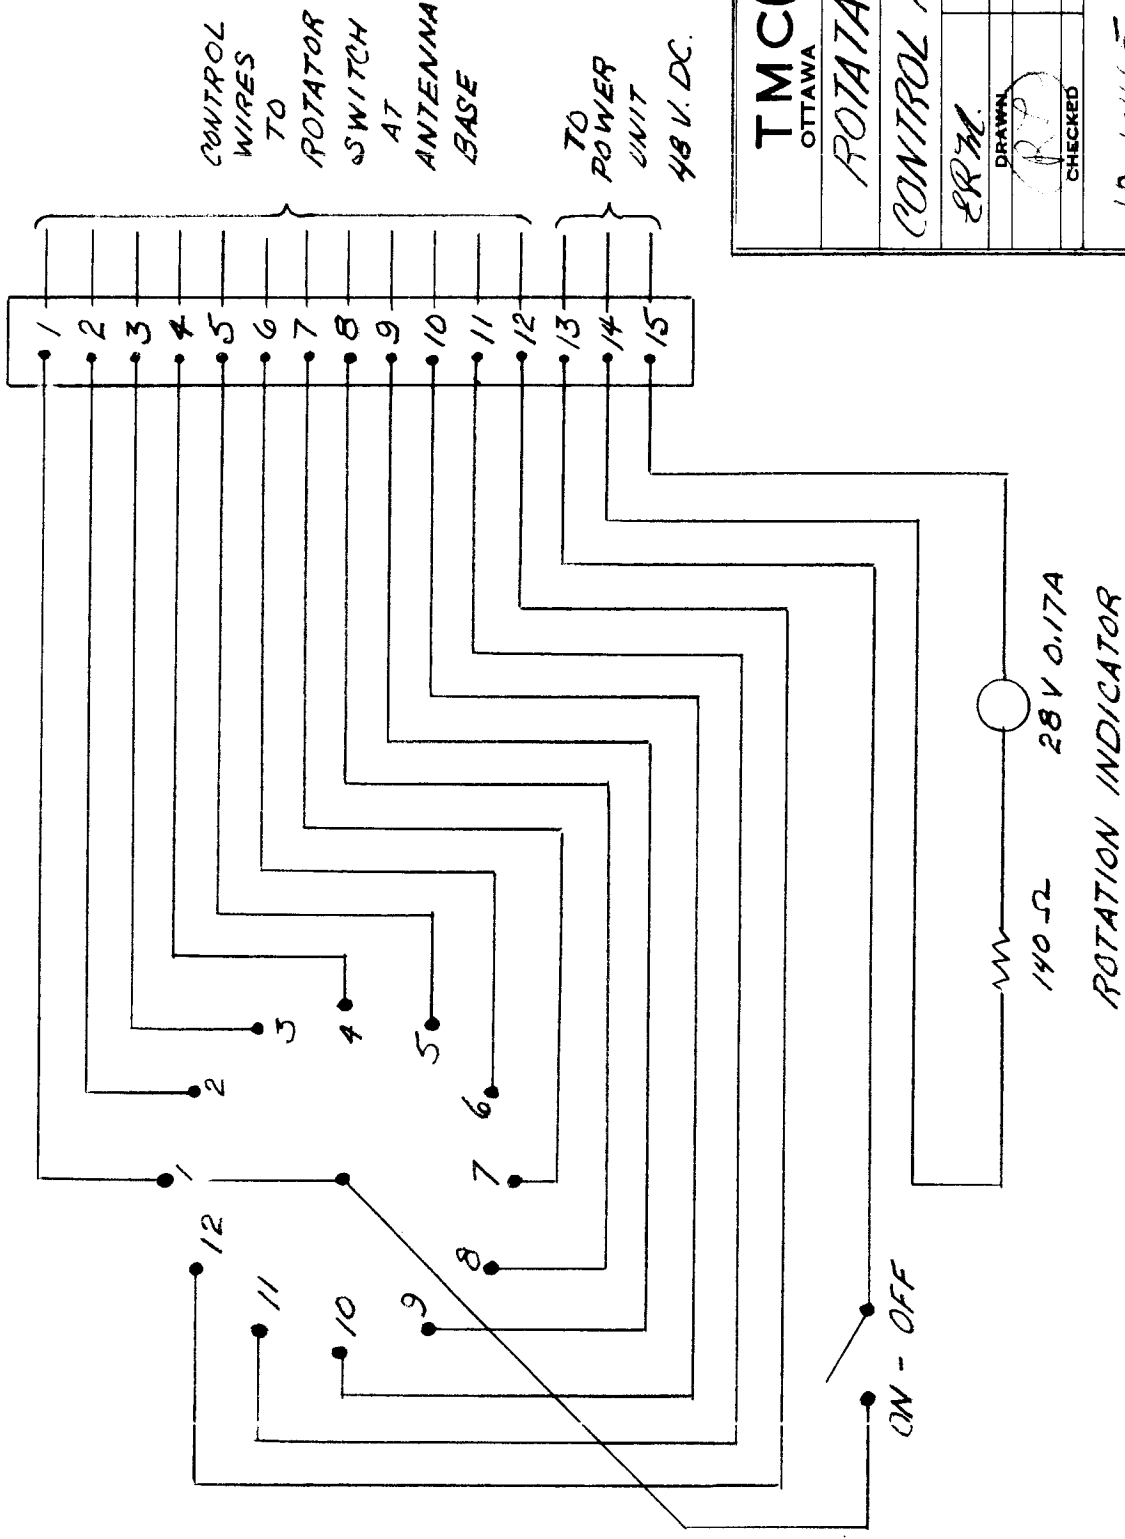

NOTES

1. CONNECTING CABLES 20 WIRE  
MAX. RESISTANCE 25Ω PER  
CONNECTOR
2. TERMS 14 & 15 HAVE POWER  
APPLIED ONLY WHEN ANT-  
ENNA IS ROTATING

<b>TMC (Canada) LIMITED</b> OTTAWA ONTARIO	
<i>ROTATABLE ANTENNA</i>	
<i>CONTROL PANEL SCHEMATIC</i>	
<i>ERM</i>	ELEC. DES. APP. <i>[Signature]</i>
DRAWN <i>[Signature]</i>	MECH. DES. APP.
CHECKED	FINAL APPROVAL
10-10465	Fig. 17

7110465