


REQ. PER UNIT	USED ON			NPG48	Ø
	MODEL	ASS'Y. NO.	DATE		
1	SWCU-1		8-21-64		

FINISH: REVERSE ETCH, ANODIZE ON LUSTER-LESS BLACK BACKGROUND (TYPE 37038 PER FED. STD. NO. 595.

COLORLESS VARNISH PER MIL-V-6894 MIN. LETTER SIZE-3/64 IN. HIGH.

ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY TMC.

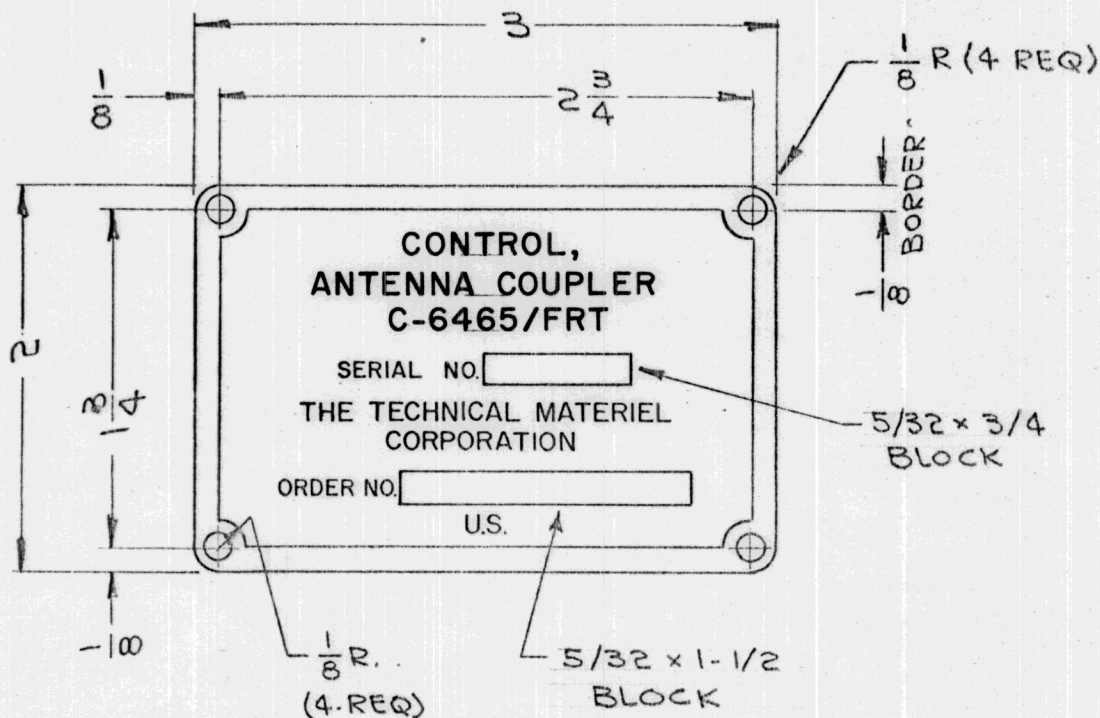

4 HOLES - 1/8 DIA.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231 AND AMENDS. (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9-15-64	Ø	J.L.	.032 THK STOCK SIZE		
X	EXPER. RELEASE	8-21-64	X	g. Lee	ALUMINUM		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE 1:1			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			FRACTIONS ± 1/64 ANGLES ± 0° 30'			NAMEPLATE, IDENTIFICATION	
TOLERANCES			CODE A			MATERIAL	
						5052-H32	
						TYPE & TEMPER HEAT TREAT. SPEC.	
						DRAWN CHECKED FINAL APPROVAL	
						SEE NOTE	
						FINISH & SPEC. NO.	
						ELEC. DES. APP. MECH. DES. APP.	
						NPG48 Ø	