


REQ. PER UNIT	USED ON		NP 888	Ø
	MODEL	ASS'Y. NO.		
	PAL-1KB1		12/30/66	

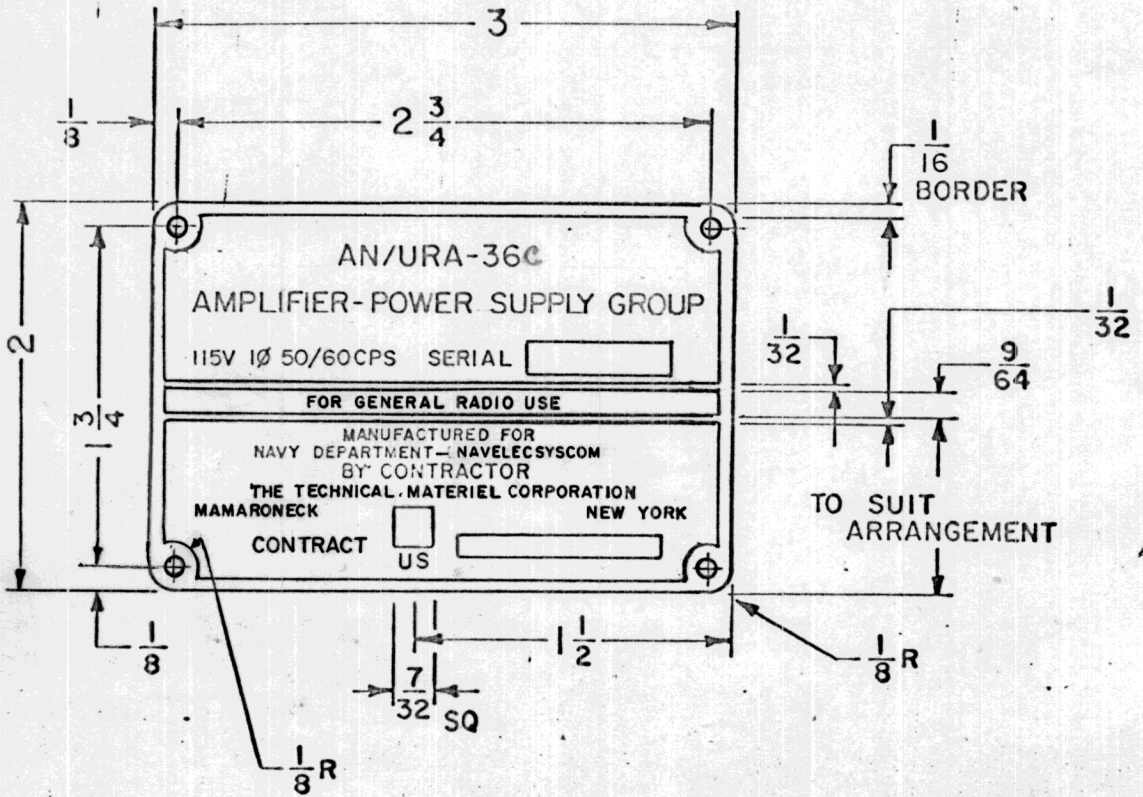

NOTE:
FINISH—REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.

4 HOLES 1/8 DIA.
SERIAL BLOCK 3/16 X 3/4
CONTRACT BLOCK 1/8 X 1-1/16

NAMEPLATE TO BE MANUFACTURED ACCORDANCE WITH MIL-15024 (SHIPS) TYPE "A", & AMENDS.

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		.032 THK. STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
Ø	ORIG RELEASE FOR PROD	6/21/67	Ø	RG			
X	EXPER. RELEASE	12/30/66	X	RME			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			SCALE		1:1		
DECIMALS X ± .03 XX ± .01 XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE		A	
TOLERANCES							
		5052-H32		MATERIAL		MODEL-PAL-1KB1	
		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	
		SEE NOTES				CHECKED	
		FINISH & SPEC. NO.				FINAL APPROVAL	
				ELEC. DES. APP.		MECH. DES. APP.	
						NP888	