B

PX-346

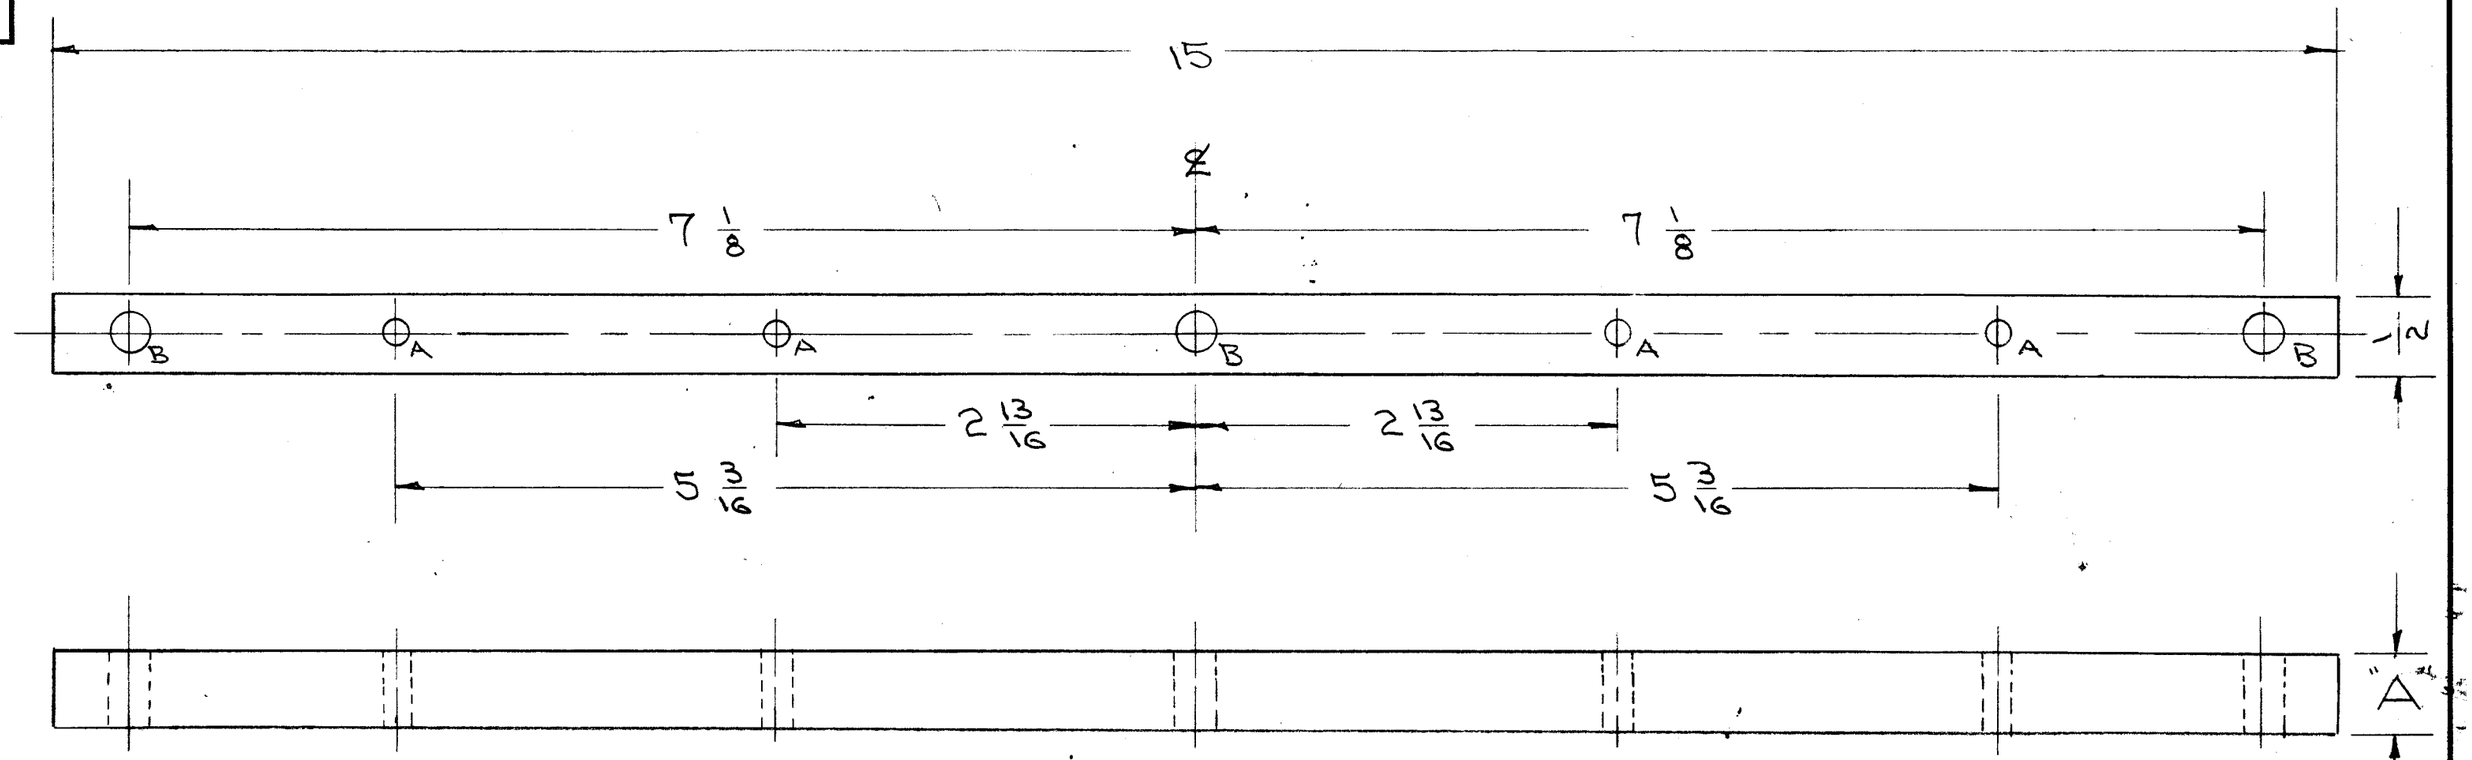

A - 11/64 (.171) DIA. 4 HOLES REQ
B - 9/32 (.281) DIA. 3 " "

NOTE
LACQUER ALL MACHINED EDGES

TMC NO	"A" THICKNESS
PX-346-1	1/4
PX-346-2	1/2

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	2	PX-346-2 was PX-346	10/23/57	2	JMC	LG	
	1	Standard Dwg Made					
A	1	1/2 x 1/2 Bar Was 1/4 TK	5/21/57	1	JMC	LG	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL		ASS'Y. NO.	DATE
1	TER-3500-300	PX-346-1	A-2053	2-9-61
1	TER-3500-70	PX-346-1	A-1471	10-23/57
1	TER-3500	PX-346-2	A-1145	10-23/56

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1/2 x 1/2 BAR			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
STOCK SIZE			TOP SUPPORT, RESISTOR TER-3500	
PHENOLIC NYLON BASE				
MATERIAL				
GRADE N-1			JMC 10/23/56	LG
TYPE & TEMPER	HEAT TREAT. SPEC.		DRAWN	CHECKED
NATURAL				LG
FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.

FINAL APPROVAL: APB

PX-346 B