



REQ. PER UNIT	USED ON			PX912	Ø
	MODEL	ASS'Y. NO.	DATE		
1	RFTA-1		12-10-64		

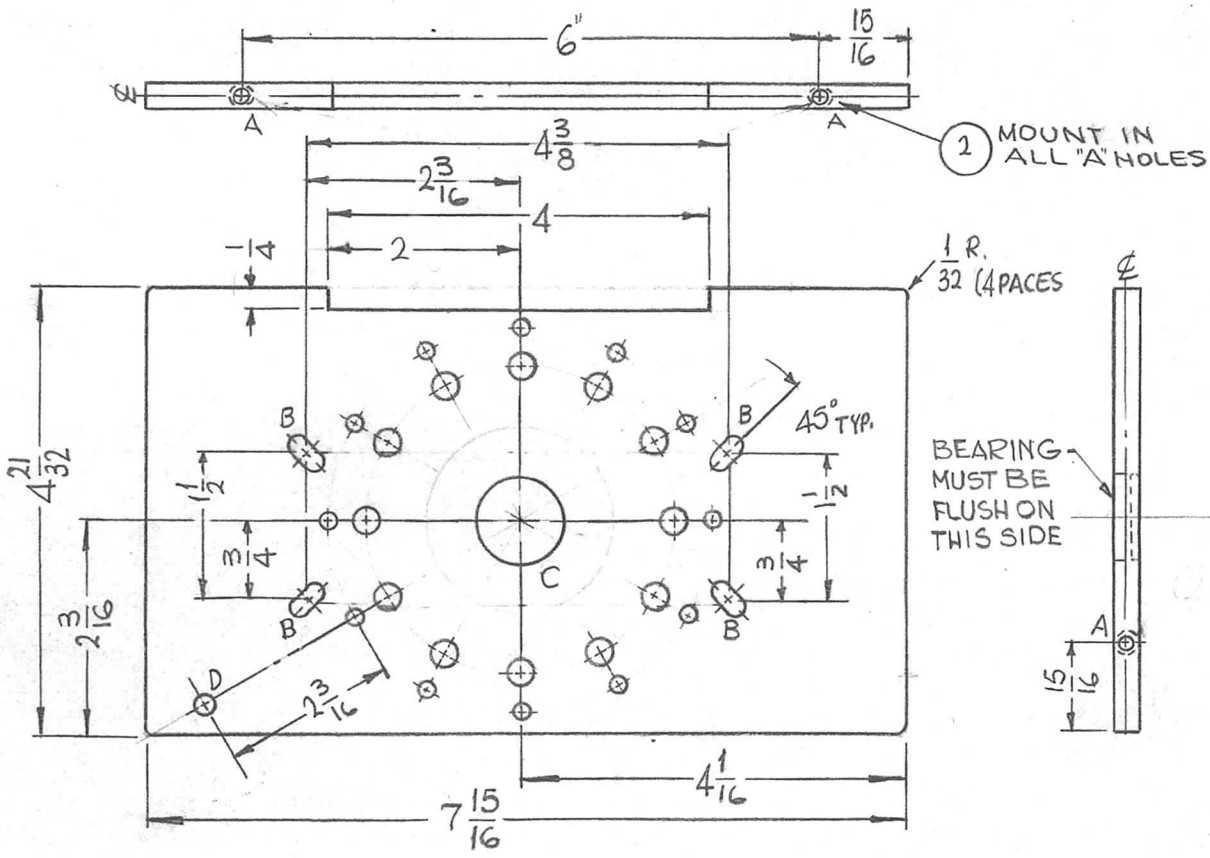

HOLES	DESCRIPTION	REQ.
A	8-32 HELI-COIL (2)	3
B	3/16 X 3/8 SLOTS	4
C	SEE DETAIL	1
D	13/64 DIA.	1

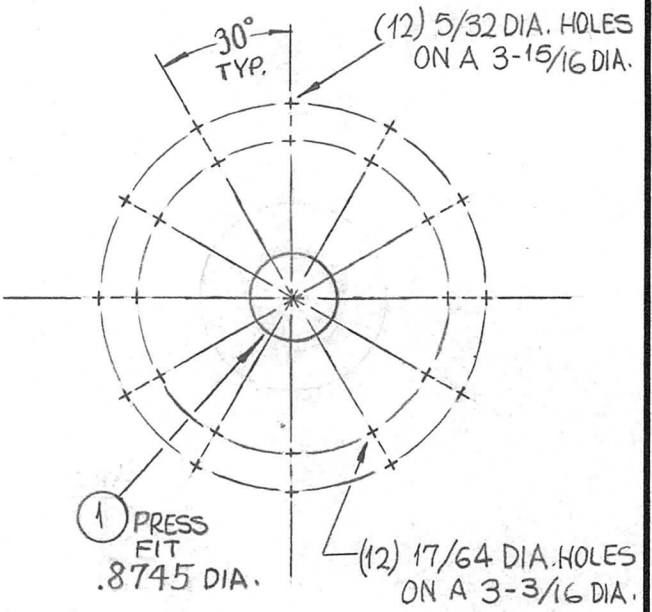

Ø	ORIGINAL RELEASE FOR PRODUCTION	6/13/66	Ø	CV		JL
X3	D HOLE ADDED	7-27-65	X3	SRG		
X2	BEARING NOTE ADDED	6-25-65	X2	G.D.L	DA	
X1	CUTOUT ADDED	3-22-65	X1	SRG		
X	EXP. RELEASE	12-10-64	X	SRG		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1/2:1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A			

3	2	NT139SC0825	8-32 x 7/16 HELICOIL	A	
1	1	BB120-2	BEARING, RACE	C	
REQ. ITEM	PART NO.		F. BUDETTI	DESCRIPTION	SYMBOL
3/8 THICK			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
STOCK SIZE			WAFER, SWITCH PI SECTION		
SUPRA-MICA			MATERIAL		
500			SRG	QC	DB
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
NONE			AA	AK	PX912 Ø
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		