
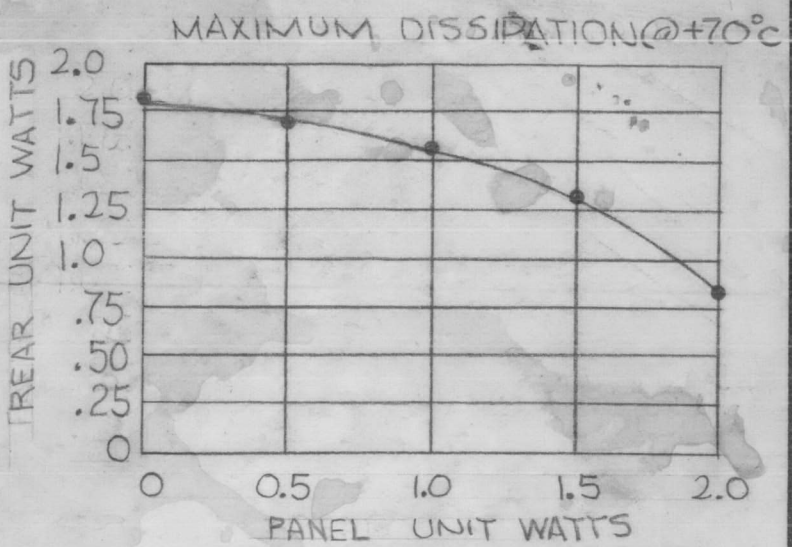


REQ. PER UNIT	USED ON			RV-108	C
	MODEL	ASS'Y. NO.	DATE		
1	GPT-40K	AX-213	4-7-60		

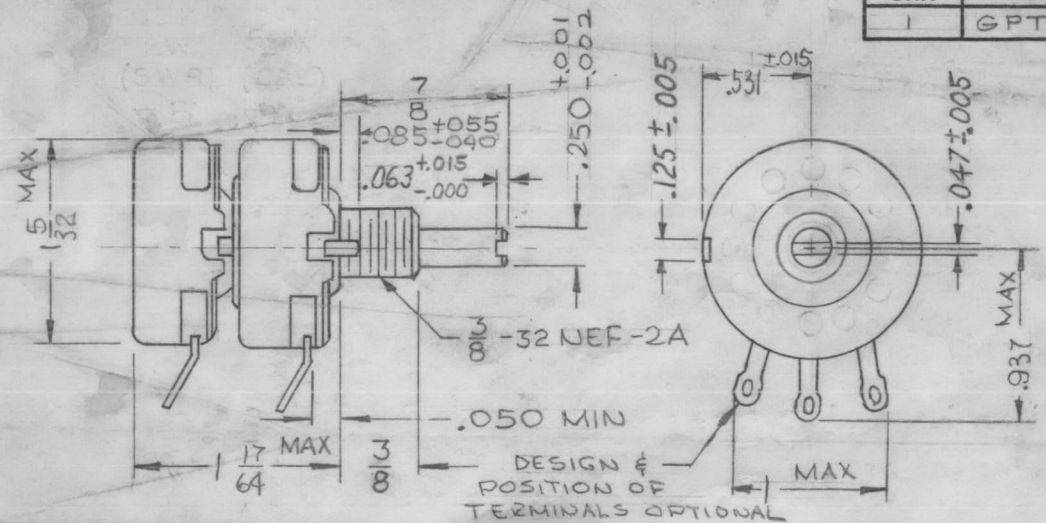

TMC PART NO.	PANEL SECTION	REAR SECTION
RV108	50KΩ LINEAR	12.5KΩ LINEAR
RV108-2	1KΩ LOG	10KΩ LINEAR

HARDWARE SUPPLIED:
 (1) HEX NUT 1/2 X 3/32
 (1) 1/2 DIA. INT TOOTH LOCKWASHER
 BRASS, NICKEL PLATED

SPECIFICATIONS
 TOLERANCE: ±10%
 MAX. AMB. TEMP.: +120°C
 MATERIALS: PER MIL-R-94 (RV4)
 ROTATION: 309°-320°
 TORQUE: 1 TO 12 INCH OUNCES
 STOP TORQUE: 8 INCH LBS
 BACKLASH: 3° MAX
 DIELECTRIC STRENGTH: 500 VRMS

FOR PURCHASING ONLY:
 S401-224 (JJ)
 S401-106 (D53M)
 S401-61 (12)

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
C		ADDED CHART ROTATION WAS 312° ± 3°, ADDED SLOT	3-29-67	18053	L.A.K.	<i>[Signature]</i>					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK RESISTOR, VARIABLE DUAL COMPOSITION, 2 WATT	C	
B		CHG'D PANEL TO REAR REAR TO PANEL	7-26-64	16632	RME	<i>[Signature]</i>							
A		DRAWING REVISED	4-15-66	16090	WHW	<i>[Signature]</i>							
TOLERANCES		SCALE:											
DEC. DIM. ±		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES											
FRAC. DIM. ±													
ANGULAR DIM. ±													
		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL			
		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		RV-108					C