


REQ. PER UNIT	USED ON		TT-110	A
	MODEL	ASSY. NO.		
1	CLL-1		9-9-60	

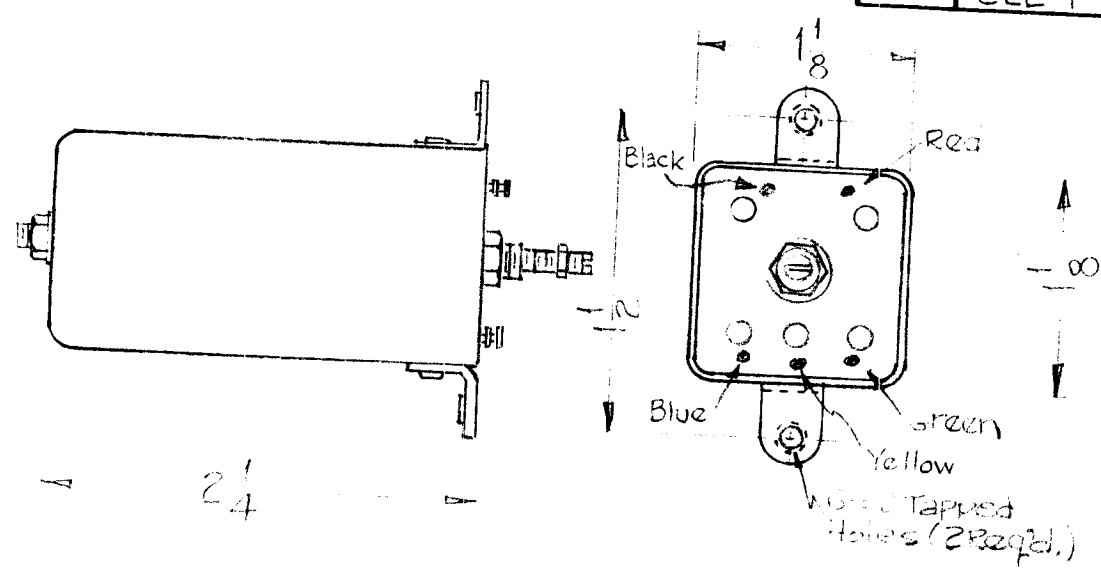


ELECTRICAL SPECIFICATIONS

INDUCTANCE -  
 PRIMARY - 126 uhy ± 4 uhy.  
 C (PRI) 40 or Greater at 790 kc.

TEST FREQ. - 790 kc.

OPERATING FREQ. - 510 to 599 kc.

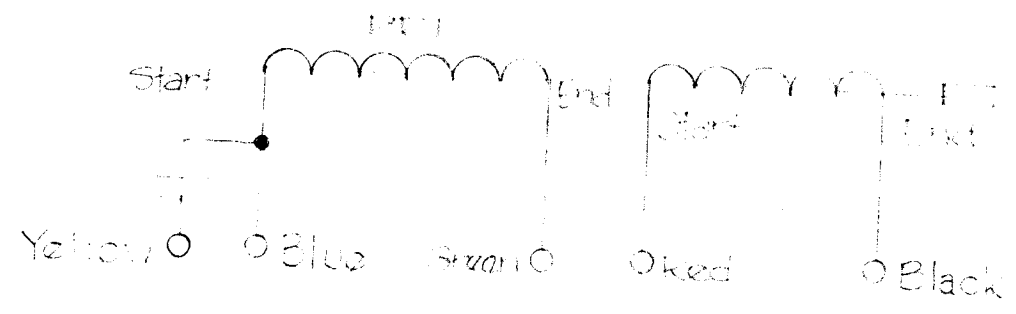

				REQ.	ITEM	PART NO.		DESCRIPTION		SYMBOL	
				STOCK SIZE				THE TECHNICAL MATERIEL CORP.			
				MATERIAL				MAMARONECK, NEW YORK			
				TYPE & TEMPER				TRANSFORMER, R.F. TUNED			
				HEAT TREAT. SPEC.				DRAWN		CHECKED	
				FINISH & SPEC. NO.				ELEC. DES. APP		MECH. DES. APP	
TOLERANCES DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±				SCALE: NFL 2A-1905 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		DATE: 10-26-60 CH. NO.: 3303 DRAFTS: J.C.B. CHECKER: [Signature] ENG. APP.: [Signature]		DRAWN: [Signature] CHECKED: [Signature]		FINAL APPROVAL: [Signature]	
ISSUE ITEM A 3 Black Dot was Blue 2 Blue Dot was Yellow 1 Yellow Dot was Black CHANGED FROM										TT-110	A