



**ELECTRICAL SPECIFICATIONS**

L - 25.5 (23.5 - 27.5)  
 Q - 40 or greater  
 FREQ. (Test) - 2.5 Mcs.  
 OPER. FREQ. - 2 - 4 Mcs.

**MECHANICAL SPECIFICATIONS**

TOTAL TURNS - 42  
 TAP - 16  
 WIRE - WI-104-541 DSQS  
 TURNING SLUG - Powdered Iron  
 FORM - Phenolic

REQ. PER UNIT	USED ON			TT-138	A
	MODEL	ASS'Y. NO.	DATE		
1	GPE-1		7-6-61		

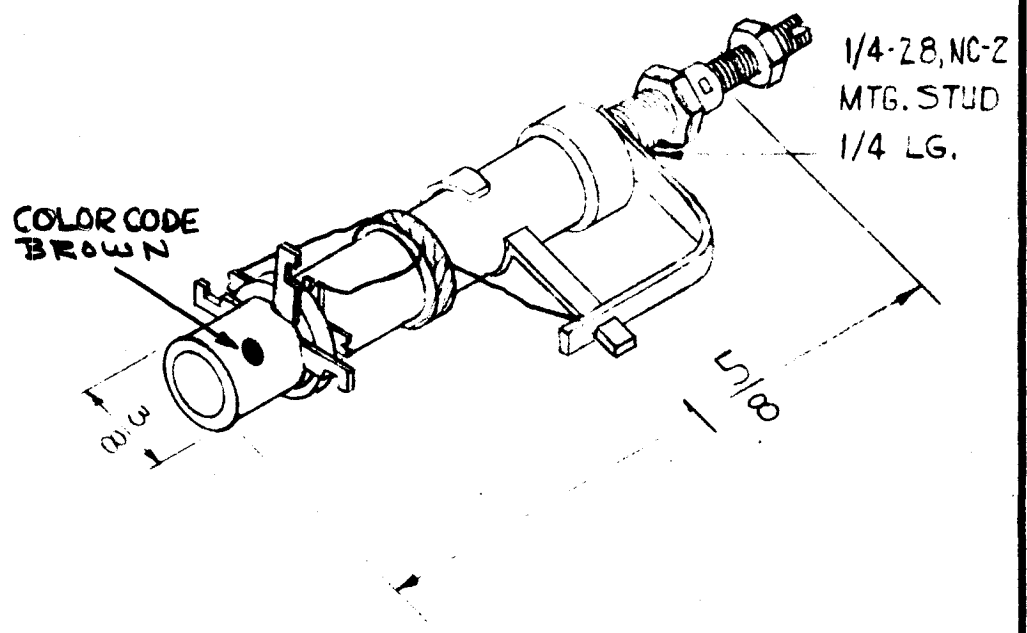

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL			
TOLERANCES DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±								SCALE: 2A-2100 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TRANSFORMER, RF, TUNED					
A T ON ELECT. SPECS. Q WAS 60 B-30-B1 5520 E.A. GRS								MATERIAL		R UZZO		CHECKED		FINAL APPROVAL	
TYPE & TEMPER HEAT TREAT. SPEC.								FINISH & SPEC. NO.		ELEC. DES. APP. MECH. DES. APP.		TT-138 A			