


DECIMALS XXX ± .002 XX ± .01 X ± .02 TOLERANCES	FRACTIONS ± 0° 30' ± 1/64" ANGLES	CODE Δ	2A-3822	TYPE & TEMPER HEAT TREAT. SPEC.	DRAWN H. Austin	CHECKED DOK	FINAL APPROVAL [Signature]	CHEMICALLY APPLIED OR PLATED FINISHES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE SCALE	DESCRIPTION	DATE 2-19-52	CH. NO. 44A	DRAFTS 44A	CHECKER [Signature]	ENG. APP. [Signature]	SYM	Φ ORIGINAL RELEASE FOR PRODUCTION	STOCK SIZE	DESCRIPTION	SYMBOL
																		TRANSFORMER, TC, ADJUSTABLE	PO2E
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK																			
PART NO.																			
REQ. ITEM																			

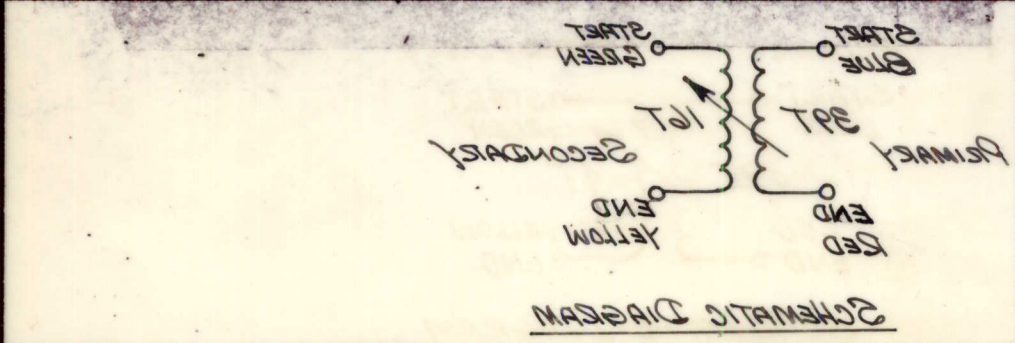

CORE & SLUG: POWDERED IRON

MATERIAL:

Retainers, TOP: NICKEL SILVER H/H  
Retainers, BOTTOM: BRASS CAD PLATED

PRIMARY: 3P  
SECONDARY: 1P

TURNS

MECHANICAL SPEC.

"0" (PRIMARY) @ 100 KCS: > 500  
SECONDARY: NOT RATED  
PRIMARY: 250μ + 5 - 5μ  
INDUCTANCE @ 700 KCS  
OPERATING FREQUENCY:  
(WITH SLUG INSERTED)  
ELECTRICAL SPECS.

USED ON	MODEL	ASSY. NO.	DATE
	LEA-1	A3718	2-19-52
REQ. PER UNIT	2		

TT221

