
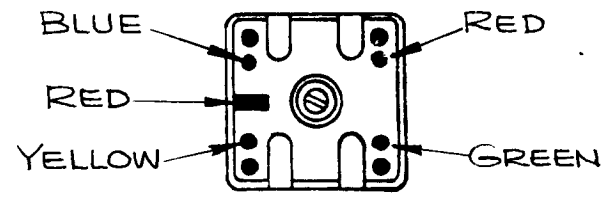



REQ. PER UNIT	USED ON			TT233	✓
	MODEL	ASS'Y. NO.	DATE		
1	LFSB-1	A 3791	3-15-65		




ELECTRICAL SPECS.  
(WITH SLUG INSERTED)

OPERATING FREQUENCY:  
INDUCTANCE @ 7.9 MC  
PRIMARY:  $8.4 \mu h \pm .2 \mu h$   
SECONDARY: NOT RATED  
"Q" (PRIMARY) @ 5.25 MCS :  $> 105$

MECHANICAL SPEC.

TURNS  
PRIMARY: 28  
SECONDARY: 9  
COLOR CODE: RED  
CASE: COPPER CAN  
CASE FINISH: TIN-PLATED  
QUANTITY TERM: -4  
MATERIAL:  
CORE & SLUG: POWDERED IRON

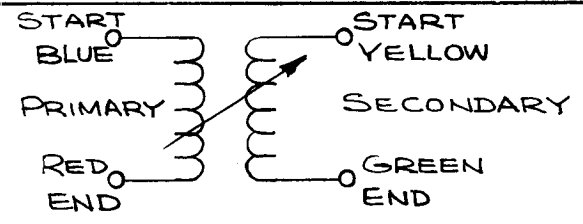

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL		
Ø	ORIGINAL RELEASE FOR PRODUCTION	5-4-65	Ø							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK.	TRANSFORMER, RF, ADJUSTABLE		
X	EXPER. RELEASE	3-15-65	X	HLA									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE						
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A-3941	H. AUSTIN	3-29-65	K. M. King 5/1/65
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	TT233	Ø	