
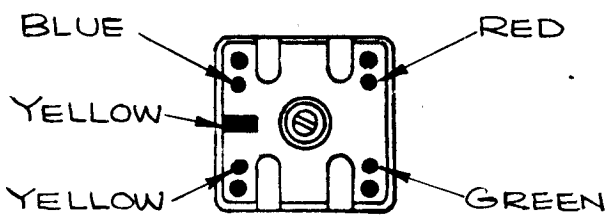



REQ. PER UNIT	USED ON			TT236 Ø
	MODEL	ASS'Y. NO.	DATE	
1	LFSB-1	A3791	3-15-65	




ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: $2.1 \mu h \pm .1 \mu h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 10 MCS: > 100

MECHANICAL SPEC.

URNS
PRIMARY: 15
SECONDARY: 4
COLOR CODE: YELLOW
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON

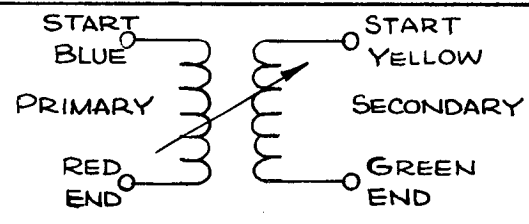

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/15/65					—A—		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	TRANSFORMER, RF, ADJUSTABLE	
X	EXPER. RELEASE		X	HLA	gll		—A—				
							—A—				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	2-A-3944			—A—	—A—	H. AUSTIN	3-27-65	[Signature]
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	TT236	Ø