

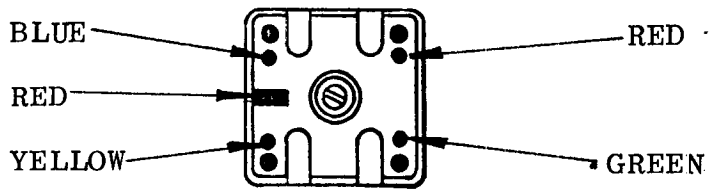



REQ. PER UNIT	USED ON			TT242	Ø
	MODEL	ASS'Y. NO.	DATE		
4	LFSB-1	A3788			



ELECTRICAL SPECS.
(WITH SLUG INSERTED)
OPERATING FREQUENCY:
INDUCTANCE @ 7.9MC
PRIMARY: 3.5μh ± .1 μh
SECONDARY: NOT RATED
"Q" (PRIMARY) 9.0 MC:110MIN.

MECHANICAL SPEC.
TURNS:
PRIMARY: 17
SECONDARY: 1
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

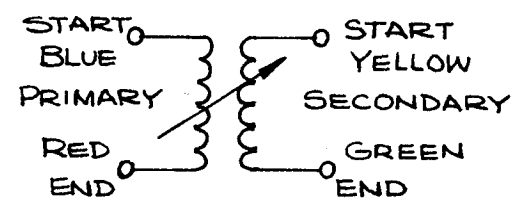

SCHEMATIC DIAGRAM

							REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø ORIGINAL RELEASE FOR PRODUCTION							4-7-65	Ø	HLA	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X EXPER. RELEASE							3-16-65	X	HLA	TRANSFORMER, RF, ADJUSTABLE	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE		H. AUSTIN 3-24-65		
DECIMALS X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	FINAL APPROVAL	
TOLERANCES							A	2-A-3950	TT242		Ø
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	ELEC. DES. APP.
							FINISH & SPEC. NO.		MECH. DES. APP.		