
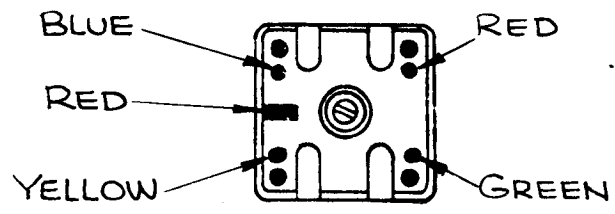



REQ. PER UNIT	USED ON			TT 245	Ø
	MODEL	ASS'Y. NO.	DATE		
2	LFSB-1	A 3790	3-15-65		




**ELECTRICAL SPECS.
(WITH SLUG INSERTED)**

OPERATING FREQUENCY:
 INDUCTANCE @ 7.9 MC
 PRIMARY: $9.7 \mu h \pm .5 \mu h$
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 6.5 MC: 105 MIN.

MECHANICAL SPEC.

URNS
 PRIMARY: 30
 SECONDARY: 30
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

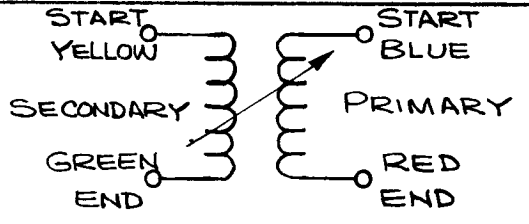

SCHMATIC DIAGRAM

REQ. UNIT	ITEM	PART NO.	DESCRIPTION	SYMBOL									
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.1.65	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK										
X	EXPER. RELEASE	3-15-65	TRANSFORMER, RF, ADJUSTABLE										
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		H. AUSTIN		3-29-65							
DECIMALS X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A-3954						DRB		TT 245	Ø
				FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.					