
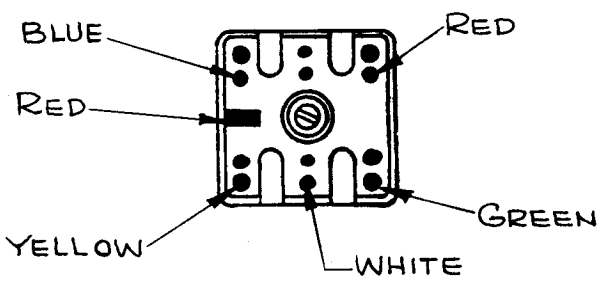



REQ. PER. UNIT	USED ON			TT246	Ø
	MODEL	ASS'Y. NO.	DATE		
2	LFSB-1	A.3790	3-24-65		




**ELECTRICAL SPECS.**  
(WITH SLUG INSERTED)

OPERATING FREQUENCY:  
 INDUCTANCE @ 7.9 MC  
 PRIMARY:  $4.1 \mu h \pm .5 \mu h$   
 SECONDARY: NOT RATED  
 "Q" (PRIMARY) @ 6.5 MC: 35 MIN.

**MECHANICAL SPEC.**

URNS  
 PRIMARY: 20  
 SECONDARY: 20 BIFILAR  
 COLOR CODE: RED  
 CASE: COPPER CAN  
 CASE FINISH: TIN-PLATED  
 QUANTITY TERM: 6  
 MATERIAL:  
 CORE & SLUG: POWDERED IRON

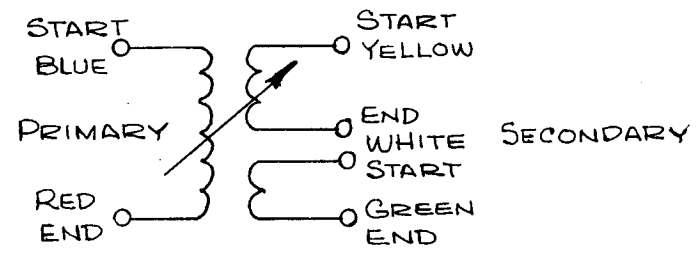

SCHEMATIC DIAGRAM

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
Ø		—	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK				
		—	TRANSFORMER, RF, ADJUSTABLE				
		—					
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.7.65	Ø	HLA			
X	EXPER. RELEASE	3.24.65	X	HLA			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A-3955			
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN H. AUSTIN	CHECKED 3.29.65	FINAL APPROVAL Ø	
		FINISH & SPEC. NO.		ELEC. DES. APP. Ø	MECH. DES. APP.	TT246 Ø	