

| | | | | | |
|---------------|---------|-----------|---------|-------|---|
| REQ. PER UNIT | USED ON | | | TT259 | B |
| | MODEL | ASSY. NO. | DATE | | |
| 4 | CMRA-1 | A4220 | 5-11-65 | | |

ELECTRICAL SPECS.
(w/o SLUG)


OPERATING FREQUENCY:
INDUCTANCE @ 2.5 Mc
PRIMARY: 20 μ h \pm 1.0 μ h
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 2.5 Mc MIN 15

MECHANICAL SPEC.

URNS

PRIMARY: 25
SECONDARY: 25

COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 6
MATERIAL:
CORE & SLUG: POWDERED IRON

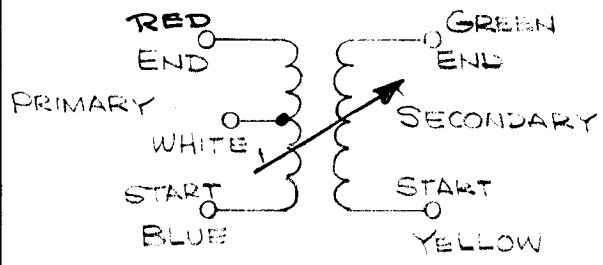

SCHEMATIC DIAGRAM

| | | | | | | | | | | |
|---|--|---|-----------|--------|---------|--------------------|-------------------|--|----------------------|----------------|
| B | RELOC. TT259 | 12-7-66 | 17373 | RME | QA | REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL | |
| A | PRI. IND WAS 15.5 μ h \pm 0.8 μ h PRI "Q" MIN. FR. WAS 20 | 7-19-66 | 16575 | RME | QA | | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | |
| 0 | RELEASER RELEASE FOR PRODUCTION | 5-4-65 | X | QJL | | | | | TRANSFORMER RF, ADJ. | |
| X | EXPER. RELEASE | 5-11-65 | X | QLA | | | | IF-T4 | | |
| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | MATERIAL | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE | | | | | | | | |
| DECIMALS X \pm .05 XX \pm .01 XXX \pm .005 | TOLERANCES | FRACTIONS \pm 1/64 ANGLES \pm 0° 30' | CODE A | 2A4272 | | | | | | |
| | | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL |
| | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | TT259 B |