


REQ. PER UNIT	USED ON			TT260	C
	MODEL	ASSY. NO.	DATE		
4	CMRA-1	A4220	5-11-65		

ELECTRICAL SPECS.
(w/o SLUG)

OPERATING FREQUENCY:
 INDUCTANCE @ 1.75 MC
 PRIMARY: $9.5 \mu h \pm 1.0 \mu h$
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 1.75 MC MIN 15

MECHANICAL SPEC.

URNS
 PRIMARY: 70
 SECONDARY: 35
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

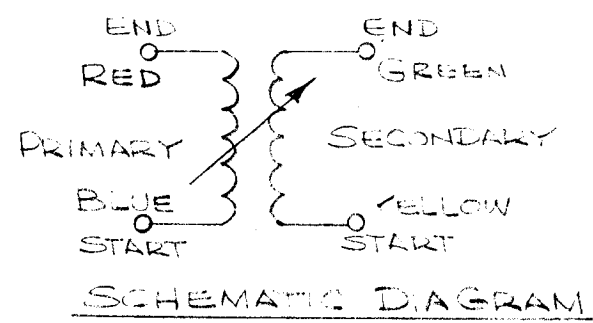

C	TT260 RELOC	12.20.65	17586	WLD	QPS	QPS
B	"Q" MIN. WAS 20	82366	16575	RME	LB	MB
A	PR. IND. TOL WAS $\pm 0.5 \mu h$	7/7/66	16575	RME	QPS	QPS
Ø	ORIGINAL RELEASE FOR PRODUCTION	5-12-65	X	CJL		
X	EXPER. RELEASE	5-11-65	X	HLA		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2A4273		

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
—	—	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
—	—	TRANSFORMER, RF, ADJ.	
—	—	IF-T5	
—	—	DRAWN	5/13/66
—	—	CHECKED	3/4/66
—	—	FINAL APPROVAL	
—	—	ELEC. DES. APP.	
—	—	MECH. DES. APP.	
—	—	TT260	C