


REQ. PER UNIT	USED ON			TT266	A
	MODEL	ASSY. NO.	DATE		
1	CMRA-1	A4218	5-13-65		

**ELECTRICAL SPECS.
(W/O SLUG)**

OPERATING FREQUENCY:
 INDUCTANCE @ 1.75 MHz
 PRIMARY: 10 μ h \pm 1.0%
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 1.75 MC Min. 40

MECHANICAL SPEC.

TURNS
 PRIMARY: 35
 SECONDARY: 15
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 6
 MATERIAL:
 CORE & SLUG: POWDERED IRON

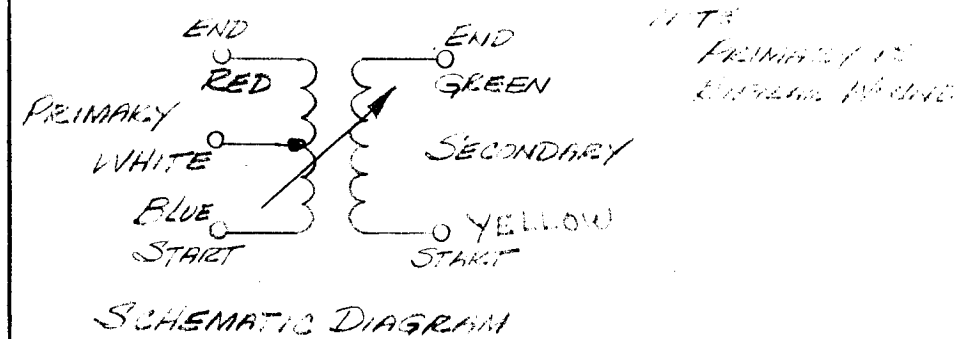

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL
		—A—	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
		STOCK SIZE	TRANSFORMER, RF, ADJ.				
		—A—	SYN-B-T2				
		MATERIAL					
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
		FINISH & SPEC. NO.					
						TT266 A	