



Transmitter Control Terminal

Model TCS-12


Product Brief 110415B

- Multiple Transmitter Control
- Integrated Solid State
- Full-Function Monitoring
- Modular Construction
- Modem or Hardwire Remote
- Programmable 99 Channels

The TCS-12 remote control terminal is a complete microprocessor-based digital control system. Primarily used in transmitting stations that process high-volume multi-channel voice, teletype and data traffic, the TCS-12 features rapid selection of synthesized frequencies, operating modes and power output levels. Control of up to 99 co-located transmitters is shared at the operations center, thereby eliminating the need for dedicated facilities or duplicate equipment. Readback and display of functions, including frequency, operating mode, carrier suppression level, power output level, high voltage ON/OFF, TUNE/READY indications and real-time FAULT alarms are standard features.

Optional software modules enable an operator to graphically display building plans and transmitter outlines, which are then overlaid with the actual status of the facilities monitored. Remote measurement and test of selected transmitters is also available along with a full range of modules that customize reports, record or modify the site operating procedures, and create the circuit layout records for use in a map of the complete network topology. Since the system is microcomputer-based, standard software can be added in.

Model TCS-12
(Tabletop configuration)

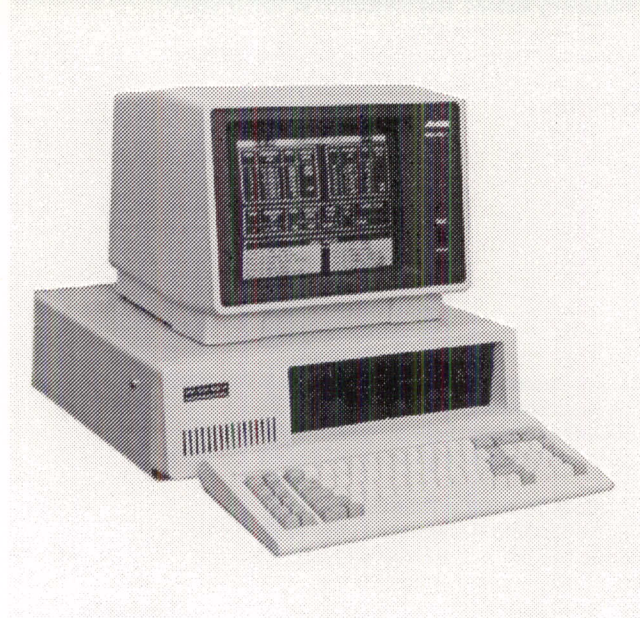

The TCS-12 enables programming of up to 99 synthesized channels for each transmitter. Digital information is captured and stored in non-volatile memory under a channel number assigned by the operator. When a channel is selected, complete operating data is retrieved from memory, reducing the chance of error in transmitter setup.

The TCS-12 can be used with any synthesized TMC transmitter in the GPT, MFT and LFT series. It uses full-duplex, asynchronous serial transmission for both control and readback signalling. ASCII (American Standard Code for Information Interchange) is the data format set at the factory, although other formats are available to match the site's host computer system. Each remote transmitter is assigned a unique two-digit address which is set by a thumbwheel switch located behind the front panel of the exciter. An alternate method allows an address change from the TCS-12 which can override the switch setting.

The TCS-12 uses totally solid state components to assure dependable performance over a long service life. The modular construction of the unit with its plug-in circuit cards, simplifies servicing and provides complete access by the technician from the front panel. A removeable wrap-around chassis allows access to internal circuits while providing additional RF shielding. Normally, the terminal is configured for mounting in a standard 19-inch equipment rack or console. It is cooled by a single fan since the solid state components used generate relatively little heat.

The software modules are installed at the factory when the equipment is delivered. However, updates to the modules are recorded to floppy diskettes and sent into the field for installation by site engineers. Based on the configuration, hardware and software changes are easily applied given the modular design of the TCS-12.

DIGITAL SPECIFICATIONS

Data Format Asynchronous serial ASCII
Signalling Full-duplex EIA RS-232C serial.
Auxiliary serial port on all units for printer/display.
Data Rate 1200 baud pre-set at factory.
Optional: Others to 9600bps on request.

COMMAND FUNCTIONS

Frequency Select Any frequency in 100Hz steps.
Optional: 10Hz steps

Frequency Range Standard 2.0 to 29.9999MHz
Optional: 10.0KHz to 29.9999MHz

Mode Select

NON	Absence of any modulation
A1A	Continuous wave (CW) telegraphy
A2A	Modulated CW telegraphy
A3E	Amplitude modulated (AM) telephony
H3E	Compatible AM telephony (AME)
R3E	Single sideband, reduced carrier
J3E	Single sideband, suppressed carrier
B8E	Two independent sidebands
F1B	Frequency shift keying (FSK)
F1C	Facsimile (FAX)

Carrier Select Reinsertion selectable in four steps:
Full suppression/-30dB/-20dB/-6dB

RF Output Power Four programmable levels

Standby/Operate High voltage ON/OFF controlled

READBACK INDICATIONS

Control Function Displayed after verification

Status Function Continuous readback of status with display of all indications. Fault activates audible alarm. Transmitter BITE read-out optional.

OPTIONAL FEATURES

Graphics Overlaying windows for display of floor plans, transmitter frames, etc.

Database Automatic collection and structuring of data with customized reporting of all activities.

Multi-User Enhanced capability allows several users to access transmitters remotely.

Networking Compatible with Local Area Networks when multiple computers require access.

MECHANICAL and ENVIRONMENTAL

Primary Power 115/230VAC, 50/60Hz, 210 watts

Operating 0°C to +55°C, 90% R.H.

Storage -30°C to +75°C; 90% R.H.

Cooling Internal muffin fan

Size and Weight 5.25H x 19W x 15D inches, 24 lbs.

13.3H x 48.3W x 38.1D cm, 10.9Kg. (less monitor)

Construction Modular, totally solid state

ORDERING INFORMATION and OPTIONS

TCS-12 Transmitter Control Terminal

Options:


/Dx	Distribution Frame, x-channel (x=10....100)
/M12	Internal asynchronous 1200-baud modem
/M24	Internal asynchronous 2400-baud modem

Operating Software Modules:

TMS-100	Network Management
TMS-200	Command and Control
TMS-300	Security Monitoring
TMS-400	Site Management
TMS-500	BITE Maintenance

Specifications are subject to change without notice - Please verify with TMC before ordering

TYPICAL INSTALLATION

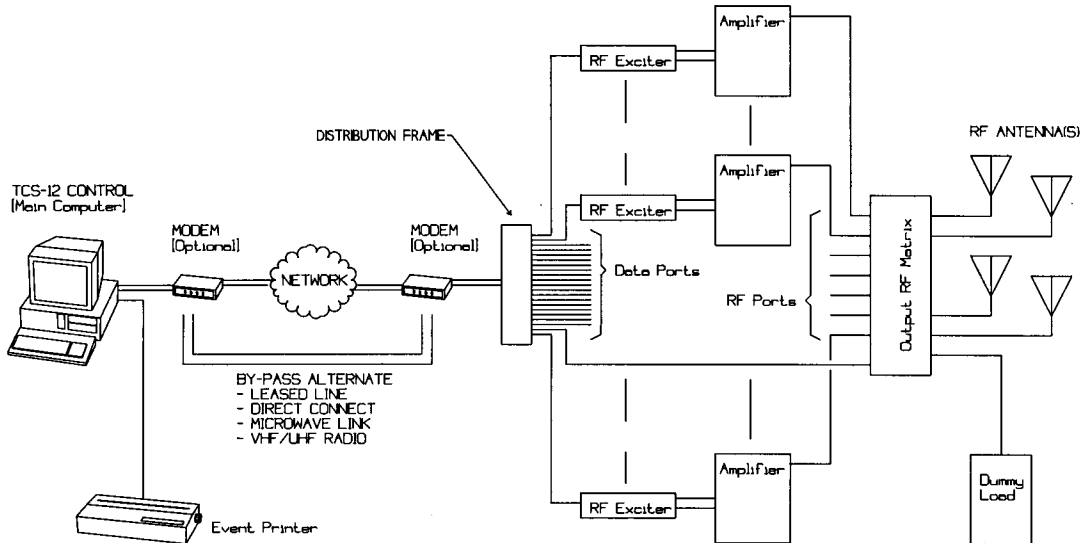

The Technical Materiel Corporation

Computer Products Division

700 Fenimore Road

Mamaroneck, New York 10543-2300 USA

Phone: (914) 698-4800

(800) TMC-1224

Fax: (914) 698-4805