

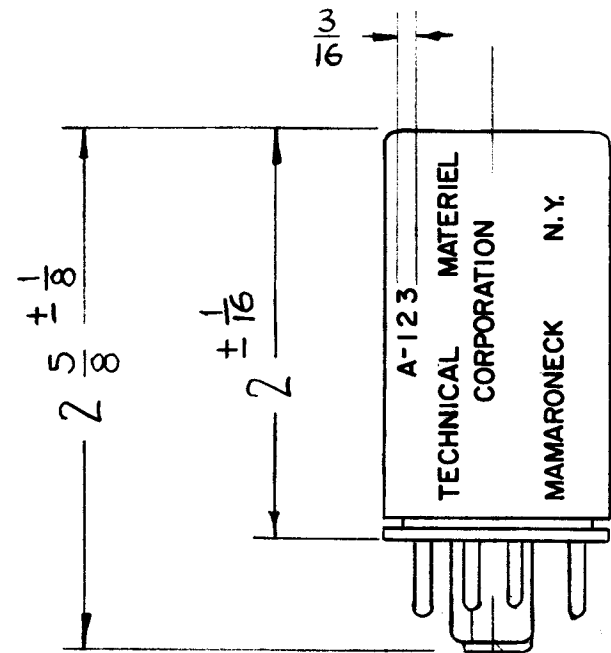


A-123 G

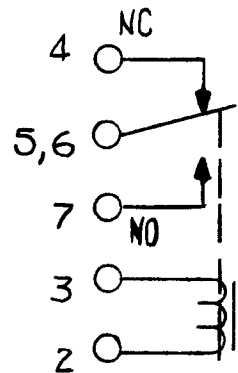

STAMP AS SHOWN
1/8 HIGH BLACK GOTHIC
UNLESS OTHERWISE
SPECIFIED.

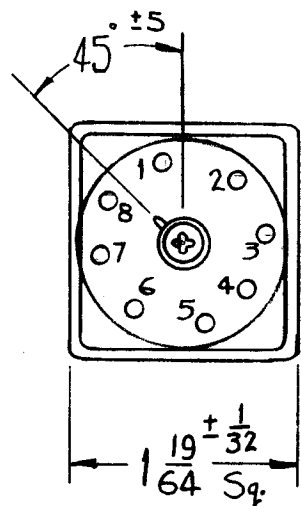

— SCHEMATIC —

SPECS:

1. CONTACT DATA
 - A. FORM 1C
 - B. TYPE - SILVER
 - C. RATINGS
 - (1) AC, DC
 - (2) 5 AMPS AT 28 VDC
5 AMPS AT 115 VAC
 - (3) NOT RATED FOR MAX. VOLT. OR CURRENT
2. COIL DATA
 - A. ONE INDUCTIVE WINDING
 - B. OPERATING VOLTAGES
 - (1) 115 V, ± 15%, 50/60 CPS
 - (2) 230 V, ± 15%, 50/60 CPS WHEN USED WITH EXTERNAL 4550 OHS, ± 5% RESISTOR IN SERIES.
 - C. COIL NOT POLARIZED
 - D. COIL DC RES. AT 68° F = 5000Ω ± 10%
 - E. MUST OPERATE VOLTAGE - 90 VAC
3. TERMINAL DATA
 - A. STANDARD OCTAL BASE (8 PINS)
 - B. PINS CONNECTED AS SHOWN IN SCHEMATIC
 - C. NO CONNECTION ON PINS 1 & 8
4. CASE DATA
 - A. SEMI - PERMANENT ALUMINUM
 - B. CLEAR ANODIZE FINISH
5. MARKING:
 1. STAMP TMC P/N AND NAME AS SHOWN.
 2. STAMP SCHEMATIC (LOCATION AND CONFIG. OPTIONAL).

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
G	EXTENDED 2" DIM., ADDED S401 CODE, ADDED "E" TO SPECS 2, ADDED SPEC 5 MARKING	7-21-66	16600	RME	JCB	MM
F	ON PICTORIAL SPELLING "TECHNICAL" REVISED	7-11-61	5220	G.O.L.	JCB	LS
E	Revised & Redrawn	6-2-61	4990	RD	JCB	LS

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°
SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

FOR PURCHASING ONLY

S401-132 { 41R0Z-94978
41R0Z.5000 ACGBSL

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	PMO-4,5,6			6-2-61
	RTF-2/1C			6-2-61
	VOX-5,6			6-2-61

USED ON

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		RELAY, ARMATURE OCTAL PLUG-IN TYPE	
		MATERIAL	
		TYPE & TEMPER	
		HEAT TREAT. SPEC.	
		DRAWN	
		CHECKER	
		FINAL APPROVAL	
		FINISH & SPEC. NO.	
		ELEC. DES. APP.	
		MECH. DES. APP.	

A-123 G