


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

LEADS TO BE 6", CUT SLEEVING AND LEADS TO CORRECT LENGTH ON ASSEMBLY IN CHASSIS.

A-1027

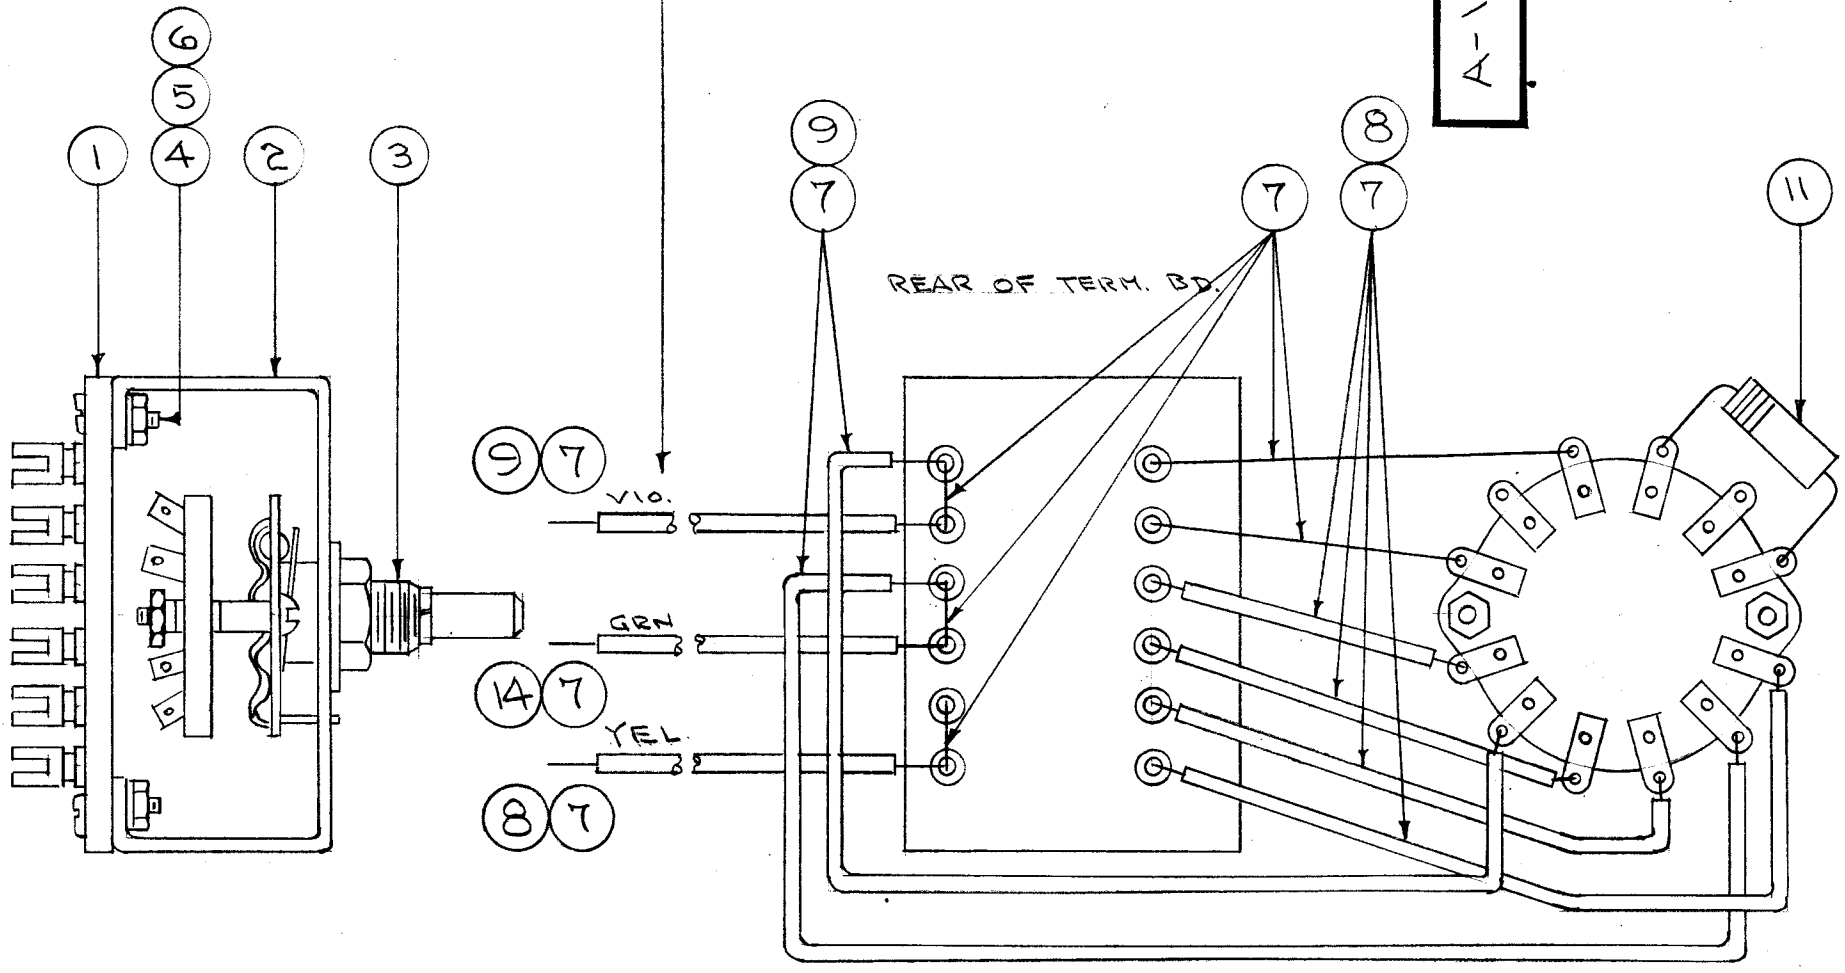

WIRING DETAIL - ONLY TO SHOW CONNECTIONS. KEEP LEADS AS SHORT AS POSSIBLE

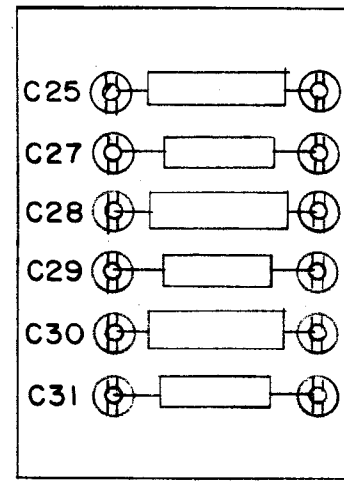

X	14	PX-10A-4-.022	INSULATION, SLEEVING GRN	
3	13	CM109D2001J	CAPACITOR, FIXED	C-27-29-31
3	12	CM108D2002J	" " "	C-25-28-30
1	11	RC20GF10AK	RESISTOR, FIXED	R70
X	10	BS-100	SOLDER, SOFT	
X	9	PX-10A-9-.022	INSULATION, SLEEVING VIO.	
X	8	PX-10A-2-.022	" " " YEL.	
X	7	WL-100-7	WIRE, BUSSBAR 22GA.	
2	6	NTH04A0BCG	NUT, HEX	
2	5	LWI04MRC	WASHER, LOCK	
2	4	SBBS04A0BCG	SCREW, MACHINE	
1	3	SW-116	SWITCH, TIME BASE	53
1	2	MS-652	BRACKET	
1	1	A-1026	TERM. BD. ASSY.	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP.			
MAMARONECK. NEW YORK			
TIME BASE SWITCH ASSY.			
STOCK SIZE		FSS	
MATERIAL		WEIGHT PER PC.	
TYPE & TEMPER			
HEAT TREAT. SPEC.		DRAWN	
FINISH & SPEC. NO.		ELEC. DES. APP.	
		MECH. DES. APP.	
		CHECKED	
		FINAL APPROVAL	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES							
SCALE:							
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.							
ALL OTHERS							
DEC. DIM. ±							
FRAC. DIM. ±							
ANGULAR DIM. ±							

1	FSS			6-15-55
REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON				