IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		PROD. RELEASE	JUNE 21'71		J.D.R		
X1		RELOCATION OF WIRES	29 DEC '70		JDR		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	1	A10935-5	PC BD ASSY	
1	2	M511266	BRACKET	
2	3	M510869	SPACER	
A/R	4	PX104-2-022	SLEEVE, INSUL (YEL)	
A/R	5	PX104-3-022	(RED)	
A/R	6	PX104-5-022	(BRW)	
A/R	7	PX104-8-022	SLEEVE, INSUL (ORG)	
2	8		SCREW, MACH (2-56)	
1	9		SCREW, MACH (4-40)	
4	10		WASHER, LOCK (#2)	
1	11		WASHER, FLAT (#4)	
2	12		WASHER, LOCK (#2)	
1	13		WASHER, FIBRE (#4)	
2	14		NUT, HEX (#2)	
1	15		NUT, HEX (#4)	
1	16		LUG SOLDER	

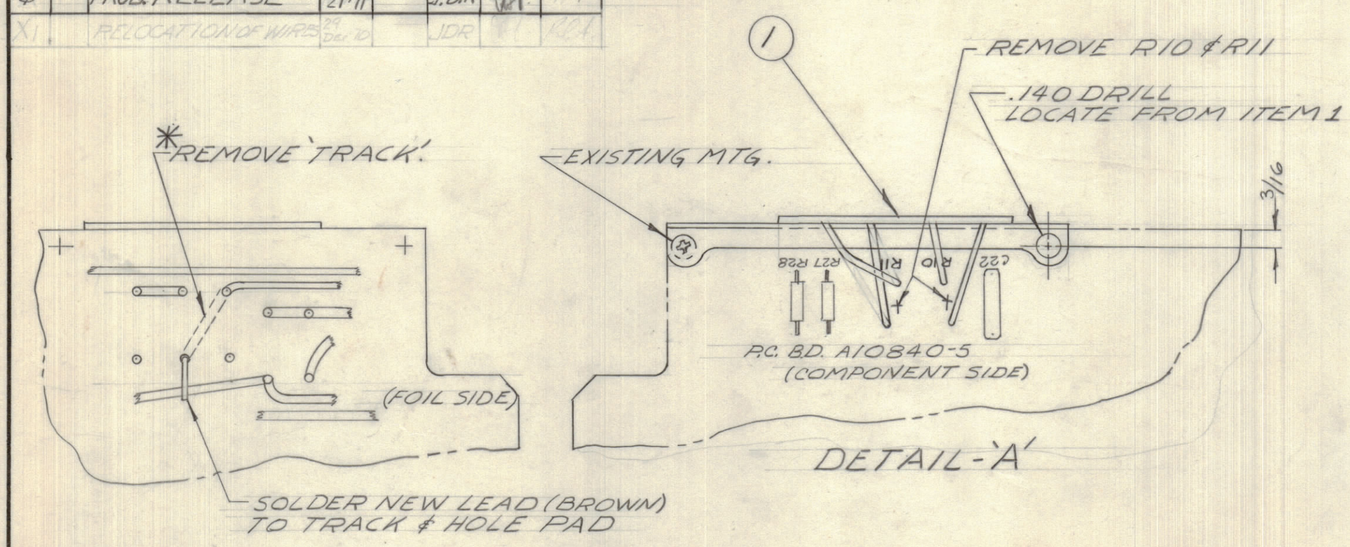

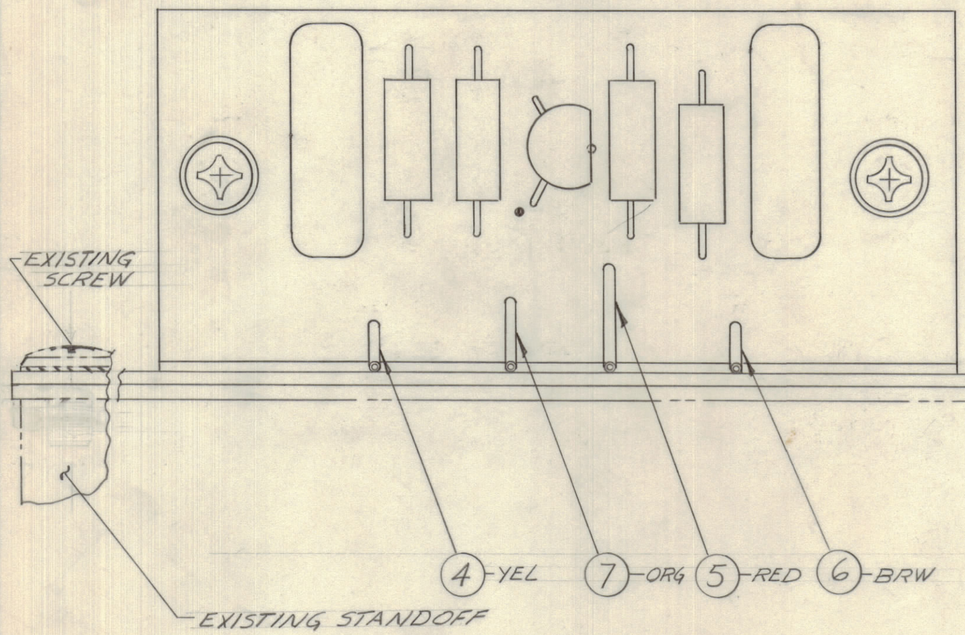

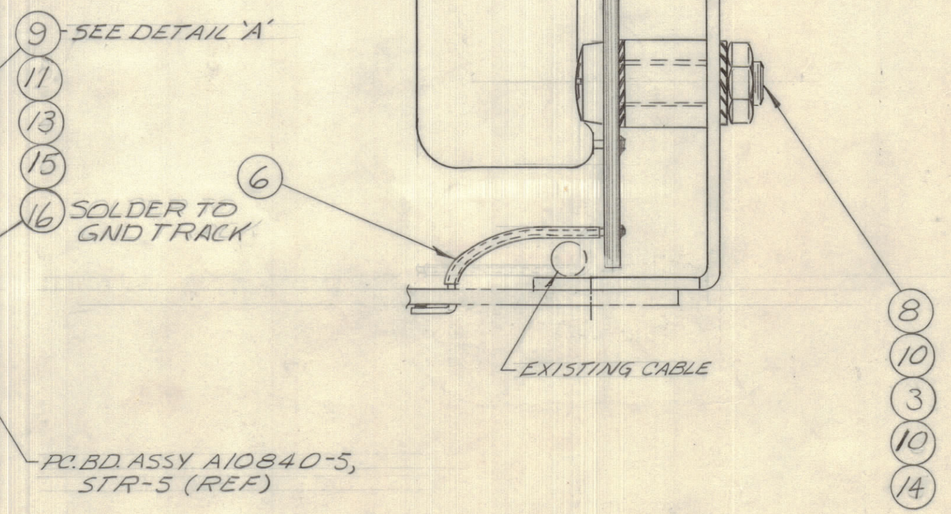

A10936 Ø

INSTALLATION:

1. REMOVE R10 & R11, FROM A10840-5.
2. REMOVE TRACK BETWEEN R10 & R11 *.
3. INSERT WIRES IN HOLES AS SHOWN.
   NOTE: SOLDER WIRE (BROWN) TO TRACK RUNNING BESIDE HOLE, CLIP & SOLDER OTHER WIRES.
4. ATTACH BRACKET TO BOARD.

TEST

REF: KIT 10038
CK 10797

TOLERANCES			SCALE: 4/1
ALL OTHERS	DEC. DIM. ±	.X = .05	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	FRAC. DIM. ± 1/64	.XX = .01	
	ANGULAR DIM. ± 0° 30'	.XXX = .005	

KIT 10038	118/71	KIT 10038	11 Nov '70
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON			

STOCK SIZE

MATERIAL | WEIGHT PER PC.

TYPE & TEMPER

HEAT TREAT. SPEC.

FINISH & SPEC. NO.

TMC (Canada) LIMITED
OTTAWA ONTARIO

BRACKET, ASSY

J. RESCORLA		
DRAWN	ELEC. DES. APP.	MECH. DES. APP.
PROCTOR		
CHECKED	FINAL APPROVAL	

SHT 1 OF 1 | A10936 | Ø

FORM—129