


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
X	1	ENG. RELEASE	28 MAR 72		WAT	LB	
X ₁		SEE SHEET 5	30 MAY 72		C.C.	LB	
X ₂		SEE SHEET 5	8 AUG 72		C.C.	LB	

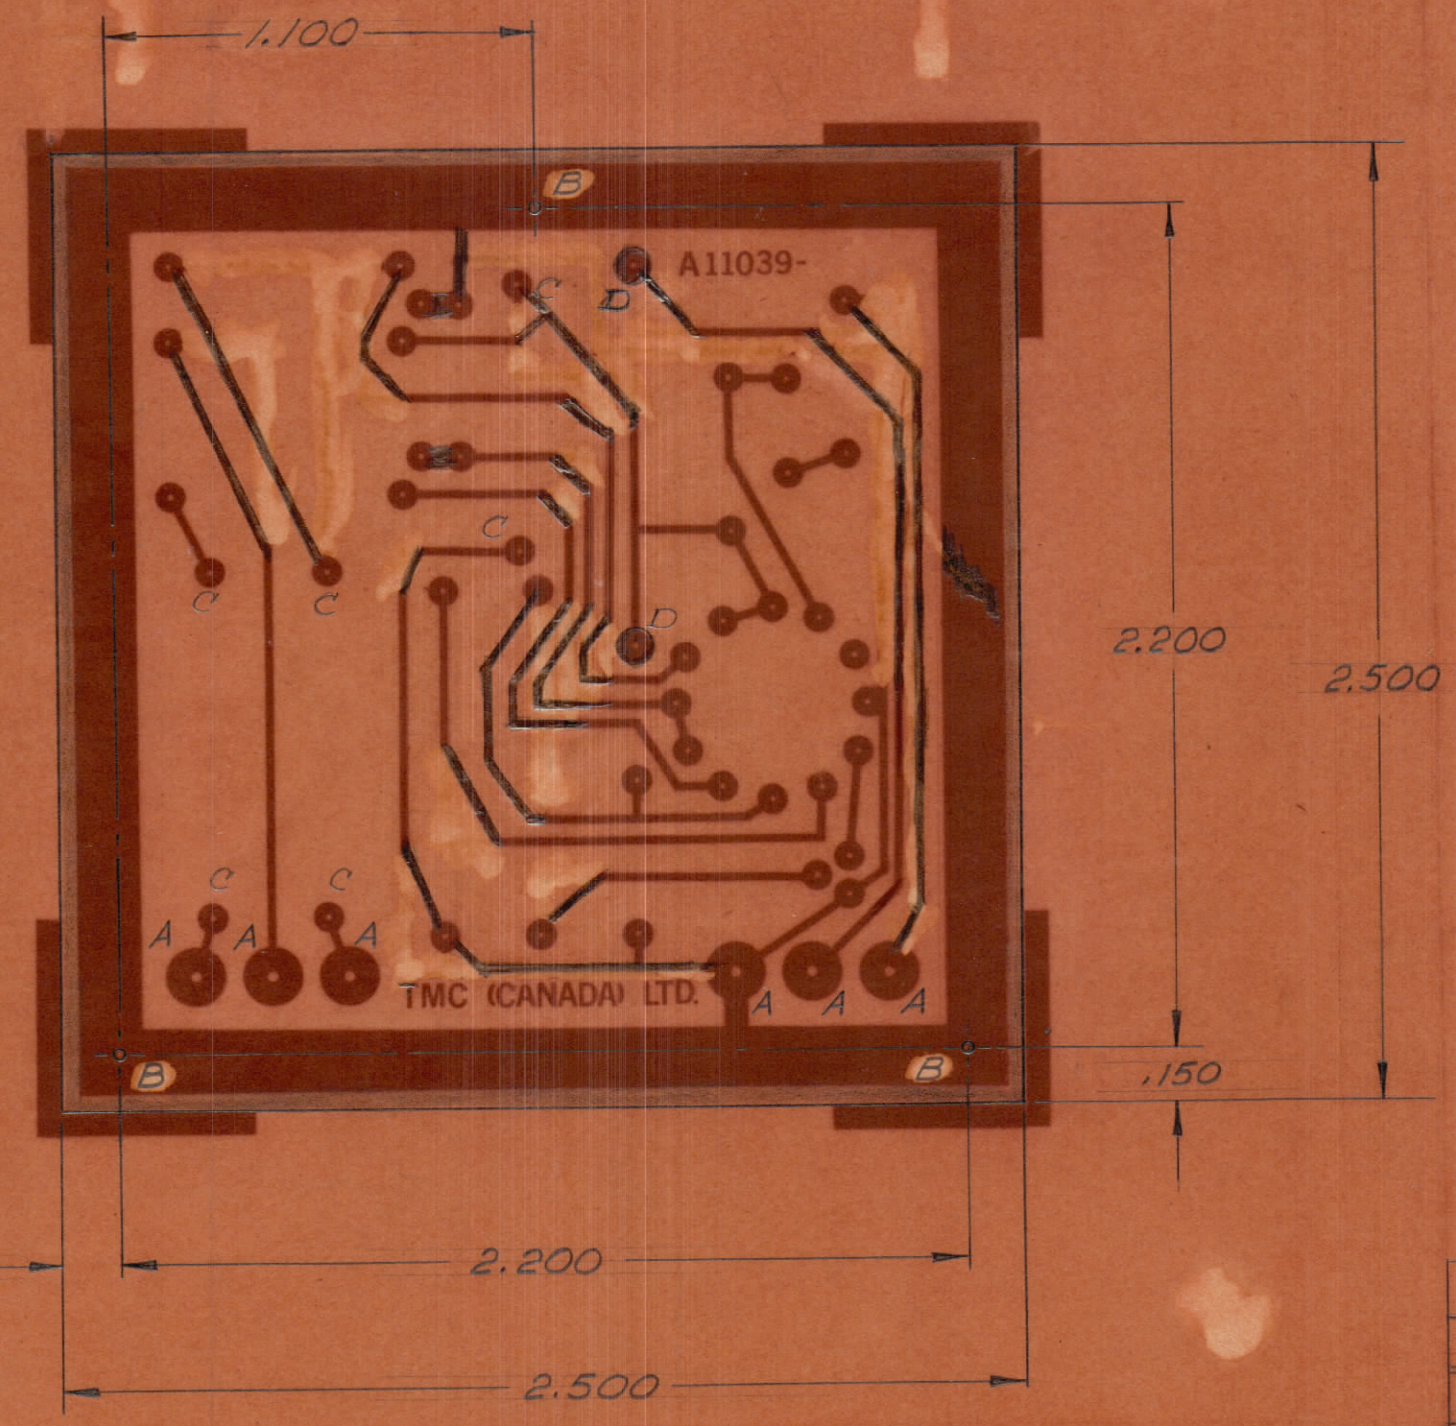

A-11039-2 X₂

HOLE DATA TABLE

HOLE	DESCRIPTION	QTY
A	.081 DIA	6
B	.189 DIA	3
C	.046 DIA	6
D	.067 DIA	2
UNMARKED	.037 DIA.	~

3. FINISH: TIN LEAD PLATE, .0003 THK MIN.
2. MATERIAL: EPOXY-GLASS LAMINATE, G10; FL-GE-.062-C1.
1. BOARD TO BE IN ACCORDANCE WITH TMC SPEC 3-735

NOTES:

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		LINE AMPLIFIER	
WEIGHT PER PC.		PRINTED CIRCUIT BOARD	
TYPE & TEMPER.	THOMAS	PROCTOR	
HEAT TREAT SPEC.	PROCTOR		
FINISH & SPEC. NO.	SHT. 2 OF 5		A-11039-2 X ₂

MODEL	PROJECT NO.	ASSY. NO.	DATE
		A-11039-5	13 MARCH 72

TOLERANCES		SCALE: 2:1
ALL DEC. DIM.	± .005	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	± .01	SIZES AND MANUFACTURERS
ANGULAR DIM.	± 30'	TOLERANCES ARE NOT INCLUDED