

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT
2

USED ON
MODEL
TRX-1

ASS'Y. NO.
DATE
7-11-62

A-3050


A

WINDING DATA

- WIND 30 TURNS ITEM 2 ON ITEM 1.
- SOLDER LEADS TO ITEM 1.
- COAT WITH ITEM 3.
- TEST RESISTANCE.

TEST DATA

- RESISTANCE - APPROX ZERO
- INDUCTANCE - 1.1 μ hy \pm 20%
- COIL Q 35-45 @ 7.9Mc

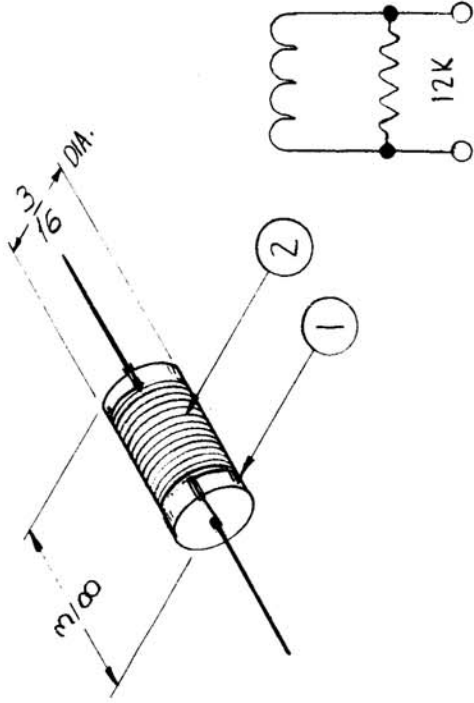

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A.	ADDED ITEM-49CHG #1	8/20/64	10910	AM.	<i>[Signature]</i>	
<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. \pm 1/64 DEC. \pm .05 ANGLES \pm 1/2°</p>						
<p>SCALE: NONE</p>						
<p>MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES</p>						
REQ. ITEM	PART NO.	MATERIAL				
X 4	BS-100	SOLDER, SOFT				
X 3	GL-102	ADHESIVE, Q-MAX				
X 2	WI-122-31	WIRE, MAGNET, SZ 31				
1	RC20GF123K	RESISTOR, FIXED COMPOSITION				
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
MATERIAL		CL-303 ASS'Y				
TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
		<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>		
FINISH & SPEC. NO.		A-3050 A				