
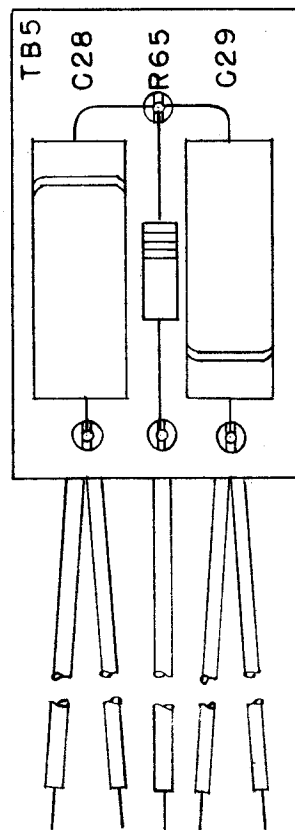


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

A-598

WIRE LENGTHS SHOWN FOR SRIR ARE TOTAL LENGTHS AND INCLUDE 3/4" EACH END FOR STRIPPING.

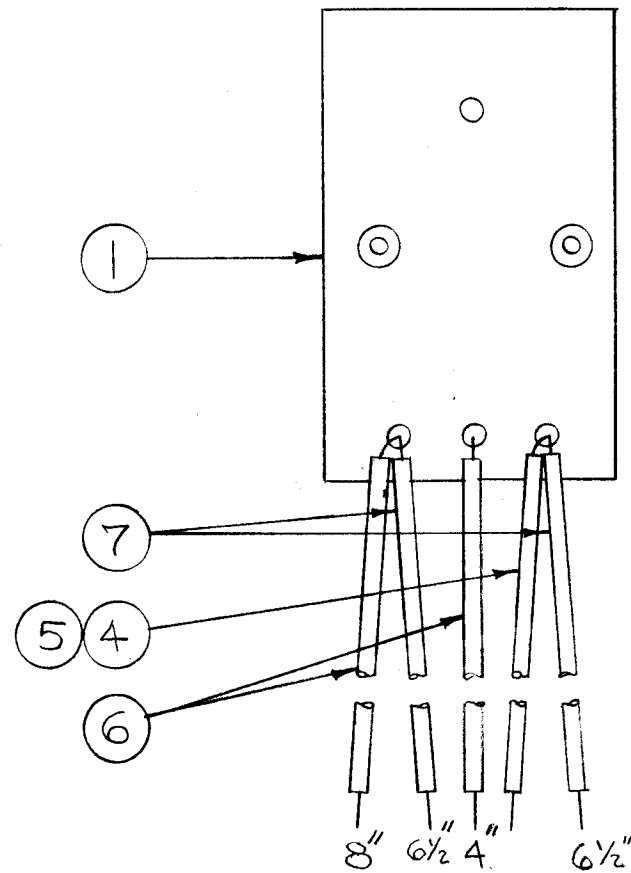

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	8	BS-100	SOLDER, SOFT (ALL CONNECTIONS)	
13"	7	SRIR3/5(7)22U66	CABLE, INSULATED (BLUE)	
12"	6	SRIR3/5(7)22U44	CABLE, INSULATED (YEL.)	
3 1/2"	5	PX-104-6-1022	INSULATION, SLEEVING (BLUE)	
4	4	WL-100-7	WIRE, BUSS BAR (22 GA.)	
1	3	RC20GF393 K	RESISTOR, FIXED	R65
2	2	CN-100-4	CAPACITOR, FIXED	C28 C29
1	1	A-597	TERM. BD. NO 5 SUB ASSY.	

STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
MATERIAL		TERM. BD. NO. 5 ASSEMBLY	
WEIGHT PER PC.		RSC-1	
TYPE & TEMPER		C.D.D. 11-25-53	G.T.O. <i>WDE</i>
HEAT TREAT. SPEC.		DRAWN	ELEC. DES. APP. MECH. DES. APP.
FINISH & SPEC. NO.		11-25-53	G.T.O. <i>WDE</i>
		CHECKED	FINAL APPROVAL
		A-598	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: #					
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					

1	RSC-1	170		11-25-53
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON				