


REQ. PER UNIT	1
MODEL	GPT-40K
USED ON ASSY. NO.	AR-116
DATE	2-29-60
AR-120	
B	


NON LATCH TYPE
 CONTACT ARRANGEMENT
 4C (A.P.D.T.)
 CONTACTS SILVER CADMIUM
 MOISTURE RESISTANT
 VARNISH ON COIL.

NOTE
 PHYSICAL APPEARANCE OF
 RELAYS WILL VARY
 DEPENDENDING ON VENDORS
 CONFIGURATION - IN ALL
 CASES ASSY WILL BE
 ELECTRICALLY &
 MECHANICALLY INTERCHANGEABLE

To E7604 of AR-116

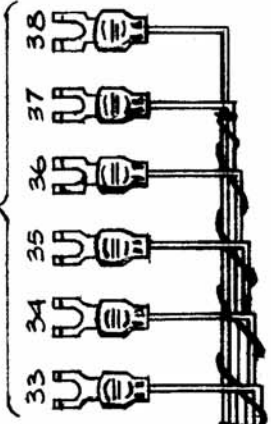

Over all Dims of
 Rela. Less Cable
 1.9375 x 4375 x
 1.4375.

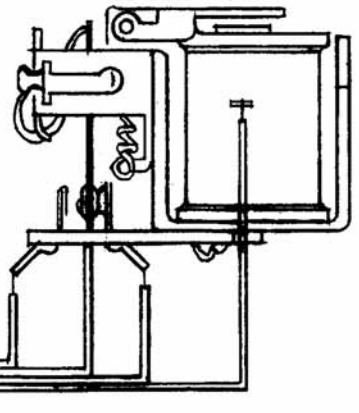

ISSUE ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
B	SHEET 2 OBSOLETE	10-30-58	2213	GDL					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
A	SHEET 2 e NOTE ADDED	3-16-58		GDL					BIAS RELAY ASSEMBLY (RELAY SOLENOID)		
TOLERANCES											
DEC. DIM. ±											
FRAC. DIM. ±											
ANGULAR DIM. ±											
SCALE: ZA-1833											
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES											
TYPE & TEMPER											
HEAT TREAT. SPEC.											
DRAWN											
CHECKED											
FINAL APPR VAL											
ELEC. DES. APP											
MECH. DES. APP											
FINISH & SPEC. NO.											
AR-120-B											