


REQ. PER UNIT	M DEL	USED ON	DATE
1	GPT-40 K	AR-116	4-12-60
		AR-121	A

NOTE

PHYSICAL APPEARANCE OF RELAYS WILL VARY DEPENDING ON VENDORS CONFIGURATION IN ALL CASES ASSY WILL BE ELECTRICALLY & MECHANICALLY INTERCHANGEABLE

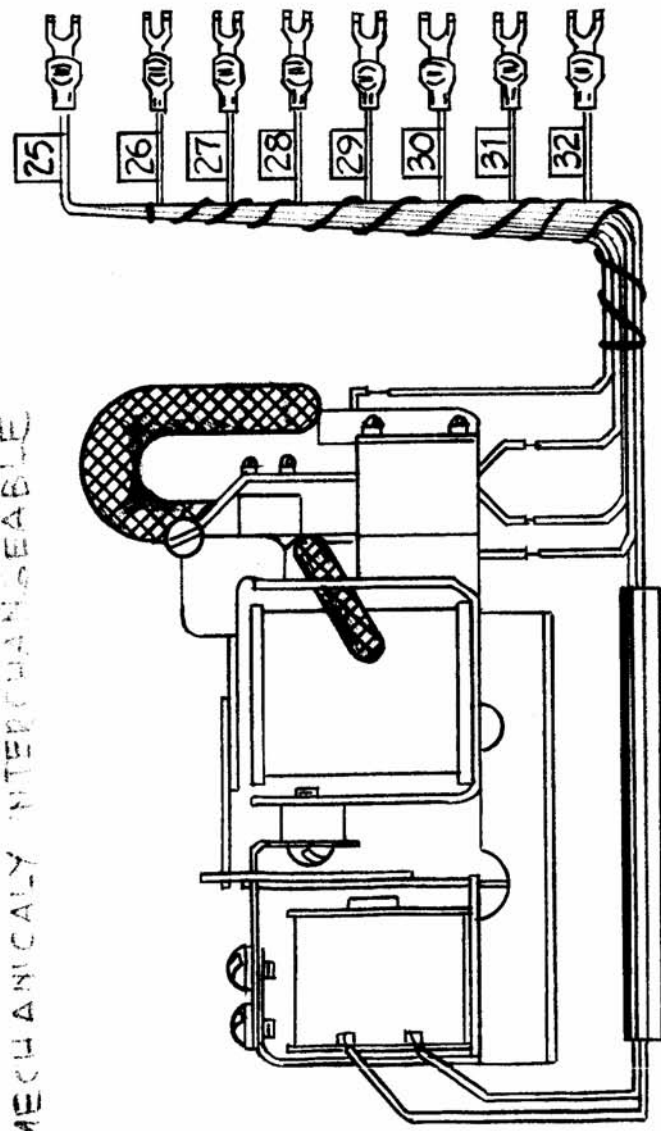

Mounting - 1/4 x 1/2, 4-5/32 D. Holes
 Overall Dimensions of Relay less Cable - 3.8125lg x 2.219w, x 2.4375.

LATCH TYPE
 CONTACT ARRANGEMENT - 4C (4.P.D.T.)
 CONTACTS SILVER CADMIUM
 MOISTURE RESISTANT
 YARNISH ON COILS.

NOTE

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		SWR RELAY ASSEMBLY	
ISSUE ITEM	CHANGED FROM		
A	NOTE ADD		
DATE	CH. NO.	DRAFTS	CHECKER
10-31-65	22116	C-DL	
SCALE: 2A-1832			
TOLERANCES			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			
DEC. DIM. ±			
FRAC. DIM. ±			
ANGULAR DIM. ±			
		DRAWN	CHECKED
		10	
			FINAL APPROVAL
			AR-121
			A