REQ. PER UNIT	USED ON			AR-123	B
	M DEL	ASS'Y. NO.	DATE		
1	GPT-40K	AR-116	2-26-60		

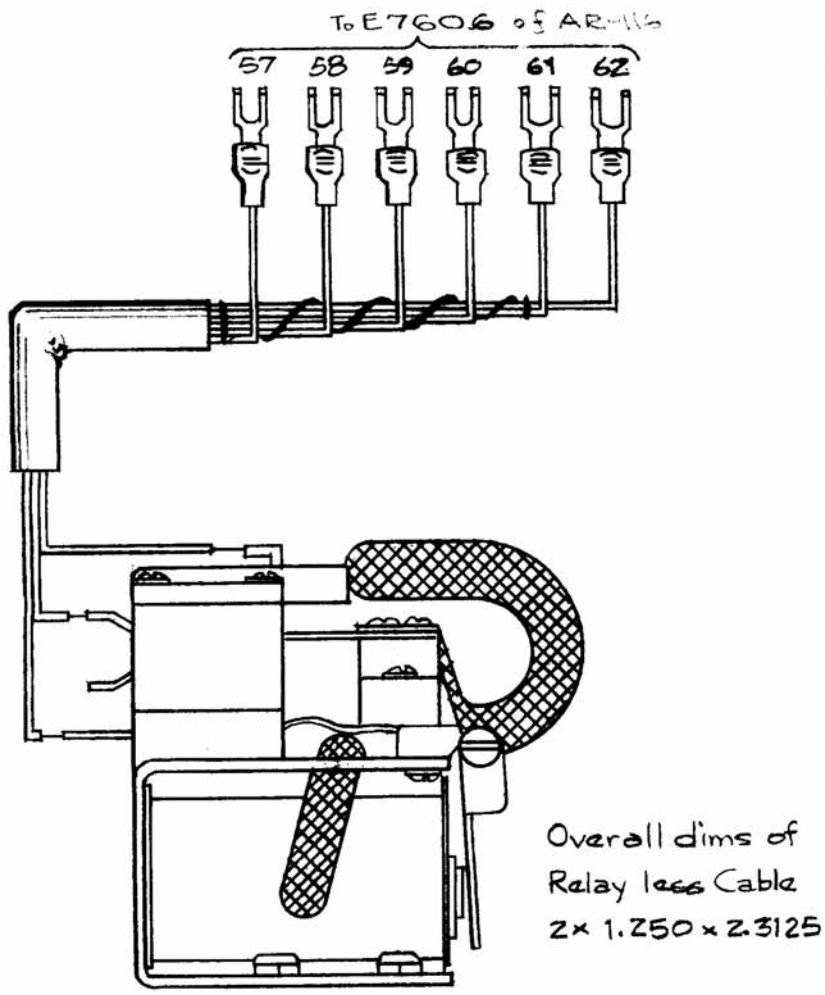

Overall dims of Relay less Cable
2 × 1.250 × 2.3125

NON-LATCH TYPE

CONTACT ARRANGEMENT
4C (4.P.D.T.)

CONTACTS SILVER CADIUM

MOISTURE RESISTANT VARNISH ON COIL.

NOTE:
PHICAL APPEANCE ON RELAYS WILL VARY DEPENDING ON VENDORS CONFIGURATION, IN ALL CASE'S ASSY WILL BE ELECTRICALY & MECHANICALY INTERCHANGEABLE

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		NOTE ADD	6-21-60		G.D.L.	RU	DB
A	1	WIRING CLARIFIED ON PICTORIAL	8/17/61	5447	L.L.	RU	DB

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 2A-1837

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

CROWBAR RELAY ASSY
(RELAY SOLENOID)

DRAWN	CHECKED	FINAL APPR VAL
		DB

ELEC. DES. APP	MECH. DES. APP	AR-123	B

FORM 108-A