


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

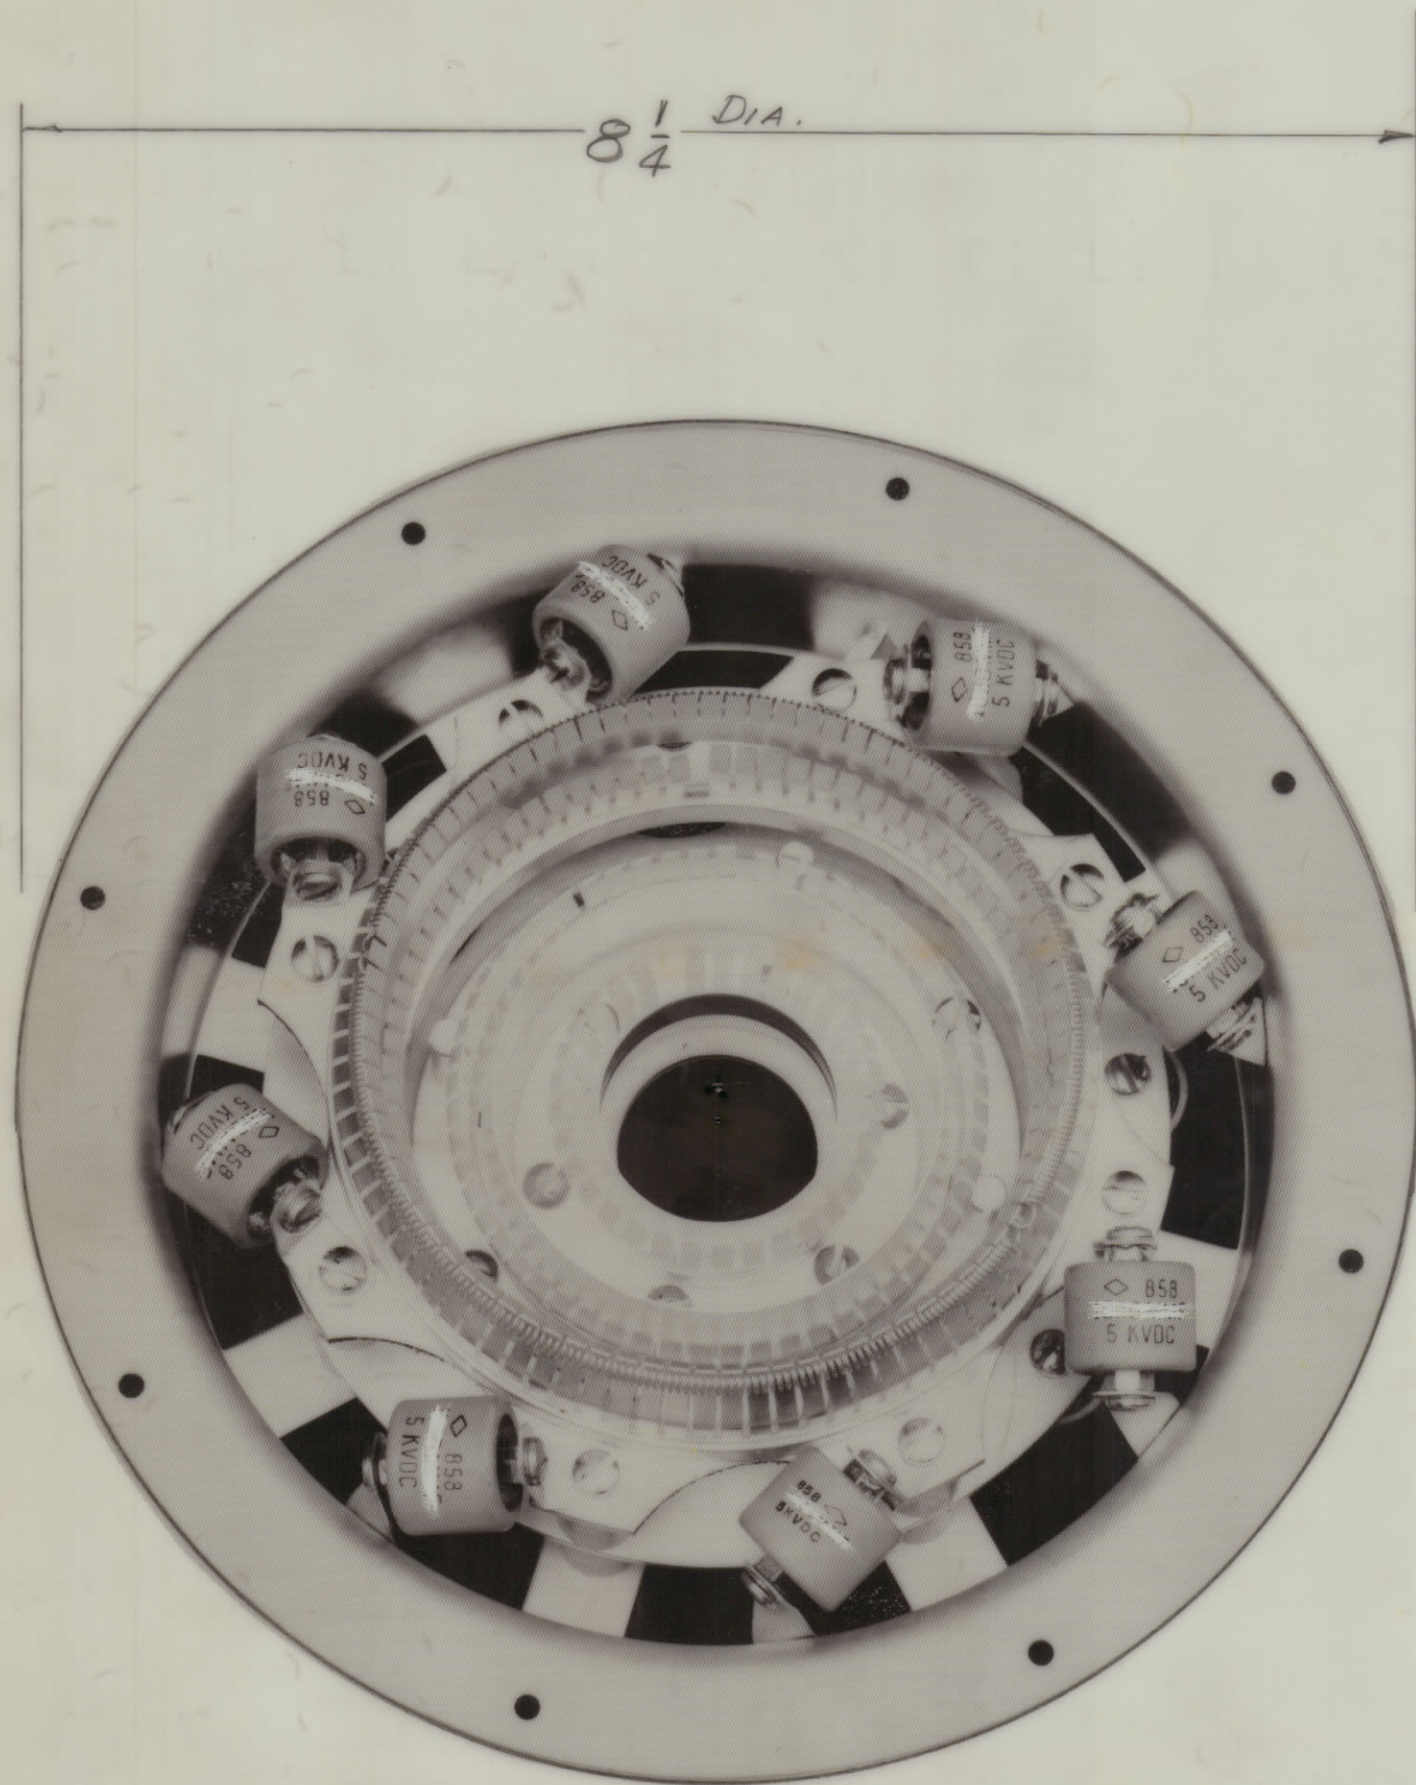

8 1/4 DIA.

8 1/4 IN. DIA X 3 10/16 IN. DEEP

8 .147 IN. DIA. HOLES SPACED AT 45° APART ON 7 3/4 IN. DIA. Ø

MECHANICAL SPECIFICATIONS:

1- SEE ILLUSTRATION

ELECTRICAL SPECIFICATIONS:

1- INCLUDES C919 THRU C926 ON THIS (TOP SIDE) OF SOCKET (500µmf).

2- INCLUDES C933 THRU C936 ON OTHER (BOTTOM SIDE) OF SOCKET. (50 µmf)

3- INDIVIDUAL CAPACITORS ARE REPLACEABLE.

AX-130 B

B	I	ON ELEC. SPEC. #2 50µmf WAS 1000µmf	1-25-63	8066	of	JHE	JHE
A		ELEC. SPEC. CLARIFIED	11/16/60	3472	RU	JHE	JHE
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: 8A-1663					
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.					

1	GPT-10K	T1-102 (PA)		
REQ. PER UNIT	MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
	CP	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE		
	CP	POWER AMPL. TUBE SOCKET ASSY.	
	MATERIAL	WEIGHT PER PC.	
	CP		
	TYPE & TEMPER	DRAWN	ELEC. DES. APP. MECH. DES. APP.
	CP		
	HEAT TREAT. SPEC.	CHECKED	FINAL APPROVAL
	CP		
	FINISH & SPEC. NO.		

AX-130 B