



50 CPS		60CPS	
220VAC	220 AC		
2650 (FREE AIR)	3250		
CLASS H	CLASS H		
1400 (FREE AIR)	2320		
4.0 REF. ONLY	6.5 REF. ONLY		
1300	1550		
4.5	MAX. C.F.M. :		
49 MAX	MAX. STATIC PRESSURE AT NO DELIVERY: 6.5		
CCW (VIEWED FROM MOTOR END)	TOTAL NET LBS. :	49 MAX	
3	ROTATION :	CCW (VIEWED FROM MOTOR END)	
	PHASE :	3	
	BLAST :	12 O'CLOCK	
	MOTOR FINISH	BLACK	
	HOUSING	BLACK	
	TEMP RISE	45°C	
	MFGR P/N	BT4530B-0-4	
	BOTH TROPICALIZED FOR 95% HUMIDITY		

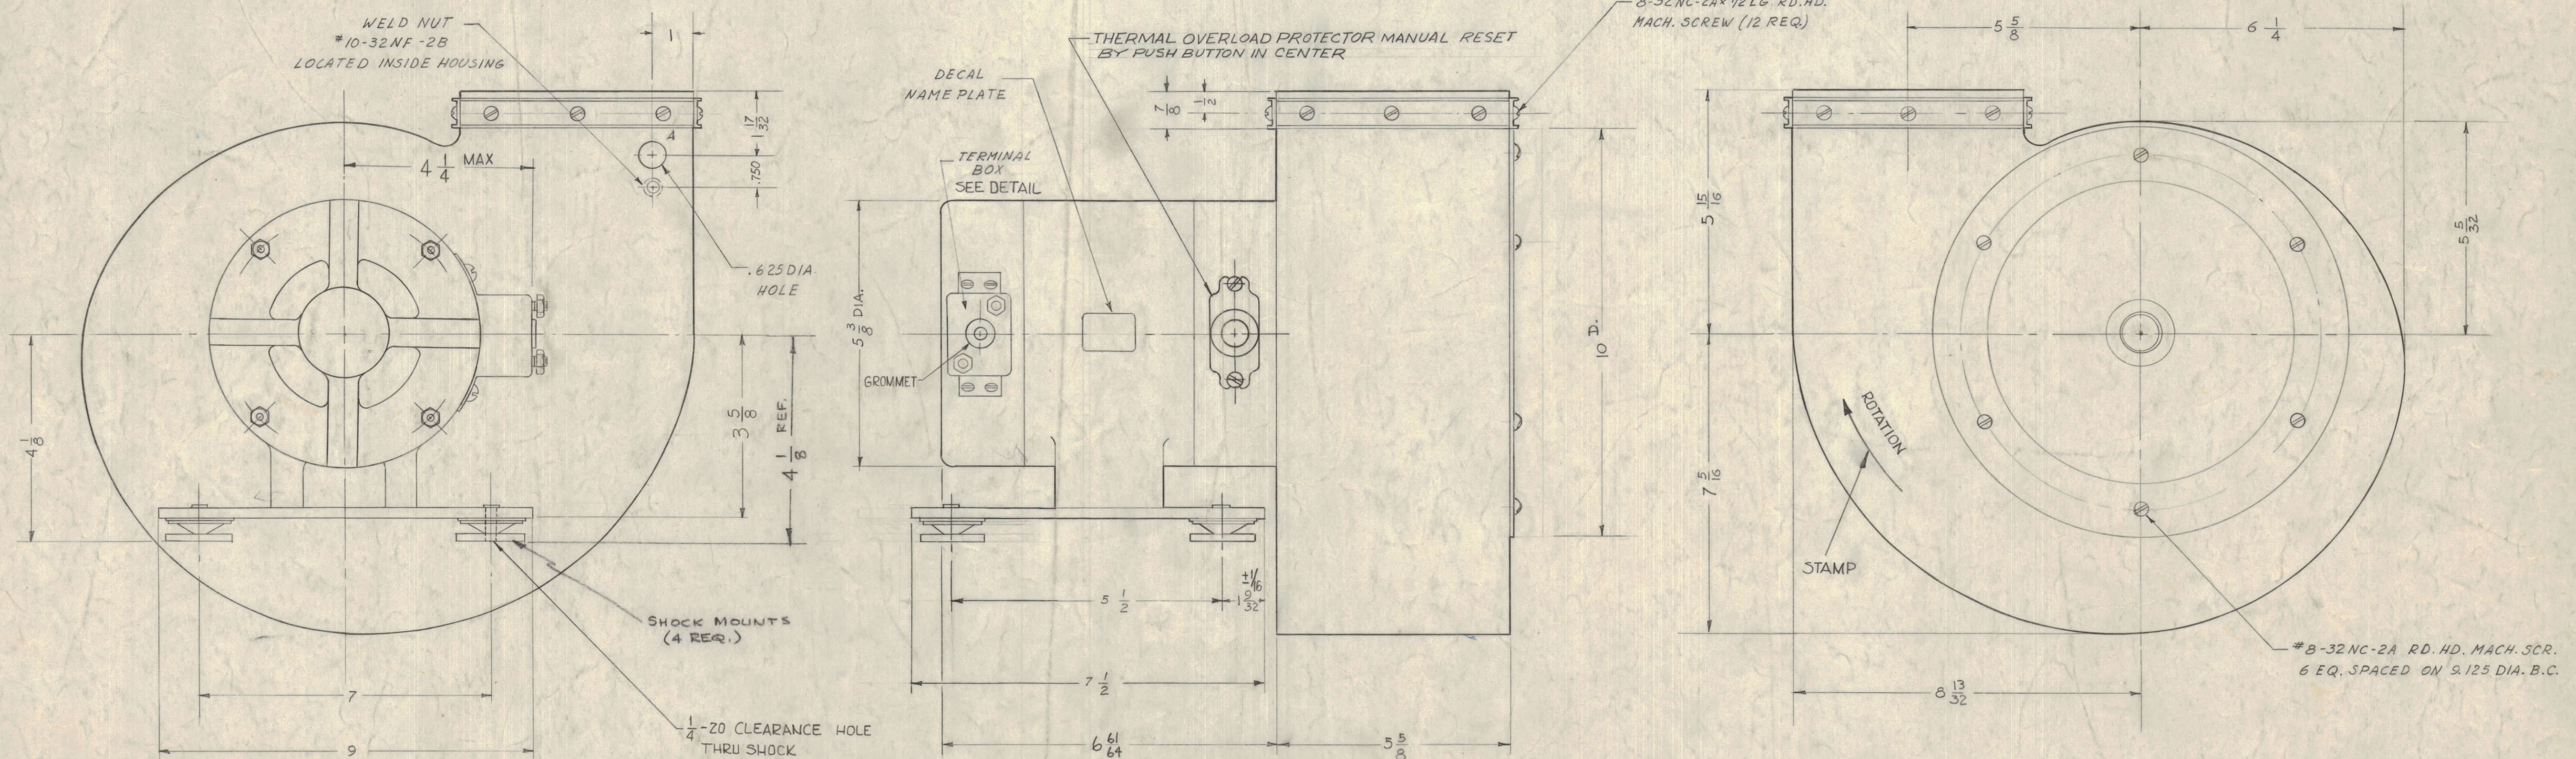

TMC PART/NO SHALL BE IN THE FOLLOWING FORM

BL111-60

BASIC TMC PT/NO 50 OR 60 CPS (AS REQ)

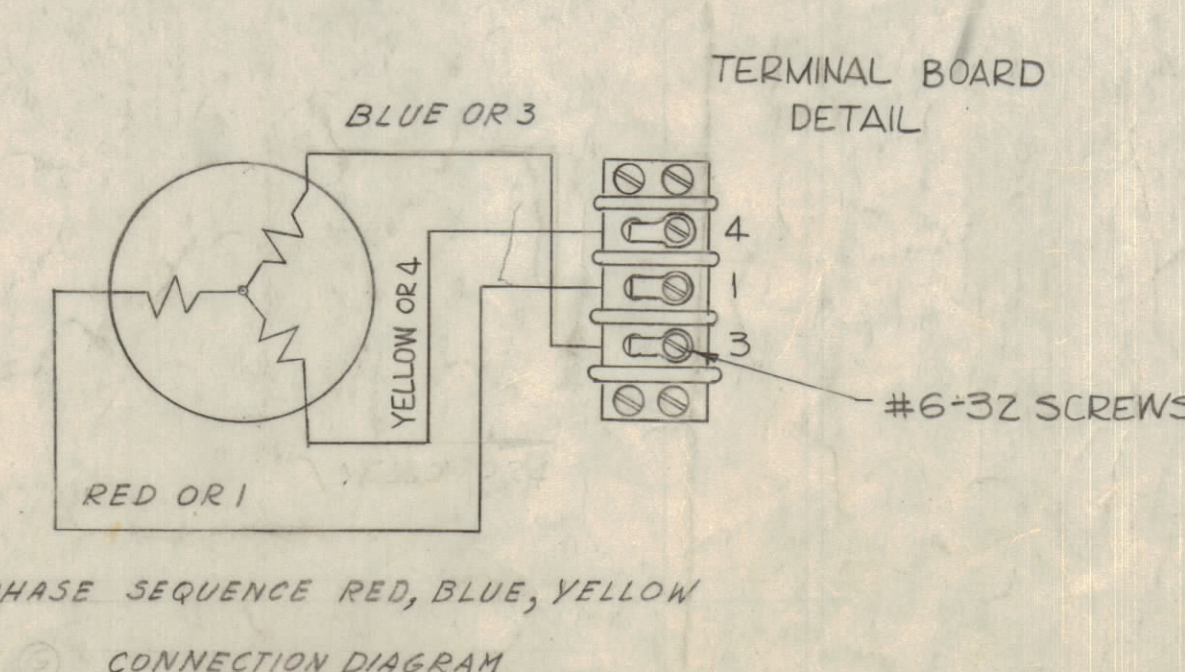

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
E	65	PICTORIAL CLARIFIED	7-20-61	18400	GDL	H.D.	J.M.
D	64	ON 50CPS, SPECS W/REF ONLY TO 4.0 ADDED	11-1-66	17102	WHD	G.P.	R.P.
C	63	50 CPS SPECS ADDED; PT/NO EX ADD	1-12-65	13238	J.P.	G.P.	R.P.
B	62	SPECS INSULATION WAS CLASS B; ON S401-116	8-23-63	9823	J.P.	G.P.	R.P.
A	61	BT4530B-0-4 WAS BT4530B-0-1; DIM. 5.4 IN. MAX	8-1-61	5381	GDL	R.U.	H.D.
		DECAL NAMEPLATE RELOCATED					
		ON TERMINAL BOX STUDS ADDED					

UNLESS OTHERWISE SPECIFIED: SCALE S401-116

DIMENSIONS ARE IN INCHES

TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASSY. NO.	DATE	TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	SHEET	OF
1	GPT-10K	AX-138		6-14-61						BL-111	E

DEFIANCE NO. 1020 34232