



REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	X3	REVISED AND REDRAWN	4-14-65				
	X	ORIGINAL RELEASE FOR PRODUCTION	5/3/67				

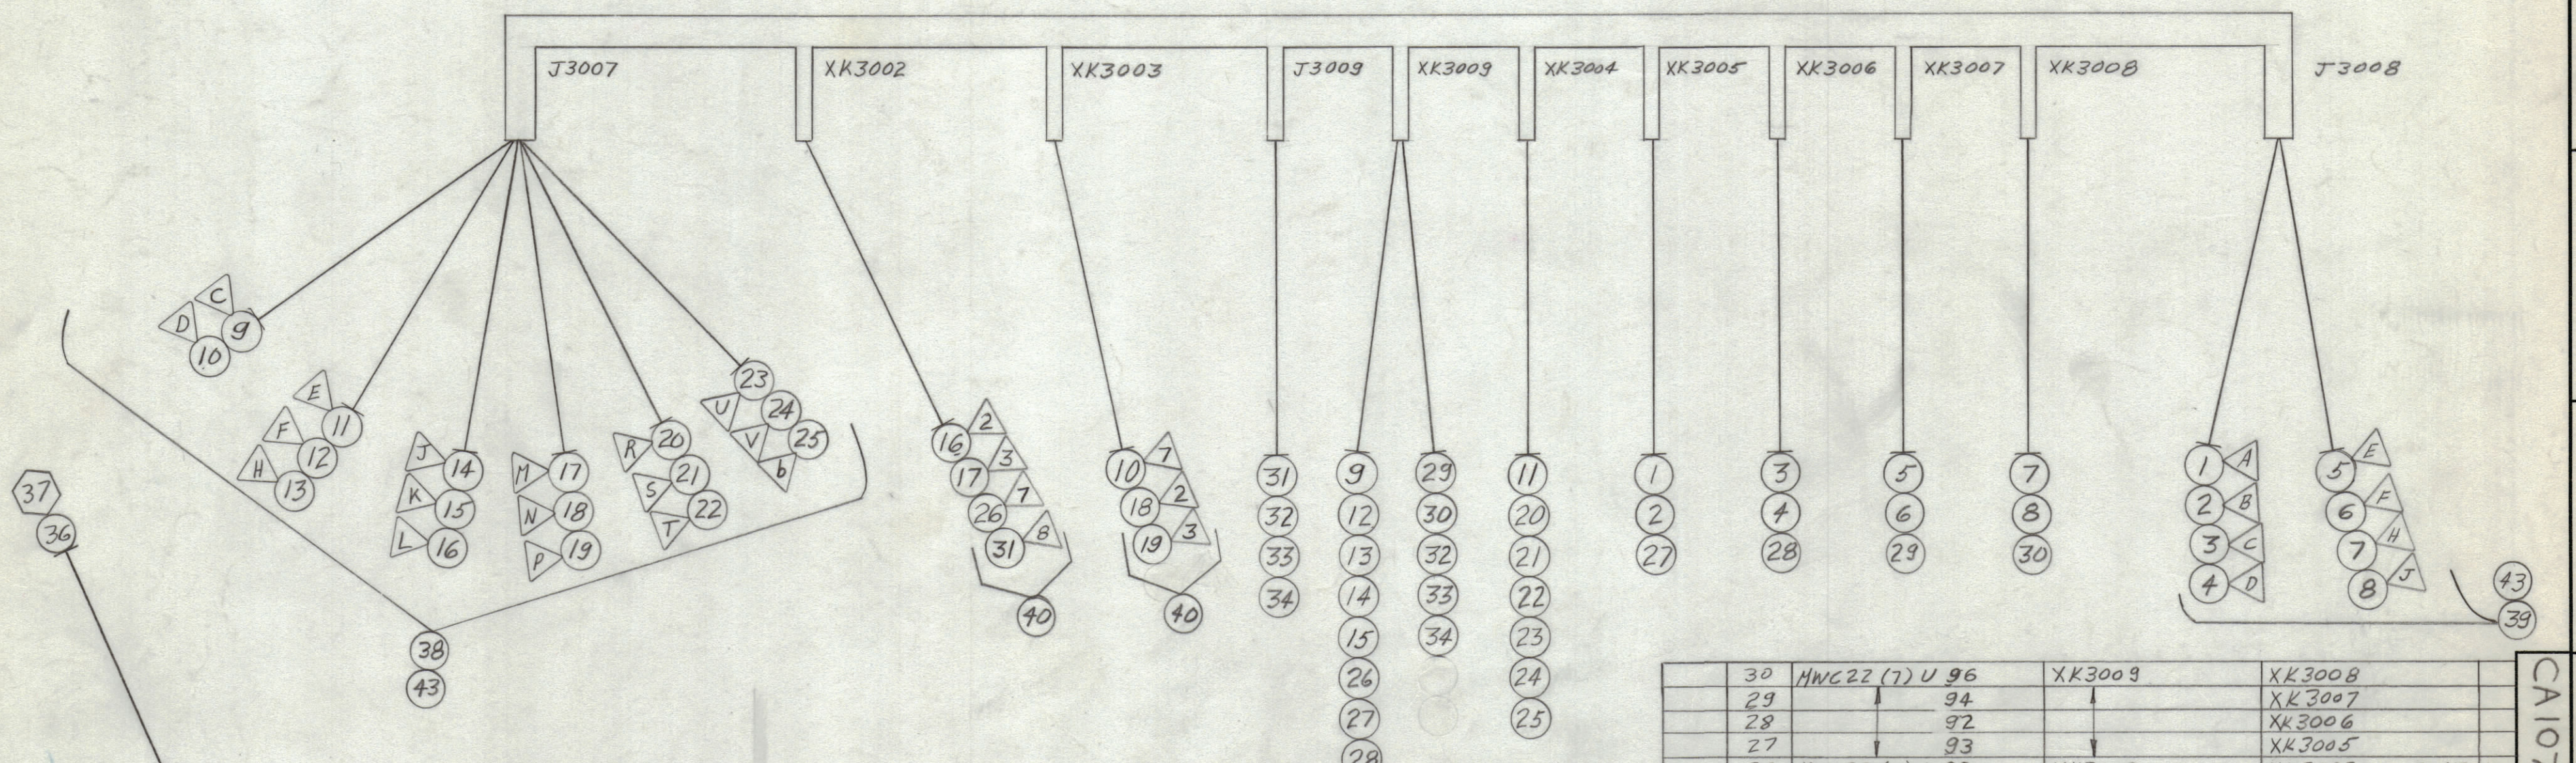

47					
46					
45	CD101-1M	CORD, NYLON, LACING			
44	BS100	SOLDER, TIN ALLOY			
43	PX830-16-1	INS. SLVG ELEC. SHRINK			
42	PX104-1-034	INS. SLVG, ELEC.			
41	WL100-7	WIRE, ELEC BUSS			
2	40	TS101-P01	SOC, EL TUBE-OCT		
1	39	JJ200-2	CONN, RECP ELEC.	J3008	
1	38	JJ200-4	CONN, RECP ELEC.	J3007	
2	37	TE104-1	TERM, LUG -LKG		
	36	MWC20(7)U0	J3007	PIN B	
	35	MWC22(7)U0	J3007	PIN X	
	34	MWC20(7)U2	J3009	PIN D	XK3009
	33				C XK3009
	32				B XK3009
	31	MWC20(7)U0	J3009	PIN A	XK3002 PIN B
REQ'D	ITEM	PIN	DESCRIPTION	SYM.	

30	MWC22(7)U96	XK3009	XK3008		
29			XK3007		
28			XK3006		
27			XK3005		
26	MWC22(7)U90	XK3009	XK3002	PIN 7	
25	MWC22(7)U97	J3007	XK3004	PIN b	
24				V	
23				U	
22				T	
21				S	
20				R	XK3004
19				P	XK3003 PIN 3
18				N	XK3003 PIN 2
17				M	XK3002 PIN 3
16				L	XK3002 PIN 2
15				K	XK3009
14				J	
13				H	
12				F	XK3009
11				E	XK3004
10				D	XK3003 PIN 7
9	MWC22(7)U1	J3007	XK3009	PIN C	
8	MWC22(7)U98	J3008	XK3008	PIN J	
7				H	XK3008
6				F	XK3007
5				E	XK3007
4				D	XK3006
3				C	XK3006
2				B	XK3005
1	MWC22(7)U91	J3008	XK3005	PIN A	
REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL	

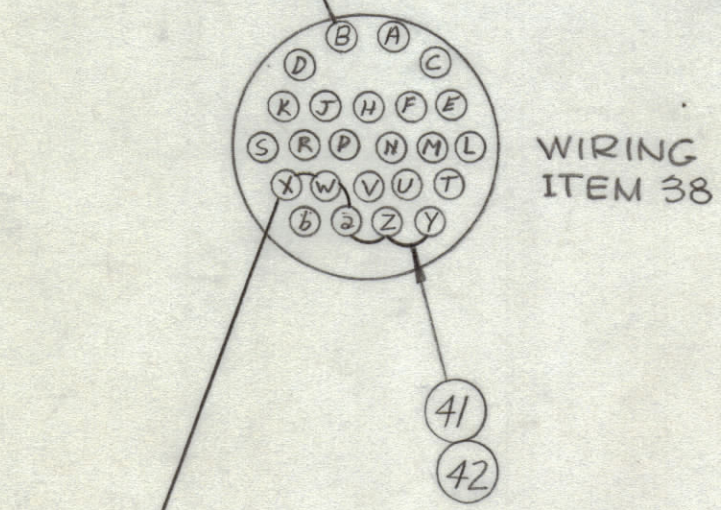

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

1	AX566	A420B
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

B. NAP				LIST OF MATERIAL			
MATERIAL				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH				TITLE: WIRING HARNESS, BRANCHED			
DRAWN: <i>BN</i>		DATE: 3-11-65		FINAL APPROVAL: <i>OS</i>		DATE: 5/3/67	
CHECKED: <i>BN</i>		DATE: 7/22/65		SHEET: CA1074		REV. LTR.:	
ELECT. DES.:		DATE:		SHEET:		REV. LTR.:	
MECH. DES.:		DATE:		SHEET:		REV. LTR.:	

CA1074