


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.


DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.


REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
21 1/2	1	MWC22(7)U91	WIRE ELECTRICAL, WH/BRN	
10	2	MWC22(7)U1	WIRE ELECTRICAL, BRN.	
15	3	MWC22(7)U1	WIRE ELECTRICAL, BRN.	
18	4	MWC22(7)U1	WIRE ELECTRICAL, BRN	
R/R	5	CD-101-1MW	CORD LACING, NYLON	

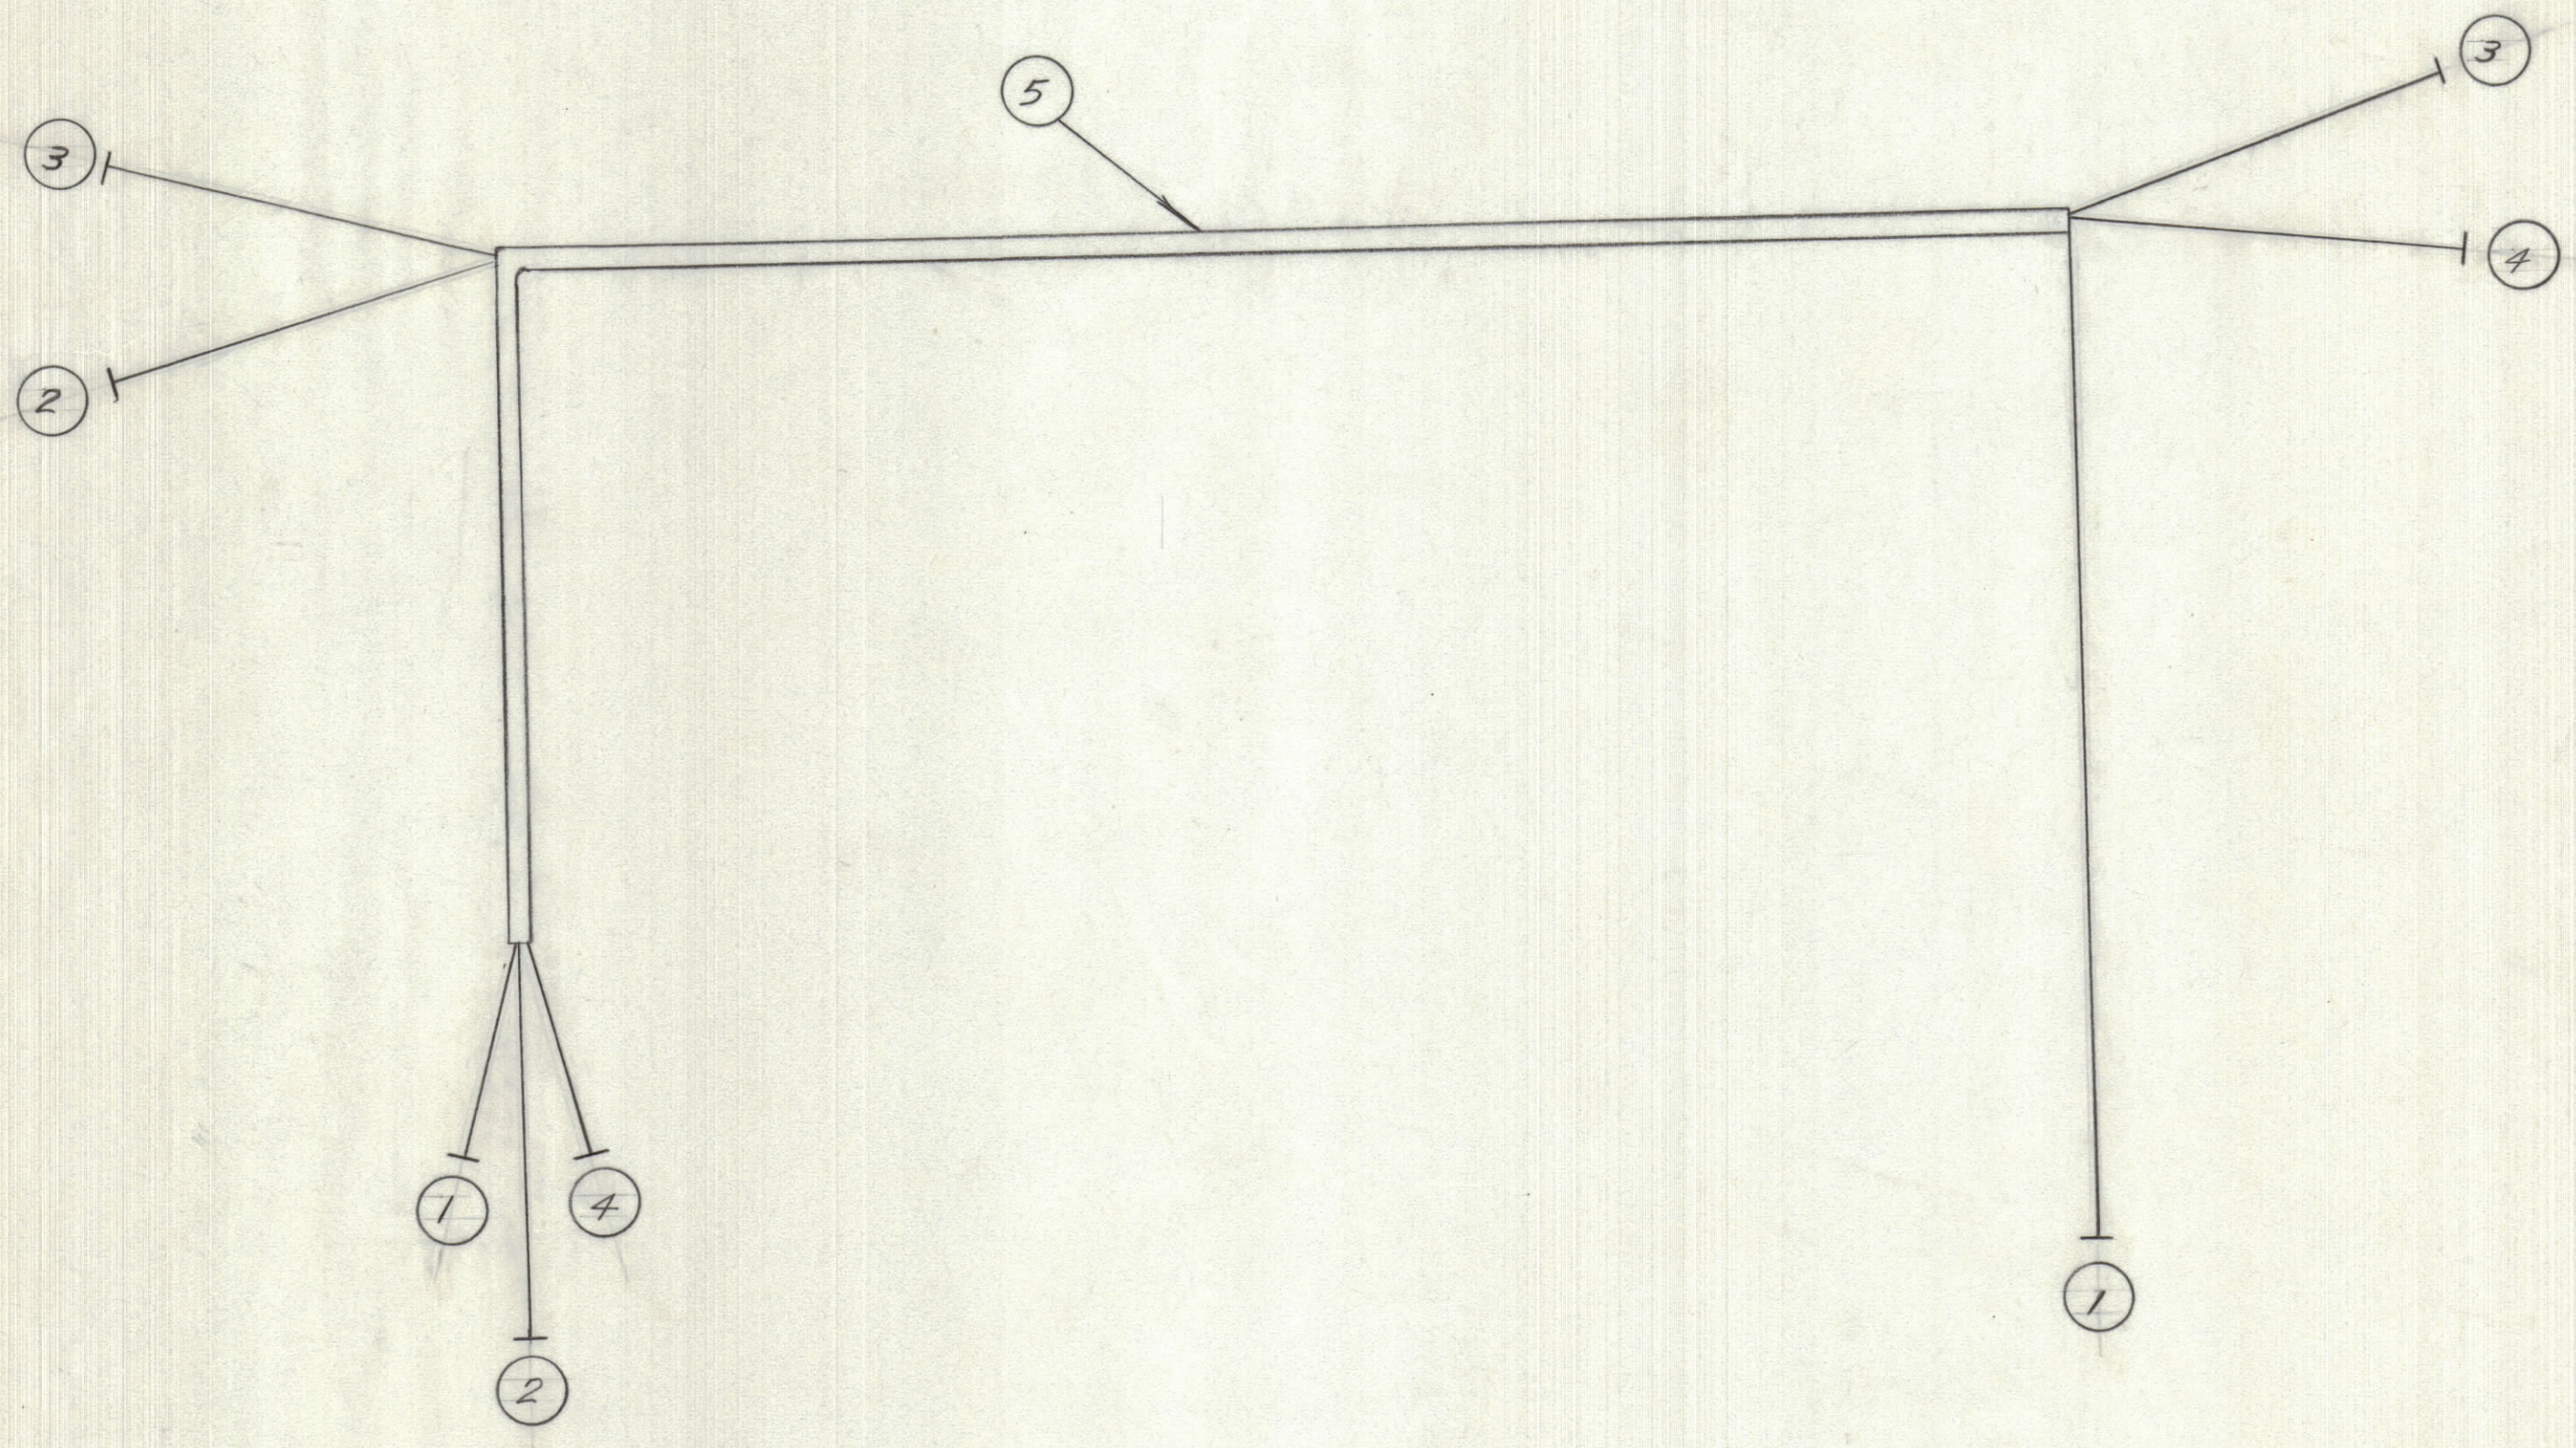

CA-10144

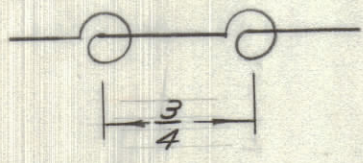

SPACE LACING APPROX. 3/4" APART

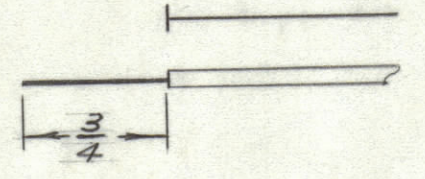

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

TOLERANCES		SCALE:
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

CDCR-1			3-1-64
MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL			
WEIGHT PER PC.		POWER CABLE	
TYPE & TEMPER		HARNESS	
HEAT TREAT. SPEC.		RDES.	
CHECKED		MECH. DES. APP.	
FINISH & SPEC. NO.		FINAL APPROVAL	
		CA-10144	