


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0		REL TO PROD	20-6-66			RD	
A		CA 10457-1 8" WAS 12"	JUNE 30/66			GM	

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	1	MWC18(16)U1	WIRE ELECTRICAL INSUL	
	2	MWC18(16)U2	WIRE ELECTRICAL INSUL	
	3	MWC18(16)U3	WIRE ELECTRICAL INSUL	
	4	MWC18(16)U4	WIRE ELECTRICAL INSUL	
	5	MWC18(16)U5	WIRE ELECTRICAL INSUL	
	6	PX830-10-1	INSULATION SLEEVING	
	7	PL101-2	CONNECTOR	
	8	MWC18(16)U6	WIRE ELECTRICAL INSUL	

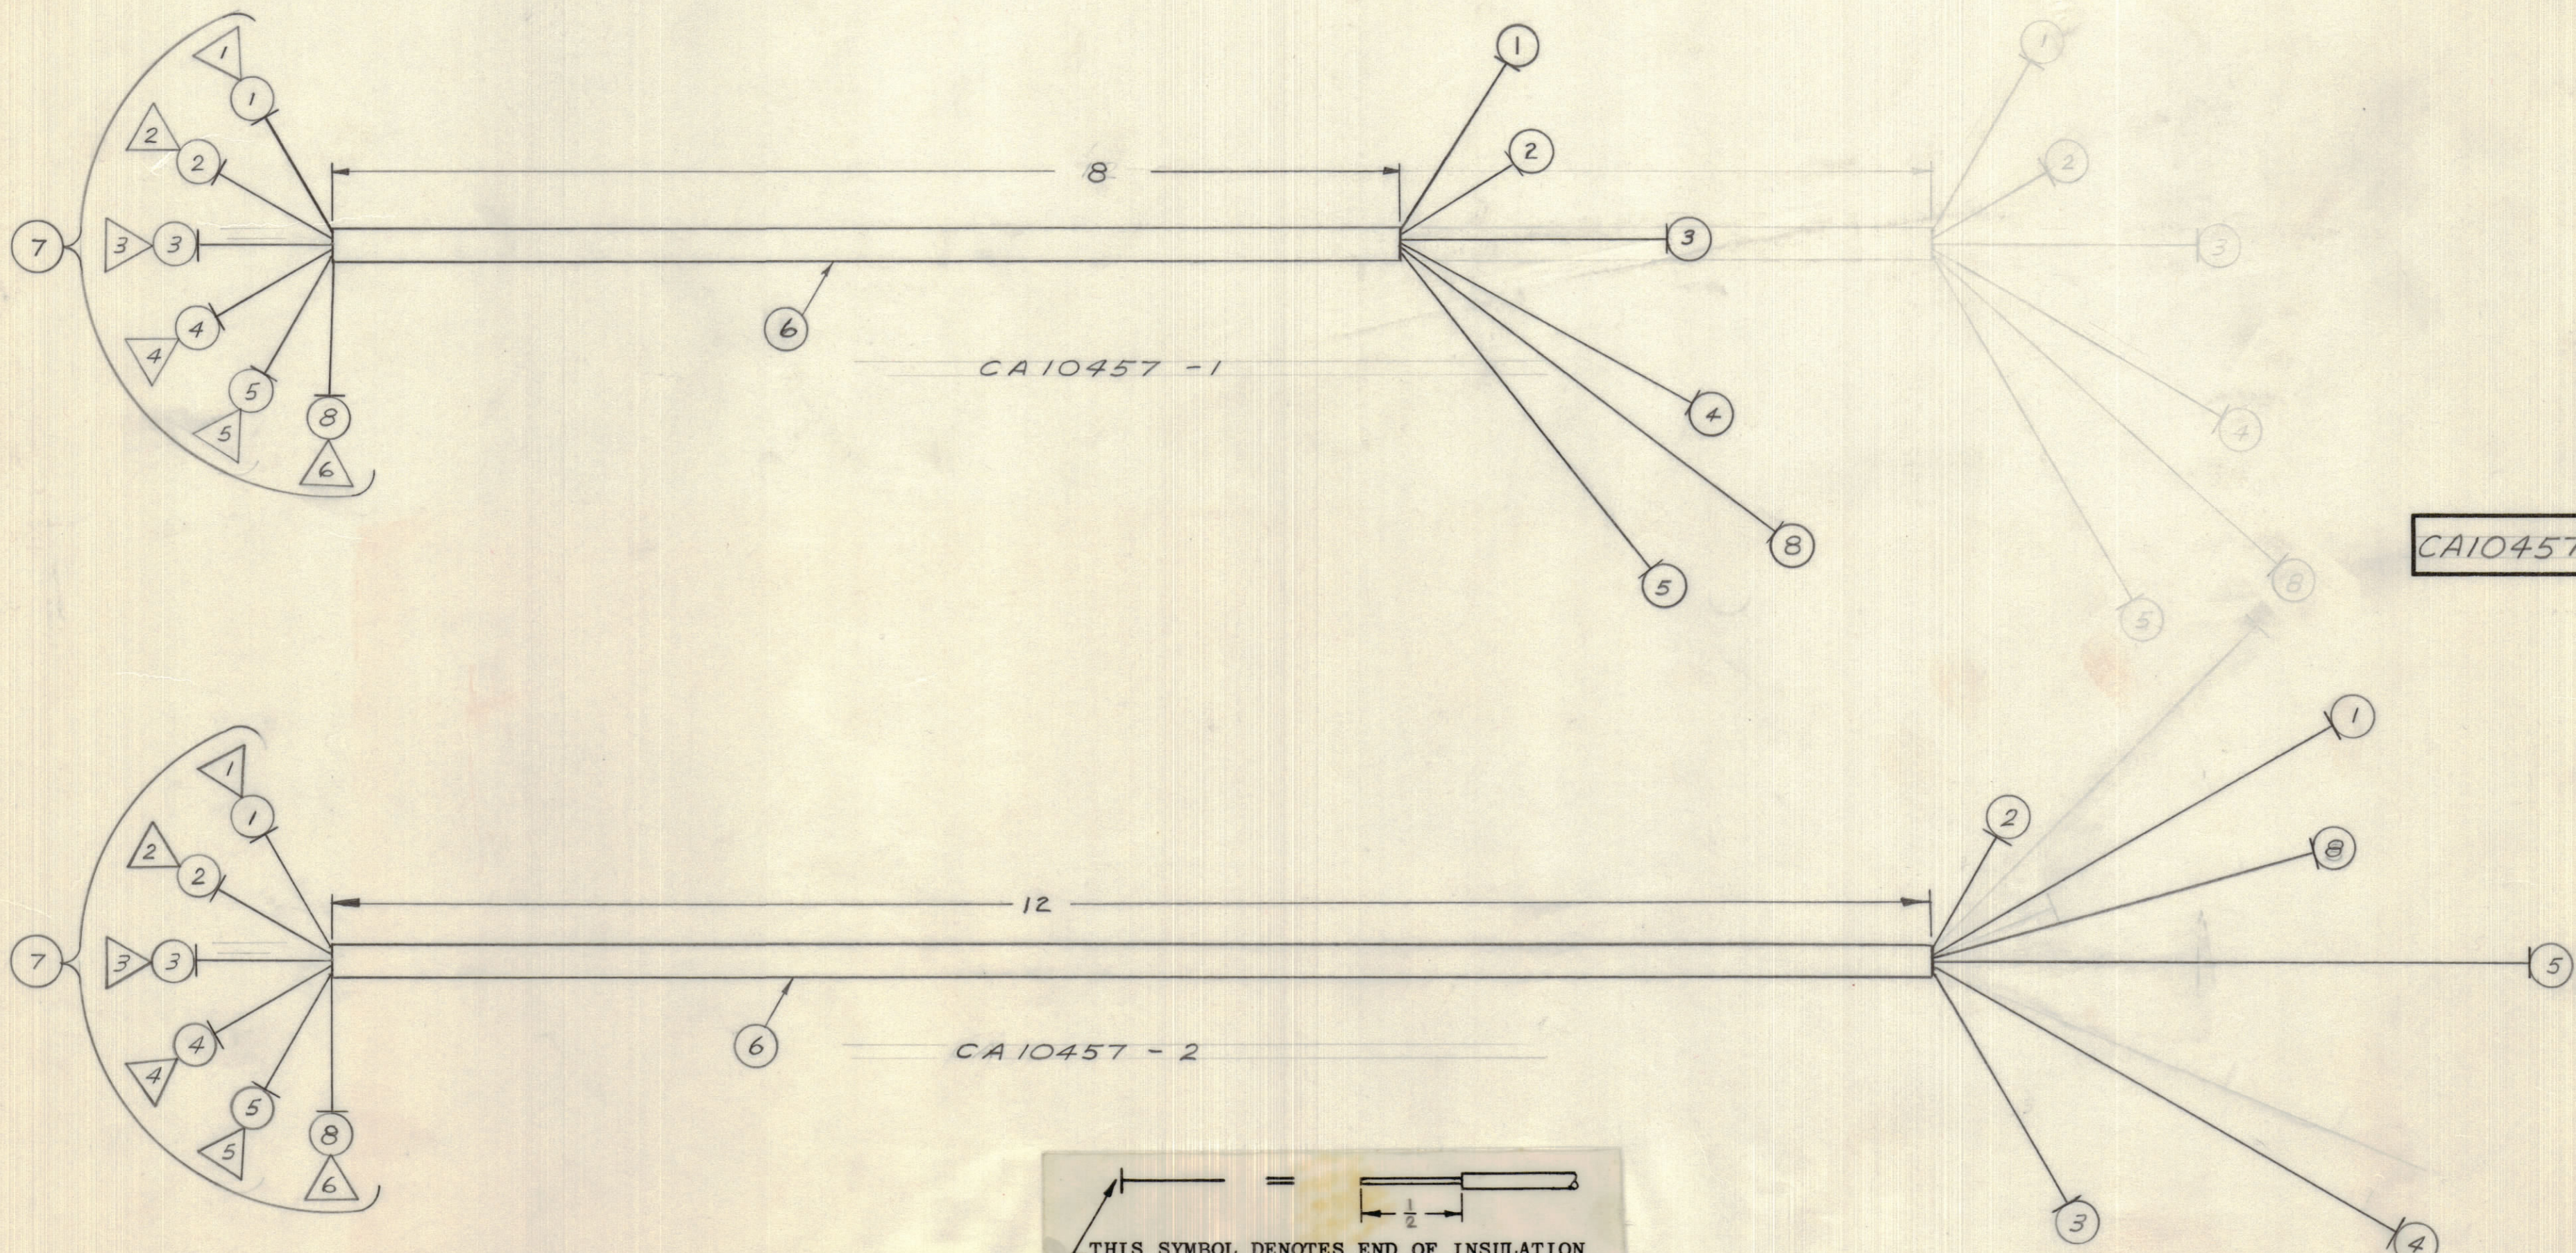

CA10457 A

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

▷ DENOTES PIN NO'S ON ITEM 7

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AX 10025	050/66	20 JUNE 66
MODEL	PROJECT NO.	DATE
USED ON		

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, PWR SUPPLY	
WEIGHT PER PC.		INTERCONNECTING	
TYPE & TEMPER		RD	
HEAT TREAT. SPEC.		DRAWN	ELEC. DES. APP. MECH. DES. APP.
FINISH & SPEC. NO.		CHECKED	FINAL APPROVAL
		AUBREY	CA10457 A