


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL. TO PROD.	APR 7.69		AWa		
A		REV AS PER CEMN	MAY 1978	777	H		
B		ITEM A THRU G COLOR CHANGE	11.6.84	22081	GDL		
C		ITEM B DELETED CHANGE ITEM G	11.11.84		GDL		
D		COLOR TO ITEMS 3, 6, 7 & 8 CHANGE	2.5.91		GDL		
E		REVISED & UPDATED	8.21.91		GDL		
F		REVISED	3-4-93		GDL		

BREAK OUT	FROM COMPONENT	BREAK OUT	TO COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		A	IFL1	E	1	MWC20(7)U98	WIRE ELECTRICAL INSUL	
		A	IFL2	E	2	MWC20(7)U3		
		E	ISI-ON L.H.SIDE	D	3	DELETED		
		E	ISI-ON R.H.SIDE	D	4	MWC20(7)U7		
		D	IXDS1 - LH SIDE	C	5	MWC20(7)U9		
		D	IXDS1 - RH SIDE	B	6	MWC20(7)U96		
		C	IXF1 - SIDE	F	7	MWC20(7)U1		
		B	IXF2 - SIDE	F	8	MWC20(7)U94	WIRE ELECTRICAL INSUL	
					17	9	CJ142-B	STRAP, CABLE
					1	10	EY102-2	GROMMET
					1"	11	PX100-9-166	SLEEVING MARKED CA10537 C/W LATEST REVISION LETTER

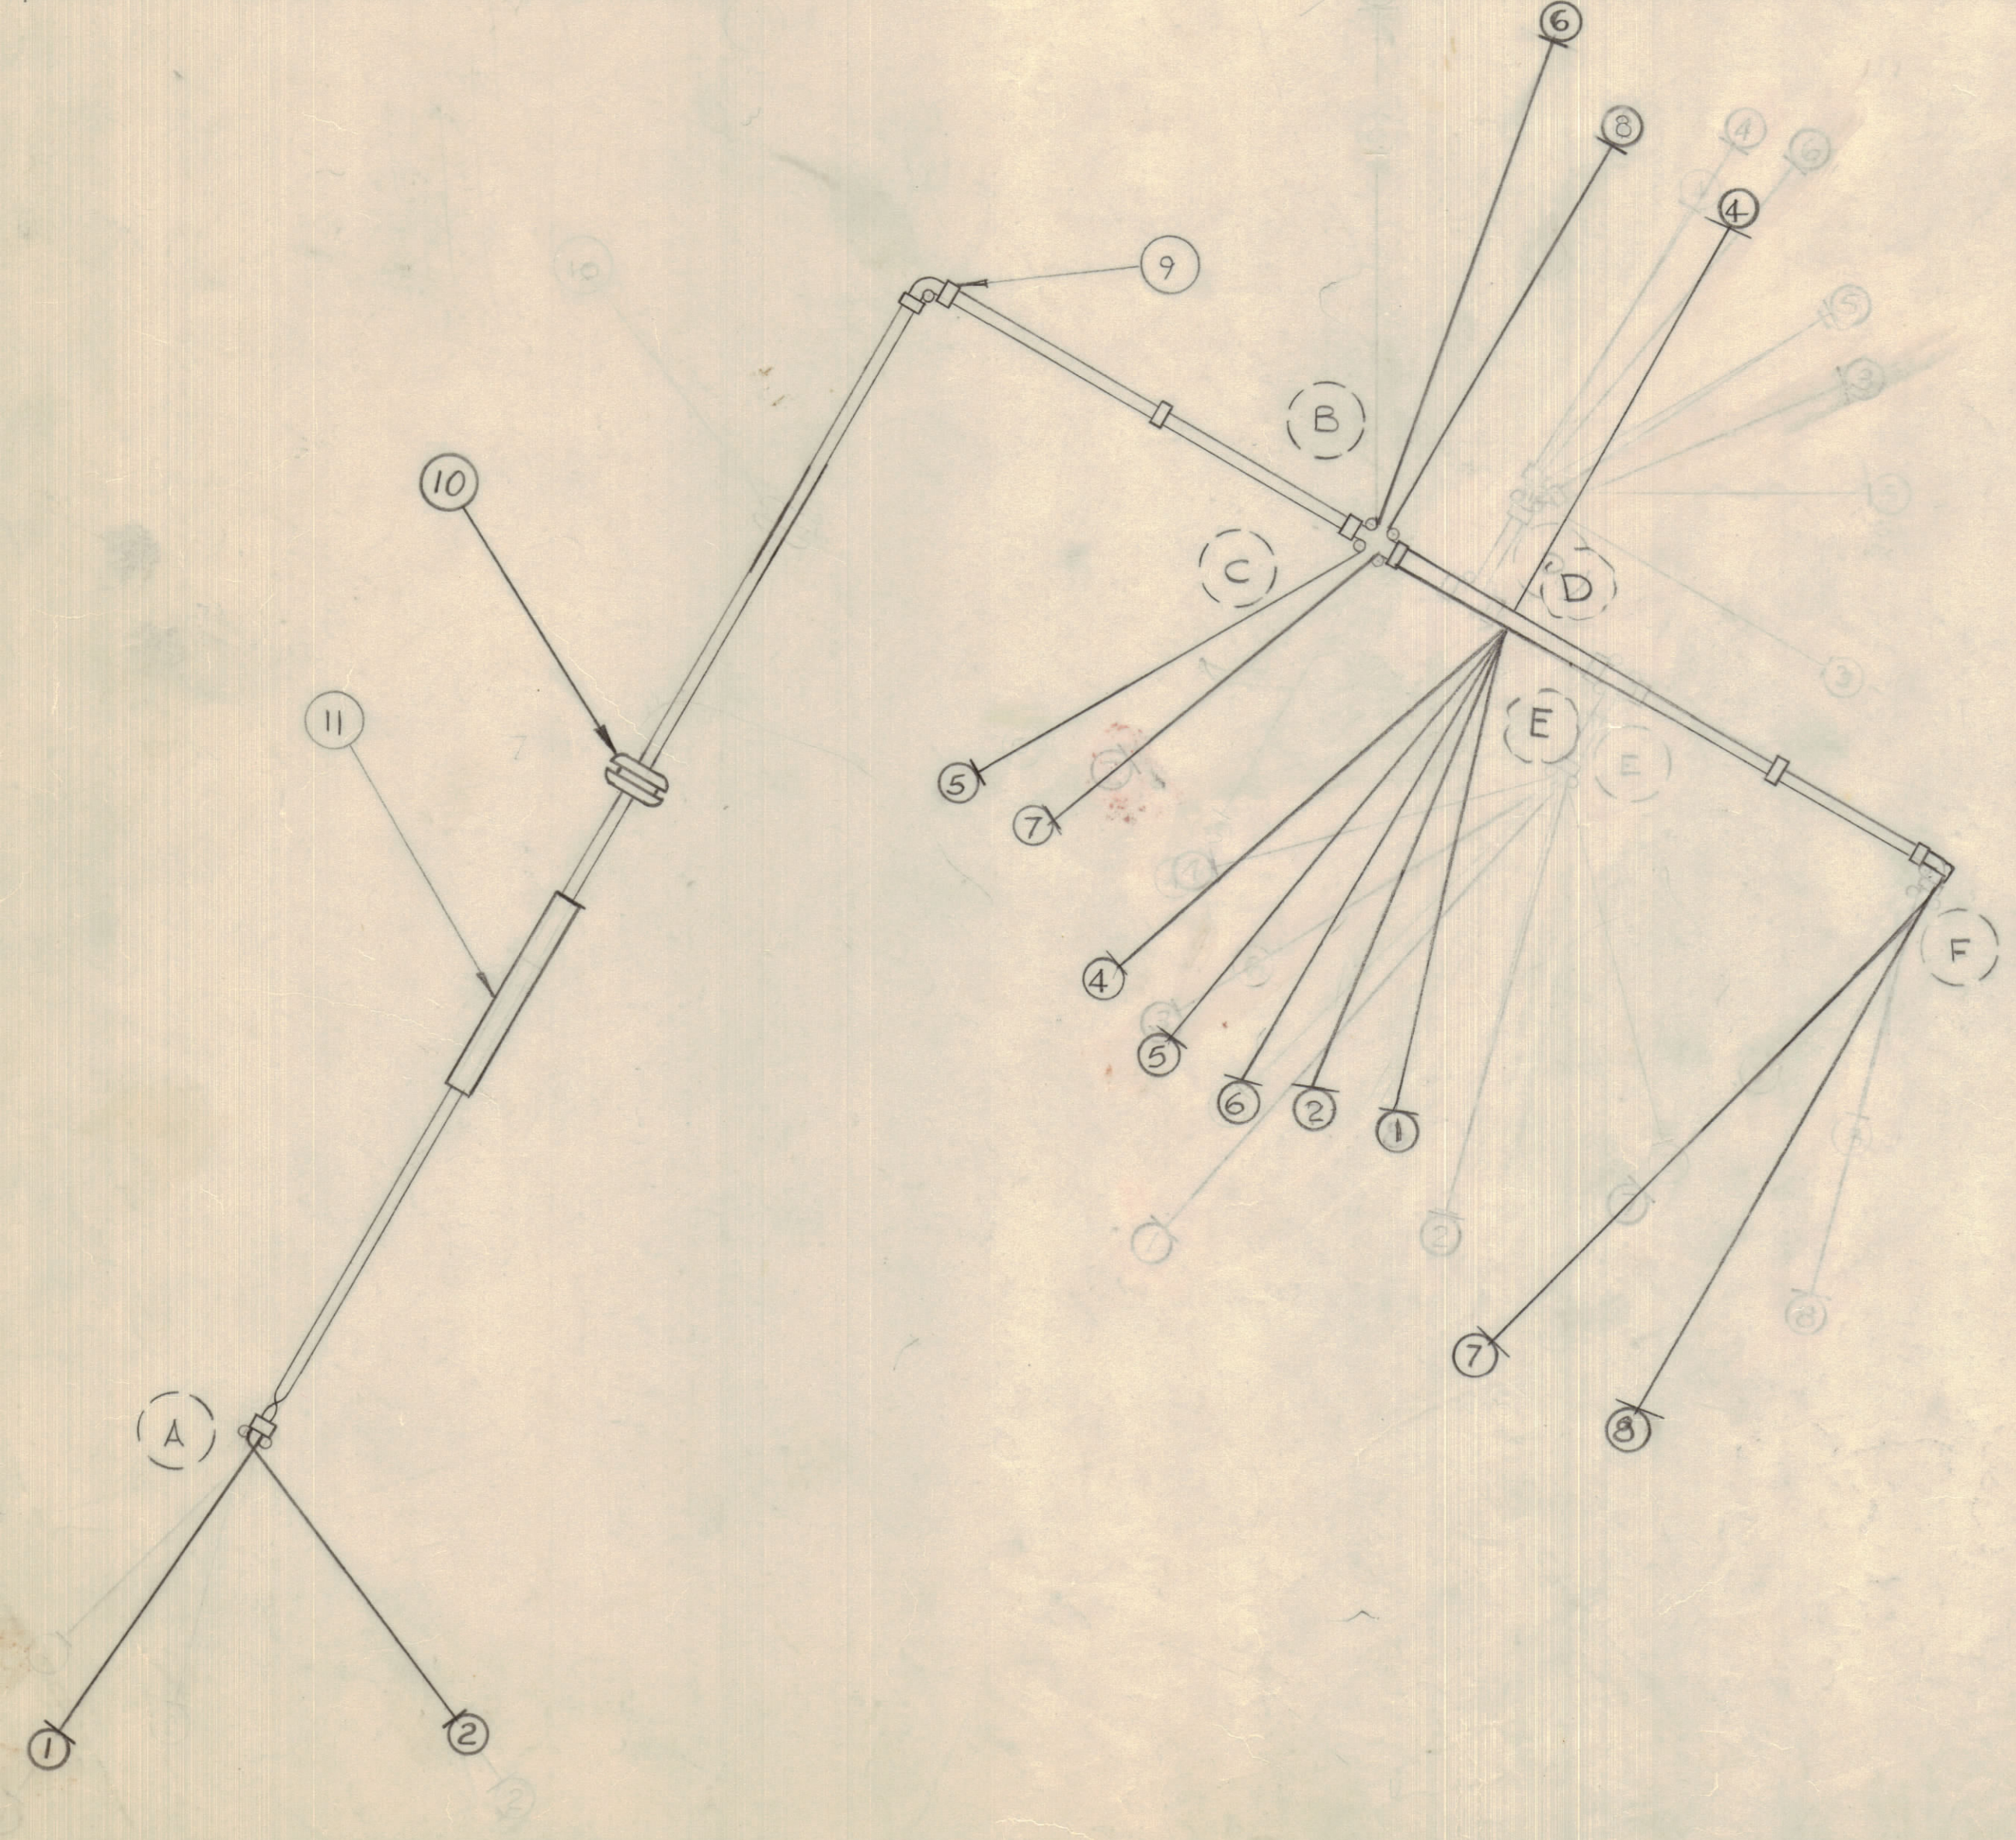

CA10537 E

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

SYMBOL	DENOTES
○	ITEM
○	BREAKOUT

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± .05 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074/69	3 JAN 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		WIRING HARNESS BRANCHED	
TYPE & TEMPER		SIMPSON	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10537 F	