


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M. NO.	DRAFT	CHKD
0		ORIGINAL RELEASE FOR PRODUCTION	5/13/65		GDL	
A		REVERSED COLLECTS ON BREAKOUT 6, CALIBRE ON BREAKOUT 9	12-17-65	14245		
B		CHART ADDED; ITEM 16 WAS K1001 PIN 6	12-23-66	17586	WHO	

- DENOTES ITEM No.
- ▽ DENOTES PIN No
- DENOTES MARKER CABLE
- DENOTES BREAK POINT

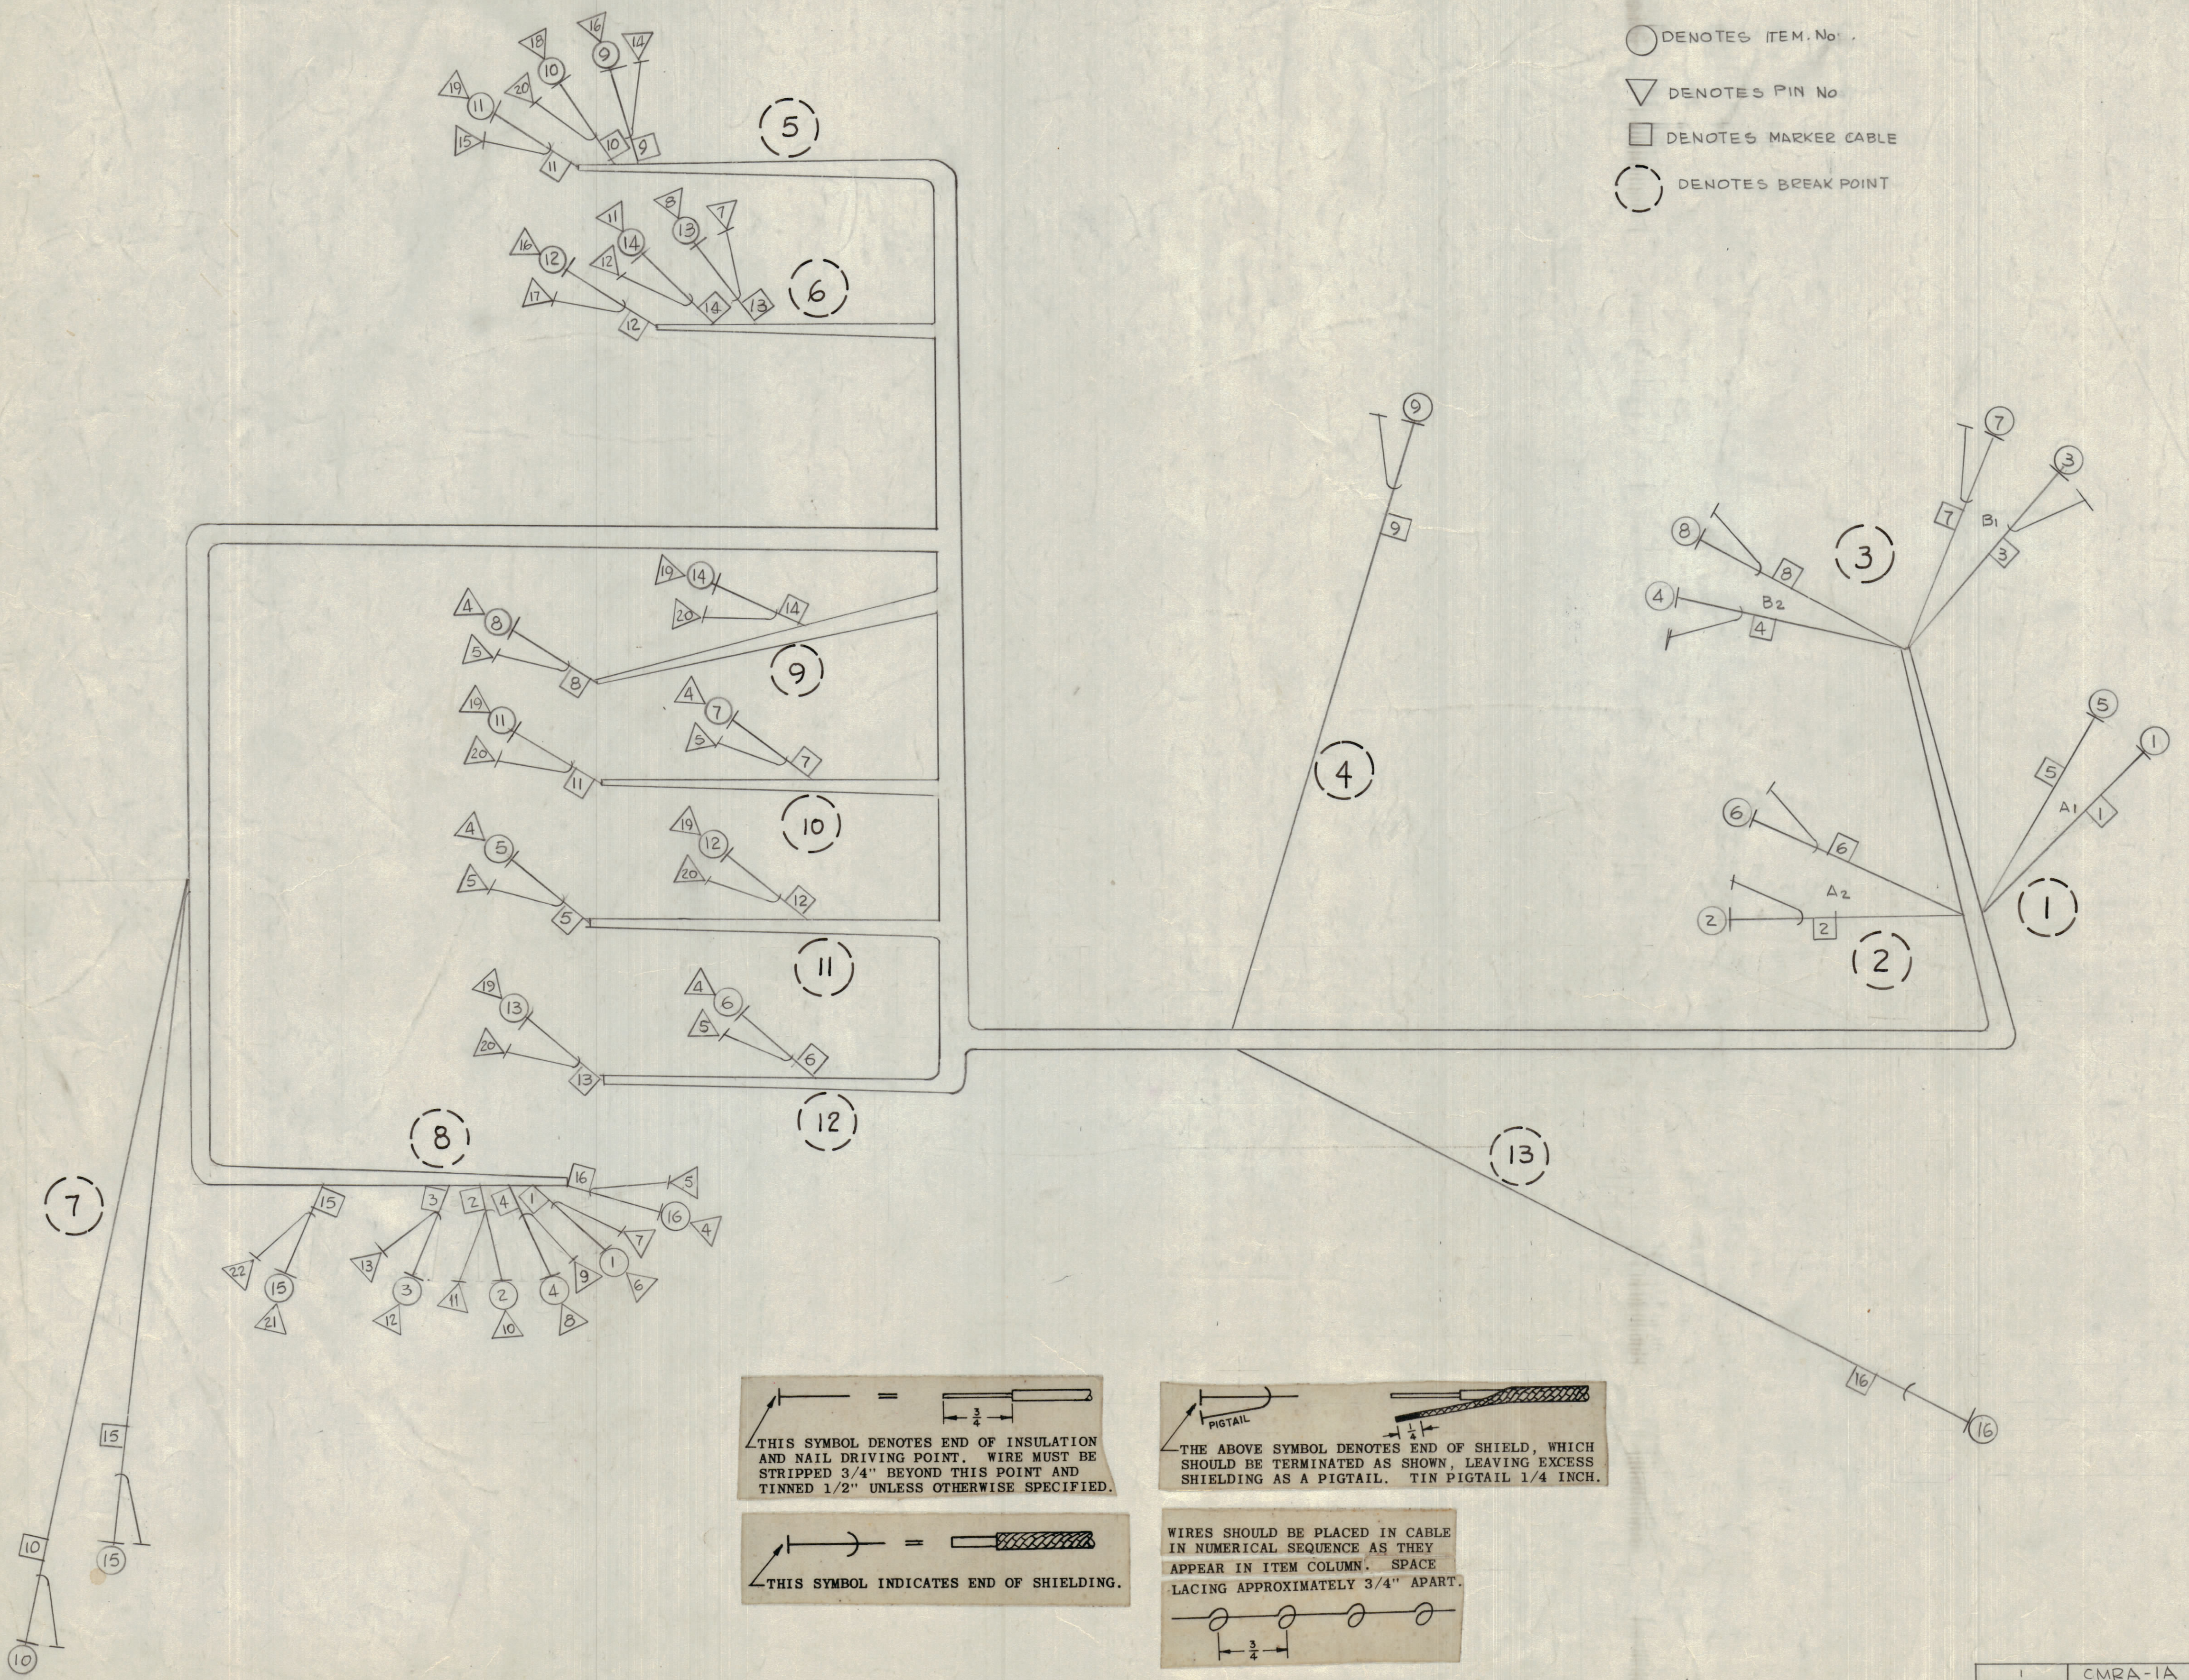

ITEM	CMRA-1	CMRA-1A
16	K1001 PIN 6	S1003A

ITEM	QTY	DESCRIPTION	FROM	TO	SYMBOL
16	19	LA 101			BANDMARKER, CABLE (1-16)
X	18	BS100			SOLDER, TIN ALLOY
X	17	CD 101 -1MW			CORD, NYLON LACING
8	13	16	RG174/U		J1003 PIN 4 SEE CHART
7	8	15		J1014	J1003 21
9	6	14		J1007 PIN 19	J1009 11
12	6	13		J1004 PIN 19	J1009 8
11	6	12		J1005 PIN 19	J1009 16
10	5	11		J1006 PIN 19	J1010 19
7	5	10		J1013 IMC INPUT	J1010 18
4	5	9		S1003A	J1010 16
3	9	8		B2 POTENTIOMETER	J1007 4
3	10	7		B1	J1006 4
2	12	6		A2	J1004 4
1	11	5		A1	J1005 4
3	8	4		B2	J1003 8
3	8	3		B1	J1003 12
2	8	2		A2	J1003 10
1	8	1	RG174/U	A1 POTENTIOMETER	J1003 PIN 6

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

THIS SYMBOL INDICATES END OF SHIELDING.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

QTY	UNIT	MODEL USED ON	ASSY. NO.
1		CMRA-1A	
1		CMRA-1	

LIST OF MATERIAL			
MATERIAL	FINISH	TITLE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
WIRING HARNESS BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN G.D.L.	DATE 5-13-65	FINAL APPROVAL
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.	CHECKED	DATE 5/13/65	DATE
DECIMALS ±.05 XX ±.01 XXX ±.005	ELECT. DES. W.P.	DATE	DATE
FRACTIONS ± 1/84 ANGLES ± 30'	MECH. DES.	DATE	DATE
NOTES		CA1124 B	

CA1124 B