


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
	X1	BUILDUP CLARIFIED	4-8-66	X1	G.O.L.	
	Ø	ORIGINAL RELEASE FOR PROD	9/1/66			

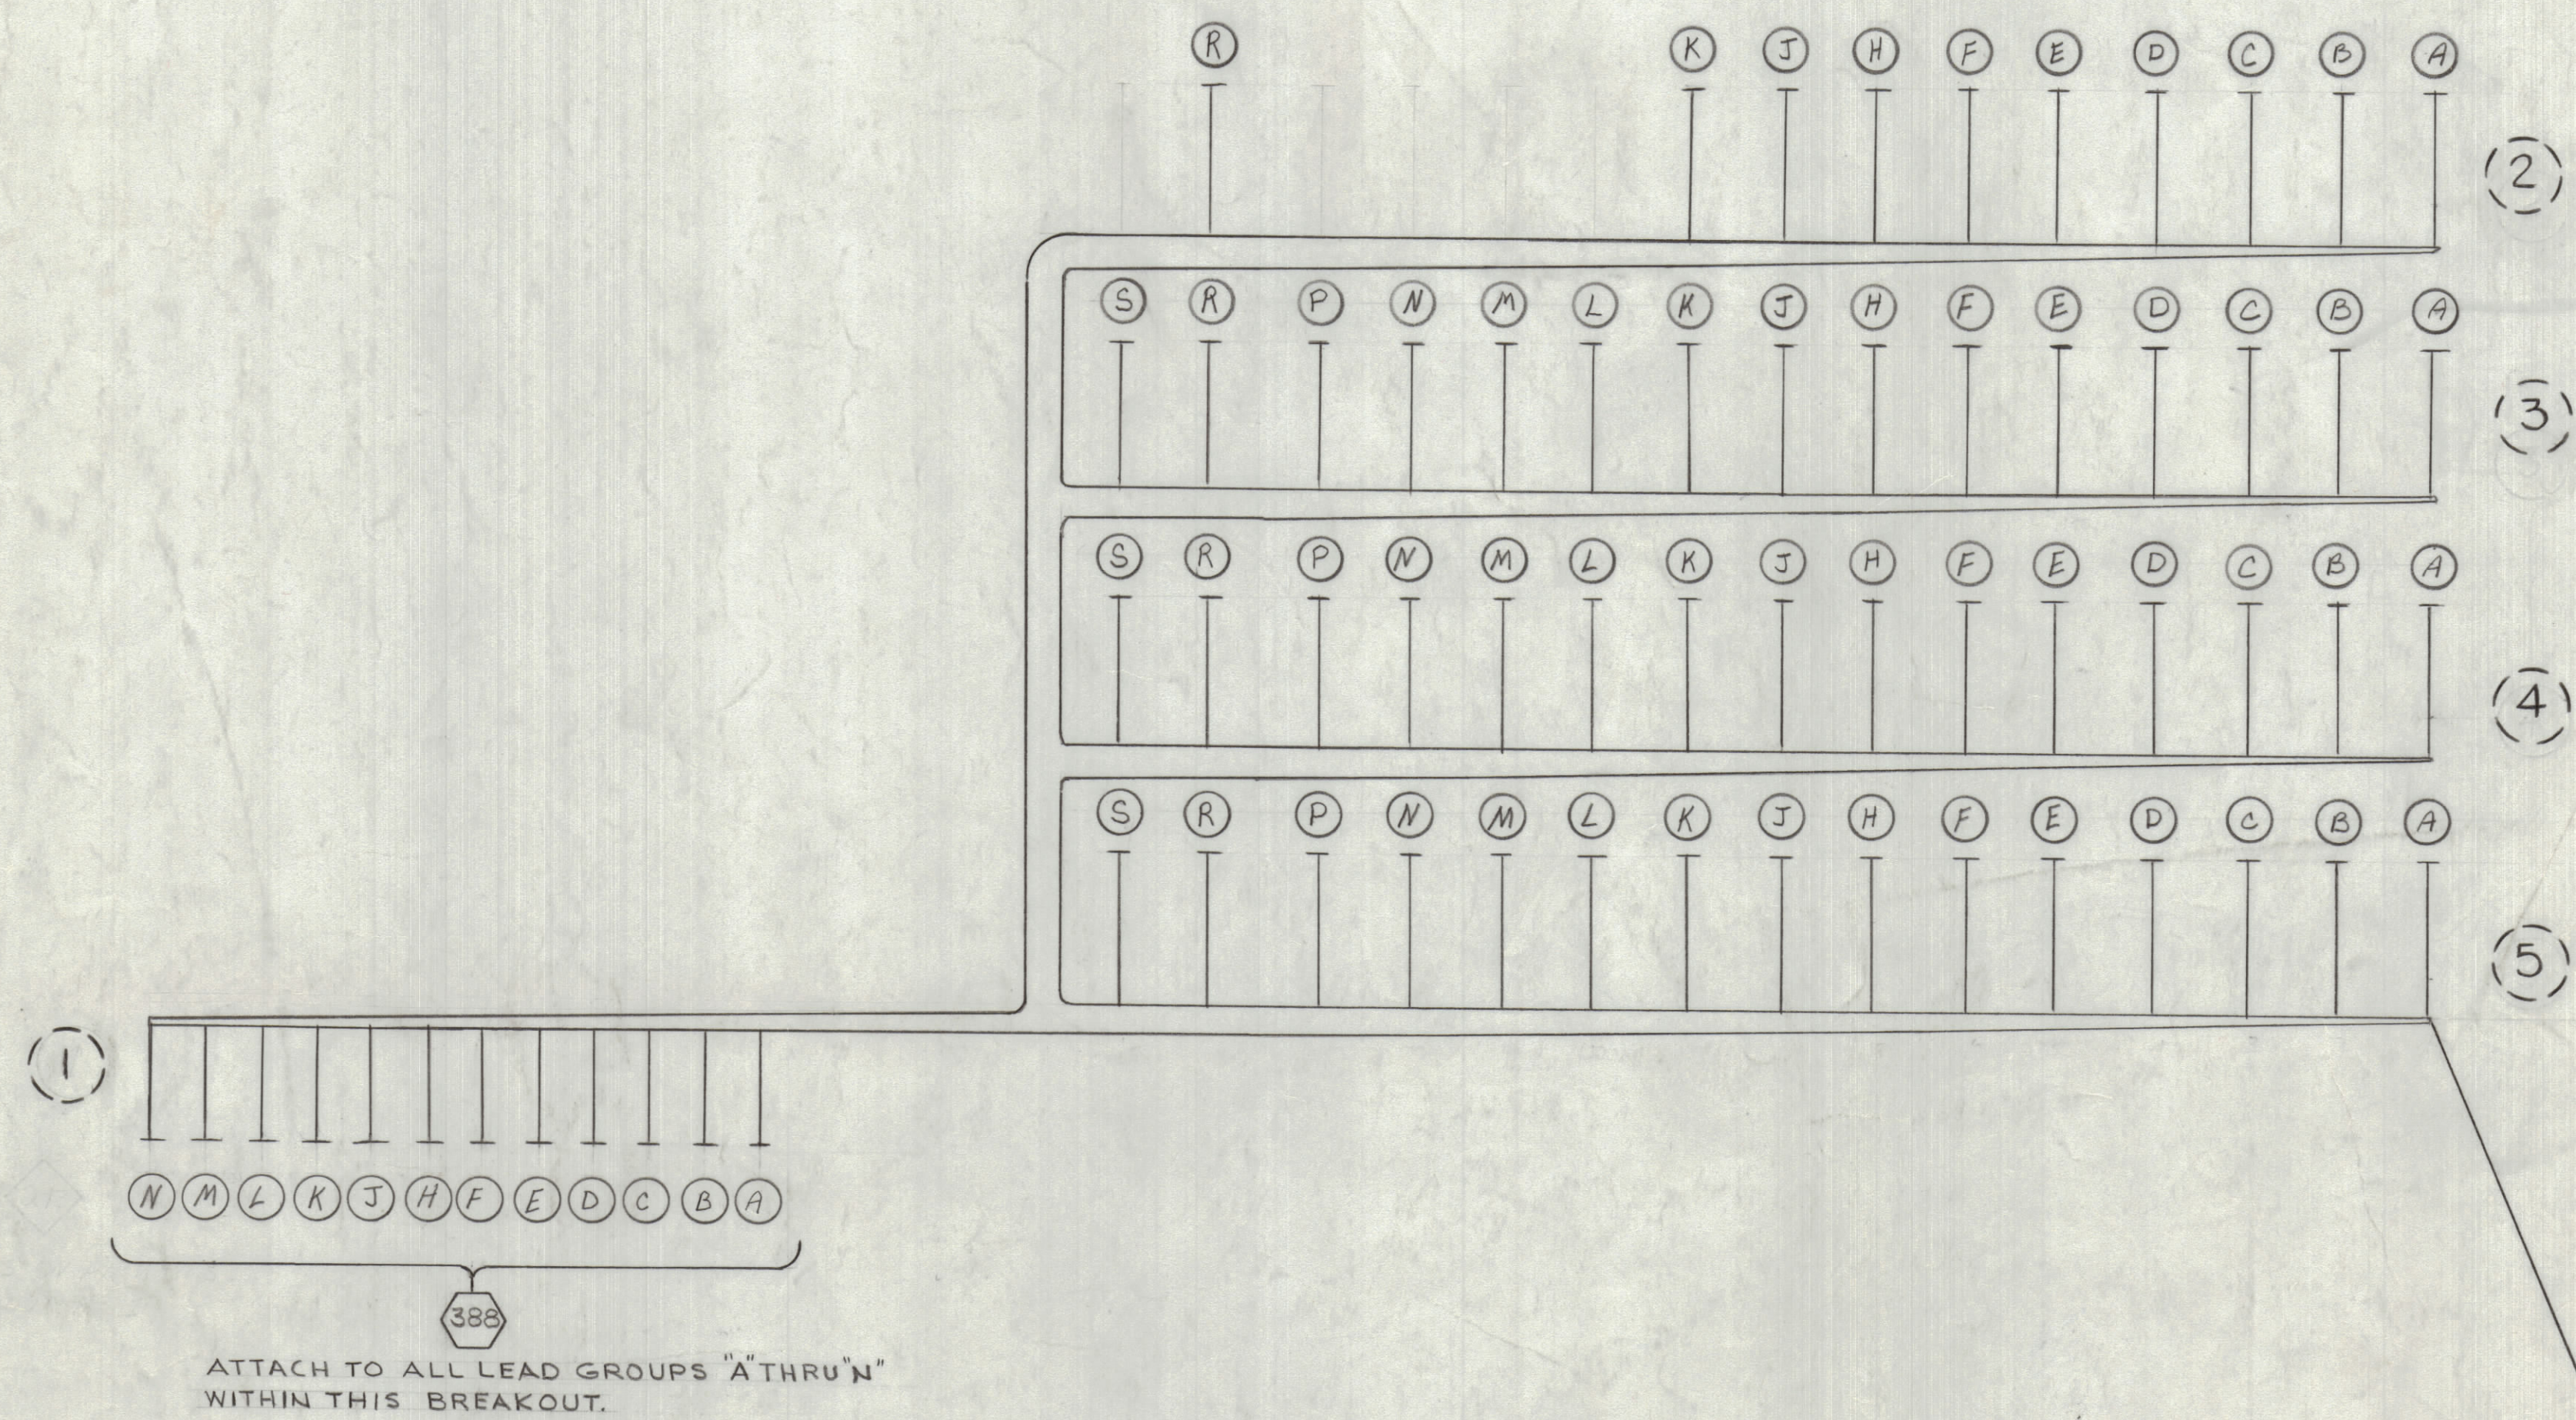

ATTACH TO ALL LEAD GROUPS "A THRU N" WITHIN THIS BREAKOUT.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

**SYMBOLS**

- ⊖ DENOTES MAIN BRANCH BREAKOUTS.
- DENOTES LEAD BREAKOUTS.
- ⬡ DENOTES ITEM NUMBERS.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

**NOTES**

1	RTPH-1	
SCALE	MODEL USED ON	ASS'Y. NO.
1/1		

QTY	UNIT	DESCRIPTION	SYMBOL
F. E. EATON LIST OF MATERIAL			
MATERIAL THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH TITLE WIRING HARNESS, BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN W. M. LEAN	DATE 9/1/66
CHECKED J. L. [Signature]		DATE 9/1/66	FINAL APPROVAL [Signature]
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		ELECT. DES. [Signature]	DATE 9/1/66
FRACTIONS ± 1/64 ANGLES ± 0° 30'		MECH. DES. [Signature]	DATE 4-5-66
TOLERANCES		REV. LTR.	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.